

# Rod Ends, Sphericals, Rolling Element Bearings



The First Name in Rod Ends™



Heim® Bearings  
ISO 9001:2000  
AS9100

[www.rbcbearings.com](http://www.rbcbearings.com)  
800.390.3300

RBC Bearings Incorporated (RBC Bearings, RBC) has had a long tradition of innovation, commitment, and quality since the company was founded in 1919. Today, RBC Bearings has grown into a world-class manufacturer of standard and custom-engineered bearings and related products, with a product focus on research, testing, and development of the best product for specific applications.

## What We Manufacture

RBC Bearings, with facilities throughout North America and Europe, provides bearings and precision products for applications in the construction, mining, material handling, transportation and off-highway equipment, robotics and automation, farming, machine tool, and semiconductor equipment industries. Through RBC Aerospace Bearings, the company is a major manufacturer of highly-engineered bearings and precision products for military, defense, and commercial aerospace applications.

RBC's high-quality bearings include:

- **Heavy Duty Needle Roller Bearings** - Pitchlign® caged heavy duty needle roller bearings, inner rings, type TJ TandemRoller® bearings for long life.
- **Spherical Plain Bearings** - Radial, angular, contact, high misalignment, extended inner ring, DuraLube™ maintenance-free spherical plain bearings, QuadLube® long life bearings, ImpactTuff® case carburized bearings, ShimPack® double-acting angular contact bearings, CrossLube® lubrication groove systems, SpreadLock® Seal, and MillTuff™ 3-part bearings.
- **Cam Followers and Yoke Rollers** - Standard stud, heavy stud, yoke type, caged roller followers, RBC Roller® long life cam followers, HexLube® universal cam followers, airframe track rollers. Mastguide rollers and carriage rollers, chain sheaves (for leaf chain), toothless sprockets (for roller chain), and heavy-duty roller bearing construction.
- **Rod Ends** - Commercial and aerospace, precision, Mil-Spec series, self-lubricating, inch and metric. Heim®, Unibal®, and Spherco® brands.
- **Self-Lubricating Bearings** - Radial, thrust, rod ends, spherical plain bearings, high temperature, high loads, inch and metric. Fiberglide® brand.
- **Thin Section Ball Bearings** - Standard cross sections to one inch. Sizes to 40 inches. Stainless steel and other materials available. Seals available on all sizes and standard cross sections.
- **Airframe Control Bearings** - Ball bearing types, self-lubricating types, needle rollers, track rollers.
- **Ground, Semiground, and Unground Ball Bearings** - Full complement, utilizes design and burnished races for higher loads, long life, and smooth operation.
- **Dowel Pins, Loose Needle Rollers, Shafts**
- **Tapered Roller and Tapered Thrust Bearings** - Case-hardened and through-hardened in a variety of sizes, used in Class 8 heavy truck and trailer wheel bearings, final drive transmissions and gear boxes.
- **Custom Designed Bearings** - RBC produces a wide range of custom bearings in various materials for specific applications.

## Heim Rod Ends

Heim Bearings produces the industry's widest range of rod end types and sizes. Heim's product range includes rod ends with brass race inserts in standard, precision, and high capacity designs; high strength two piece designs; self-lubricating rod ends with engineered thermoplastic races or Teflon® liners; and military standard rod ends for the ultimate in rod end performance. Heim rod ends are also available with a variety of platings, coatings, and materials, and with a wide range of optional features such as lubrication fittings, left hand threads, and keyway slots.

## Heim Spherical Bearings

Heim uses a wide variety of designs and materials to offer a comprehensive line of spherical bearings. Standard Heim spherical bearing designs include steel on steel precision spherical bearings with brass race inserts, high capacity, self-lubricating spherical bearings with Teflon® liners, and military standard spherical bearings. Standard material choices range from plain carbon steel to stainless steel.

## Heim Unibal® Ball Bearings

Heim's unique unground ball bearing is a high capacity, full complement, unitized bearing which provides long life and smooth operation in an economical package. Solid races (not split) which are unbroken by loading slots provide longer life than other unground ball bearings and will accommodate thrust loading. Heim ball bearings are available with plain and flanged ODs, and in an extra capacity design. Heim also designs and produces a wide range of special ball bearings.

## How We Can Serve You

RBC has implemented a total quality control system that uses statistical quality control at all facilities, and manufactures in high volume to a just-in-time program.

To serve the ongoing needs of customers, RBC has a network of over 1,600 distributors and sales engineers throughout North and South America and Europe, with authorized agents worldwide. For assistance with your bearing application, contact:

**Customer Service - 800.390.3300**

## Warranty

RBC products are warranted for material and workmanship for a period not to exceed 90 days from shipment and for a value not to exceed purchase price. No other warranty is in effect.

### Disclaimer and Intellectual Property Statement

The materials comprising this Catalog are provided by RBC Bearings Incorporated ("RBC Bearings, RBC") as a service to its customers on an "as-is" basis for informational purposes only. RBC assumes no responsibility for any errors or omissions in these materials. RBC makes no commitment to update the information contained herein.

RBC makes no, and expressly disclaims any, representations or warranties, express or implied, regarding the Catalog, including, without limitation, any implied warranties of merchantability or fitness for a particular purpose. RBC makes no, and expressly disclaims any, warranties, express or implied, regarding the correctness, accuracy, completeness, timeliness, and reliability of the text, graphics and any other items in the Catalog. Under no circumstances shall RBC, its affiliates, or any of their respective partners, officers, directors, employees, agents or representatives be liable for any damages, whether direct, indirect, special or consequential damages for lost revenues, lost profits, or otherwise, arising from or in connection with this Catalog and the materials contained herein.

All materials contained in the Catalog are protected by copyright laws, and may not be reproduced, republished, distributed, transmitted, displayed, broadcast or otherwise exploited in any manner without the express prior written permission of RBC.

RBC's names and logos and all related trademarks (including RBC Part Numbers, Series Numbers, and Cone and Cup Numbers), tradenames, and other intellectual property are the property of RBC Bearings and cannot be used without its express prior written permission.

## TABLE OF CONTENTS

	Page No.
<b>Rod Ends</b>	
Selection Guide	2-3
HM, HF, HMX G, HFX G, BHM, HM C, HF C, M CR, F CR CMHD, CFHD HM M, HF M, M M, F M HME M, HFE M ME, FE SM, SMG, SF, SFG	Precision 4-7 Commercial 8-11 Engineered Thermoplastic Race 12-13 Aircraft 14-17 Self Lubricating 18-19 SAE-AS81935 (formerly MIL-B-81935) Metric Precision 24-25
Technical Section	26-29
<b>Spherical Bearings</b>	
LSS, LS, LHA, LHB, LHSS, COS LHSSE, LHSSVV COM, LH D, LH PP NE, NEG, NEE, NEEG (Narrow) WE, WEG, WEE, WEEG (Wide) SS	Precision 30-33 Self Lubricating 34-35 Commercial 36-37 SAE-AS81820 (formerly MIL-B-81820) SAE-AS81820 (formerly MIL-B-81820) Metric Precision 46
Technical Section	47-48
<b>Sleeve Bearings</b>	
General Specifications	49
PBE (Plain) FBE (Flanged)	SAE-AS81934/1 (formerly MIL-B-81934/1) SAE-AS81934/2 (formerly MIL-B-81934/2)
Technical Section	52
<b>Ball Bearings</b>	
General Specifications	53
R RF HK A	Standard O.D. 54 Flanged O.D. 55 Extra Capacity 56
Applications	57
<b>Special Bearings</b>	58-59
Notes	60-61

**H**heim rod ends and spherical plain bearings are intended for linkage applications where a bearing must accommodate significant misalignment. While spherical plain bearings offer flexibility in housing and mounting design, the user bears the responsibility for housing design and the cost of housing manufacture. Rod ends offer greater mounting convenience and provide a compact, lightweight, economical design alternative to the spherical plain bearing. Heim Bearings Company offers the industry's widest selection of rod end types and sizes.

## Rod End Construction

Heim offers three basic rod end constructions. The **four piece rod** end uses race inserts, typically of brass, to provide lubricity in the bearing area. This design offers reduced internal clearance, and provides smoother operation. It is ideal for dynamic applications. The **two piece** rod end uses a rod end body which is formed around a spherical ball. The comparatively heavy cross section of the rod end body in the two piece design provides high strength. This makes the two piece rod end ideal for highly loaded, static applications where high strength is required. The **cartridge type** rod end consists of a spherical plain bearing mounted in a rod end body. This design allows the optimum selection of materials for ball, race and rod end body. The cartridge type rod end can also accommodate a PTFE liner for self-lubrication. This design is best suited for aircraft and military applications where material selection is a primary design consideration.

## Self-lubricating Rods Ends

Heim produces metal-to-metal rod ends and self-lubricating rod ends. All metal-to-metal rod ends, including brass insert four piece types, require regular lubrication. This can be accomplished by splash or immersion oil lubrication, or by greasing through optional lubricators (grease fittings). Self-lubricating types are used where relubrication is not practical, or in applications where relubrication is not desirable, such as on food processing machinery or in clean environments. Heim self-lubricating rods ends are available with bonded PTFE fabric liners, or with molded, engineered thermoplastic race inserts.

## Rod End Grades

Heim rod ends are offered in four grades: precision, commercial, aircraft, and military. **Precision** rod ends are manufactured to tight tolerances for applications requiring improved linkage accuracy and reduced looseness. **Commercial** rod ends are produced using standard materials and manufacturing methods, and are an economical choice for industrial applications. **Aircraft** rod ends use premium materials, and have magnafluxed rod end bodies. Originally intended for aircraft applications, aircraft rod ends are used in many industrial applications where a high degree of reliability is required. **Military** rod ends are produced in strict accordance with all applicable military specifications and are typically used in military and commercial aviation applications, or when Mil-Spec approval is required.

*Precision Rod Ends* Grade HM and HF four piece precision rod ends use brass race

inserts for lubricity and clearance control. They are produced to tight tolerances for applications requiring a more precise rod end; for example, a linkage where positioning accuracy is essential. These rod end bodies and balls are plated for corrosion resistance. Series BHM, HFX G and HMX G four piece precision extra capacity rod ends are the high strength series intended for more heavily loaded, static and dynamic industrial applications. These rod ends have heat treated bodies for increased strength and aluminum bronze race inserts for high bearing capacity. The rod end bodies are protective coated for corrosion resistance and the balls are chrome plated for superior wear and corrosion resistance. Series BHM (male) and series HFX G (female) have common thread sizes. Series HMX G (male) have oversized shanks for additional shank strength.

- Series HM and HF: pages 4-5
- Series BHM, HFX G and HMX G: pages 6-7

# HEIM UNIBAL® ROD ENDS

ROD END QUICK SELECTION GUIDE			
Series Size Range	Product Features	Customer Benefits	Common Ap- plications
HM, HF 3/16" to 1"	Precision Grade Brass Inserts Four Piece Construction	Low Friction, Long Dynamic Life, Smooth Feel, Good Conformity	Control Linkages, For Reduced Play, Accelerator Linkages
BHM, HFX G, HMX G 1/4" to 3/4"	Precision Grade Aluminum Bronze Inserts, High Strength Body, Four Piece Construction	High Capacity Version	Heavy Duty Applications
HM C, HF C 3/16" to 3/4"	Commercial Grade Brass Inserts Four Piece Construction	Low Friction, Long Dynamic Life, Smooth Feel, Good Conformity	Packaging Machine Linkages
M CR, F CR 3/16" to 3/4"	Commercial Grade Two Piece Construction	High Loads, Reversing Loads, Shock Loads, Cost Effective	Brake and Clutch Pedals For Heavy Machinery, Satellite Dish Controls
CMHD, CFHD 3/16" to 3/4"	Commercial Grade Self Lubricating Thermoplastic Race, Maximum Temperature 125°F	Maintenance Free	Food Processing, Paper Machinery, Bus Door Closures

		LOADING						CORROSION RESISTANCE			TEMPERATURE		SIZE RANGE	RACE MATERIAL	DESIGN
		STATIC	OSCILLATING	REVERSING	SHOCK	PRECISION		SELF-LUBRICATING	MIL-SPEC MIL-B-81935	MAXIMUM					
COMMERCIAL AND PRECISION	HEIM SERIES	PAGE								250°F		3/16" to 1"	BRASS	FOUR PIECE	
	HM HF	4-7	⊕	⊕	⊕	⊕	✓	⊕							
	BHM HFX G HMX G	4-7	●	●	●	⊕	✓	⊕		250°F		1/4" to 3/4"	ALUMINUM BRONZE		
	HM C HF C	8-11	⊕	⊕	⊕	⊕		⊕		250°F		3/16" to 3/4"	BRASS		
	M CR F CR	8-11	⊕	○	⊕	●		⊕		250°F		3/16" to 3/4"	STEEL		
AIRCRAFT AND MILITARY	CMHD CFHD	12-13	○	⊕	⊕			⊕	✓		125°F	3/16" to 3/4"	THERMO-PLASTIC	MOLDED RACE	
	HM M HF M	14-17	⊕	⊕	⊕	⊕	✓	⊕		250°F		1/8" to 1"	BRASS		
	M M F M	14-17	⊕	⊕	⊕	⊕	✓	⊕		250°F		3/16" to 1/4"	BRASS		
	HME M HFE M	18-19	○	⊕	⊕	⊕	✓	⊕	✓	250°F		3/16" to 1"	PTFE		
	ME FE	20-23	●	●	●	●	●	✓	●	350°F		3/16" to 1"	PTFE		

**Commercial Rod Ends** Series HM C and HF C four piece commercial rod ends use Heim's classic brass race insert design for lubricity and clearance control. These rod ends are preferred for dynamic applications. Heim commercial rod ends have zinc plated bodies and nickel plated balls for corrosion resistance. Series M CR and F CR two piece commercial rod ends offer high strength for heavy static loads. Heim's unique manufacturing process for two piece rod ends yields the industry's best conformity between ball and body for maximum bearing capacity.

- Series HM C and HF C: pages 8-9
- Series M CR and F CR: pages 10-11

Series CMHD & CFHD self-lubricating commercial rod ends use an engineered thermoplastic race for applications where relubrication is not practical or desirable. The rod end body and ball are plated for corrosion resistance. This series is also available in stainless steel for superior corrosion resistance.

- Series CMHD and CFHD: pages 12-13

**Aircraft Rod Ends** Series HM M and HF M four piece aircraft rod ends have magnafluxed rod end bodies for a high degree of assurance of rod end integrity. The bearing surface is a chrome plated ball on brass race inserts. This series was originally intended for general aviation applications and is also used in many industrial applications where rod end reliability is critical. Series M M and F M special purpose aircraft rod ends use materials and construction identical to series HM M and HF M but have different dimensions. Series HME M and HFE M self lubricating aircraft rod ends use Heim's UNIFLON® PTFE liner and cartridge type construction. The Heim UNIFLON® PTFE liner is approved to SAE-AS81820 (formerly MIL-B-18820).

- Series HM M and HF M: pages 14-15
- Series M M and F M: pages 16-17
- Series HME M and HFE M: pages 18-19

**Military Rod Ends** Series ME and FE mil-spec rod ends use Heim's Type E UNIFLON® PTFE liner and cartridge type construction. Rod end bodies are made from 4340 alloy

steel, heat treated to SAE-AMS-H-6875 (formerly MIL-H-6875), and are cadmium plated. The outer races are made from heat treated 17-4PH stainless steel (ASM 5643). The balls are made from heat treated 440C stainless steel (AMS 5630). The Heim UNIFLON® PTFE liner is approved to SAE-AS81820 (formerly MIL-B-81820). The ME and FE series mil-spec aircraft rod ends are approved to SAE-AS81935 (formerly MIL-B-81935). These premium rod ends are primarily intended for use in commercial and military aviation applications.

- Series ME: pages 20-21
- Series FE: pages 22-23

**Metric Rod Ends** Series SM, SMG, SF and SFG four piece, precision, metric rod ends use brass race inserts for lubricity and clearance control. They are produced to tight tolerances for applications where a precision rod end is required in a metric size. The two piece construction offers the added benefit of high strength for high loads. Heim also offers a wide variety of other metric rod ends. Contact Heim for availability and specifications.

- Series SMG and SFG: Pages 24-25

## Optional Rod End Features


Heim rod ends are available with male and female threaded shanks. Standard rod ends have right hand threads. Left hand threads are available as an option. Lubricators are standard on selected series and are available as an option on all other series. Shank keyways are optionally available on most series to engage lock washer tangs. A wide range of other optional features includes plain shanks and special plating.



# Precision Series

## Four Piece - Metal to Metal

ROD  
ENDS

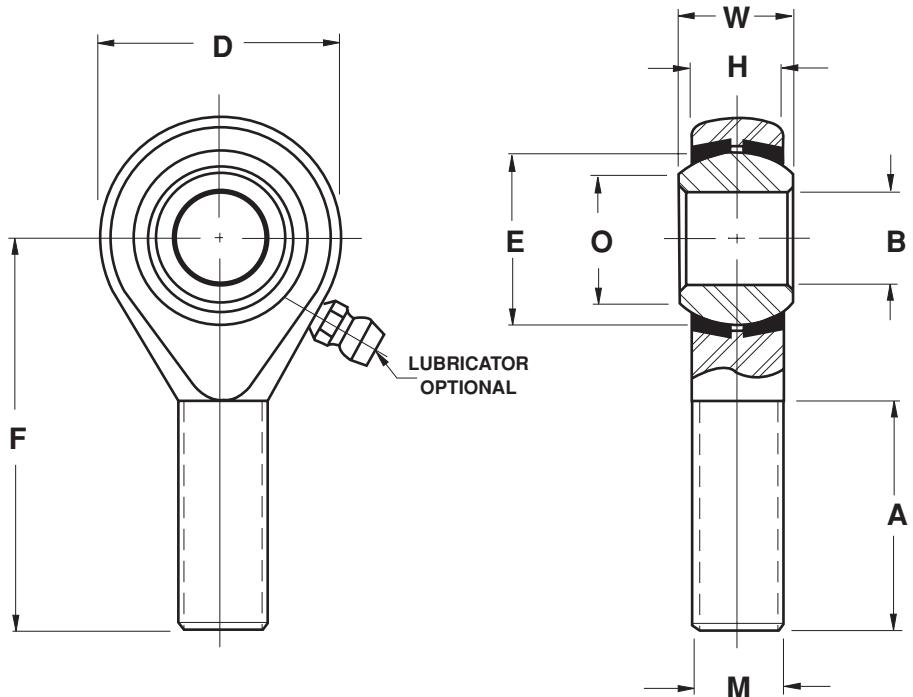

### Series HM

ROD END NUMBER	DIMENSIONS IN INCHES									MAXIMUM STATIC RADIAL LOAD <sup>⑦</sup>	APPROX WEIGHT
	BORE	BALL WIDTH	HOUSING WIDTH	HEAD DIAMETER	LENGTH TO CENTER OF BALL	THREAD LENGTH	THREAD SIZE	BALL DIAMETER	BALL FLAT DIAMETER		
	<b>B</b>	<b>W</b>	<b>H</b>	<b>D</b>	<b>F</b>	<b>A</b>	<b>M</b>	<b>E</b>	<b>O</b>		
HM3	.1900	.312	.250	.625	1.250	.750	.1900-32	.437	.306	900	.03
HM4	.2500	.375	.281	.750	1.562	1.000	.2500-28	.515	.353	1,700	.05
HM5	.3125	.437	.344	.875	1.875	1.250	.3125-24	.625	.447	2,500	.08
HM6	.3750	.500	.406	1.000	1.938	1.250	.3750-24	.718	.516	4,000	.12
HM7	.4375	.562	.437	1.125	2.125	1.375	.4375-20	.812	.586	5,000	.17
HM8	.5000	.625	.500	1.312	2.438	1.500	.5000-20	.937	.698	7,000	.26
HM10	.6250	.750	.562	1.500	2.625	1.625	.6250-18	1.125	.839	8,050	.41
HM12	.7500	.875	.687	1.750	2.875	1.750	.7500-16	1.312	.978	11,300	.64
HM16 <sup>⑥</sup>	1.0000	1.375	1.000 <sup>⑤</sup>	2.750 <sup>⑤</sup>	4.125	2.125	1.2500-12	1.875	1.275	28,400	2.25

Outer Member: Carbon steel, with protective coating for corrosion resistance

Ball: 52100 Alloy steel, heat treated, and chrome plated

Inserts: Brass

#### NOTES

<sup>①</sup> Add letter "L" to prefix to indicate Left Hand thread

Example: HML4

<sup>②</sup> For design options, see page 29

<sup>③</sup> For Engineering data, see pages 26 thru 28

<sup>④</sup> "H" tolerance across inserts is  $+.015$

<sup>⑤</sup> Tolerances for 16 size: "D"  $+.030$

$-.010$

"H"  $+.030$

$-.010$

<sup>⑥</sup> Outer Member: Alloy steel


Inserts: One piece carbon steel race

<sup>⑦</sup> Load ratings reflect loads without lubricator.

For loads with lubricator contact Heim Engineering.

# Precision Series

## Four Piece - Metal to Metal

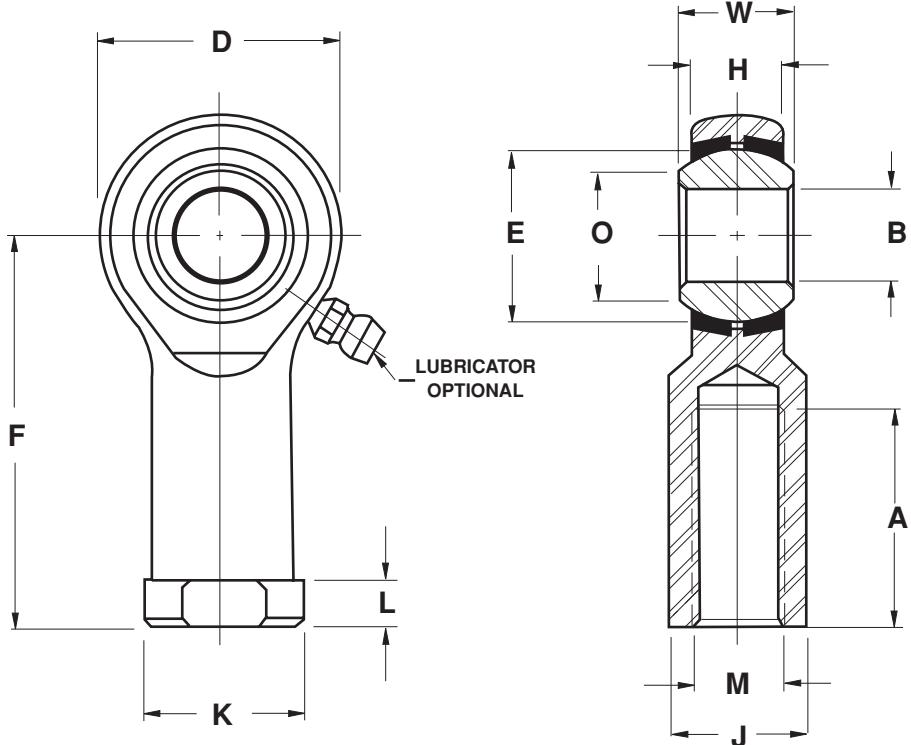

### Series HF

ROD END NUMBER	DIMENSIONS IN INCHES												MAXIMUM STATIC RADIAL LOAD <sup>⑦</sup>	APPROX WEIGHT		
	BORE	BALL WIDTH	HOUSING WIDTH	HEAD DIAMETER	LENGTH TO CENTER OF BALL	THREAD LENGTH	THREAD SIZE	BALL DIAMETER	BALL FLAT DIAMETER	ACROSS WRENCH FLATS	OTHER DIMENSIONS					
	B	W	H	D	F	A	M	E	O	J	K	L				
+ .0015 - .0005	+ .000 - .005	+ .005 - .005	+ .010 - .010	+ .031 - .031	+ .062 - .031	+ .062 - .031	UNF-3B	REF	REF	+ .010 - .010	+ .010 - .010	+ .010 - .010	LBF	LBS		
<b>HF3</b>	.1900	.312	.250	.625	1.062	.562	.1900-32	.437	.306	.312	.406	.187	1,850	.03		
<b>HF4</b>	.2500	.375	.281	.750	1.312	.750	.2500-28	.515	.353	.375	.468	.187	2,700	.05		
<b>HF5</b>	.3125	.437	.344	.875	1.375	.750	.3125-24	.625	.447	.437	.500	.187	3,350	.08		
<b>HF6</b>	.3750	.500	.406	1.000	1.625	.937	.3750-24	.718	.516	.562	.687	.250	4,450	.12		
<b>HF7</b>	.4375	.562	.437	1.125	1.812	1.062	.4375-20	.812	.586	.625	.750	.250	5,350	.17		
<b>HF8</b>	.5000	.625	.500	1.312	2.125	1.187	.5000-20	.937	.698	.750	.875	.250	7,400	.26		
<b>HF10</b>	.6250	.750	.562	1.500	2.500	1.500	.6250-18	1.125	.839	.875	1.000	.312	8,050	.41		
<b>HF12</b>	.7500	.875	.687	1.750	2.875	1.750	.7500-16	1.312	.978	1.000	1.125	.312	11,300	.64		
<b>HF16⑥</b>	1.0000	1.375	1.000 ⑥	2.750 ⑤	4.125	2.125	1.2500-12	1.875	1.275	1.500 ⑤	1.625 ⑤	.437 ⑤	28,400	2.25		

Outer Member: Carbon steel, with protective coating for corrosion resistance

Ball: 52100 Alloy steel, heat treated, and chrome plated

Inserts: Brass

#### NOTES

① Add letter "L" to prefix to indicate Left Hand thread  
Example: HFL 4

② For design options, see page 29

③ For Engineering data, see pages 26 thru 28

④ "H" tolerance across inserts is +/- .015

⑤ Tolerances for 16 size: "D" +.030

- .010

"H" +.030

- .010

"K", "J", "L" +/- .015

⑥ Outer Member: Alloy steel


Inserts: One piece carbon steel race

⑦ Load ratings reflect loads without lubricator.

For loads with lubricator contact Heim Engineering.

# Precision Extra Capacity Series

## Four Piece - Metal to Metal

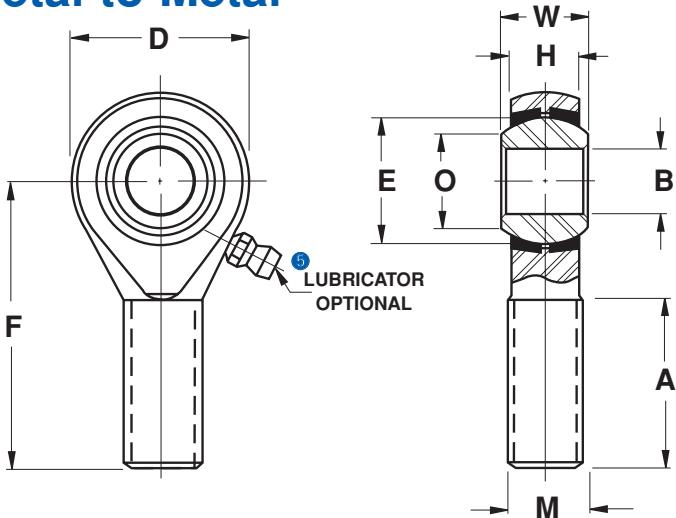

### Series HMX G

ROD END NUMBER	DIMENSIONS IN INCHES									MAXIMUM STATIC RADIAL LOAD		APPROX WEIGHT
	BORE	BALL WIDTH	HOUSING WIDTH	HEAD DIAMETER	LENGTH TO CENTER OF BALL	THREAD LENGTH	THREAD SIZE	BALL DIAMETER	BALL FLAT DIAMETER			
	B	W	H	D	F	A	M	E	O	WITH LUBRICATOR	WITHOUT LUBRICATOR	
<b>HMX4G</b>	.2500	.375	.281	.750	1.562	1.000	.3125-24	.515	.353	3,260	6,680	.06
<b>HMX5G</b>	.3125	.437	.344	.875	1.875	1.250	.3750-24	.625	.447	4,920	8,410	.09
<b>HMX6G</b>	.3750	.500	.406	1.000	1.938	1.250	.4375-20	.718	.516	7,240	11,160	.13
<b>HMX7G</b>	.4375	.562	.437	1.125	2.125	1.375	.5000-20	.812	.586	7,620	13,660	.18
<b>HMX8G</b>	.5000	.625	.500	1.312	2.438	1.500	.6250-18	.937	.698	11,920	19,340	.30
<b>HMX10G</b>	.6250	.750	.562	1.500	2.625	1.625	.7500-16	1.125	.839	13,940	21,080	.46
<b>HMX12G</b>	.7500	.875	.687	1.750	2.875	1.750	.8750-14	1.312	.978	21,570	29,800	.72

Outer Member: 4130 or 4340 Alloy steel, heat treated, magnetic particle inspected, with protective coating for corrosion resistance

Ball: 52100 Alloy steel, heat treated, chrome plated

Inserts: Copper alloy

#### NOTES

### Series BHM

ROD END NUMBER	DIMENSIONS IN INCHES									MAXIMUM STATIC RADIAL LOAD		APPROX WEIGHT
	BORE	BALL WIDTH	HOUSING WIDTH	HEAD DIAMETER	LENGTH TO CENTER OF BALL	THREAD LENGTH	THREAD SIZE	BALL DIAMETER	BALL FLAT DIAMETER			
	B	W	H	D	F	A	M	E	O	WITHOUT LUBRICATOR	LBS	
<b>BHM4</b>	.2500	.375	.281	.750	1.562	1.000	.2500 - 28	.515	.353	4,290	.05	
<b>BHM5</b>	.3125	.437	.344	.875	1.875	1.250	.3125 - 24	.625	.447	6,880	.08	
<b>BHM6</b>	.3750	.500	.406	1.000	1.938	1.250	.3750 - 24	.718	.516	10,500	.12	
<b>BHM7</b>	.4375	.562	.437	1.125	2.125	1.375	.4375 - 20	.812	.586	13,660	.17	
<b>BHM8</b>	.5000	.625	.500	1.312	2.438	1.500	.5000 - 20	.937	.698	19,340	.26	
<b>BHM10</b>	.6250	.750	.562	1.500	2.625	1.625	.6250 - 18	1.125	.839	21,080	.41	
<b>BHM12</b>	.7500	.875	.687	1.750	2.875	1.750	.7500 - 16	1.312	.978	29,800	.64	

Outer Member: 4130 or 4340 Alloy steel, heat treated, magnetic particle inspected, with protective coating for corrosion resistance

Ball: 52100 Alloy steel, heat treated, chrome plated

Inserts: Copper alloy

#### NOTES

① Add letter "L" to prefix to indicate Left Hand thread  
Example: BHML4

② For design options, see page 29

③ For Engineering data, see pages 26 thru 28


④ "H" tolerance across inserts is +/- .015

⑤ Lubricator optional on BHM series

Example: BHM4G

# Precision Extra Capacity Series

## Four Piece - Metal to Metal

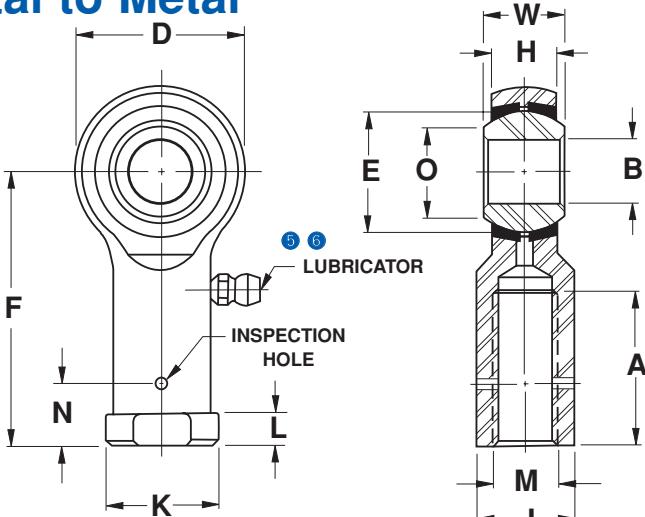

ROD  
ENDS

### Series HFX G

ROD END NUMBER	DIMENSIONS IN INCHES													MAXIMUM STATIC RADIAL LOAD	APPROX WEIGHT		
	BORE	BALL WIDTH	HOUSING WIDTH	HEAD DIAMETER	LENGTH TO CENTER OF BALL	THREAD LENGTH	THREAD SIZE	BALL DIAMETER	BALL FLAT DIAMETER	ACROSS WRENCH FLATS	OTHER DIMENSIONS						
	B	W	H	D	F	A	M	E	O	J	K	N	L				
ROD END NUMBER	BORE	BALL WIDTH	HOUSING WIDTH	HEAD DIAMETER	LENGTH TO CENTER OF BALL	THREAD LENGTH	THREAD SIZE	BALL DIAMETER	BALL FLAT DIAMETER	ACROSS WRENCH FLATS	OTHER DIMENSIONS	MAXIMUM STATIC RADIAL LOAD	APPROX WEIGHT				
<b>HFX4G</b>	.2500	.375	.281	.750	1.312	.750	.2500-28	.515	.355	.375	.468	.312	.187	6,680	.06		
<b>HFX5G</b>	.3125	.437	.344	.875	1.375	.750	.3125-24	.625	.447	.437	.500	.406	.187	8,410	.08		
<b>HFX6G</b>	.3750	.500	.406	1.000	1.625	.937	.3750-24	.718	.517	.562	.687	.469	.250	11,160	.14		
<b>HFX7G</b>	.4375	.562	.437	1.125	1.812	1.062	.4375-20	.812	.586	.625	.750	.531	.250	13,660	.18		
<b>HFX8G</b>	.5000	.625	.500	1.312	2.125	1.187	.5000-20	.937	.698	.750	.875	.594	.250	19,340	.29		
<b>HFX10G</b>	.6250	.750	.562	1.500	2.500	1.500	.6250-18	1.125	.839	.875	1.000	.750	.312	21,080	.43		
<b>HFX12G</b>	.7500	.875	.687	1.750	2.875	1.750	.7500-16	1.312	.978	1.000	1.125	.875	.312	29,800	.64		

**Outer Member:** 4130 or 4340 Alloy steel, heat treated, magnetic particle inspected, with protective coating for corrosion resistance

**Ball:** 52100 Alloy steel, heat treated, chrome plated

**Inserts:** Copper alloy

NOTES

① Add letter "L" to prefix to indicate Left Hand thread.  
Example: HFXL4G

② For design options, see page 29

③ For Engineering data, see pages 26 thru 28

④ "H" tolerance across inserts is  $+.015$


⑤ Lubricator standard on HFX G Series

⑥ Delete letter "G" from suffix on HFX G Series to indicate no lubricator  
Example: HFX4

# Commercial Series

## Four Piece - Metal to Metal

ROD  
ENDS

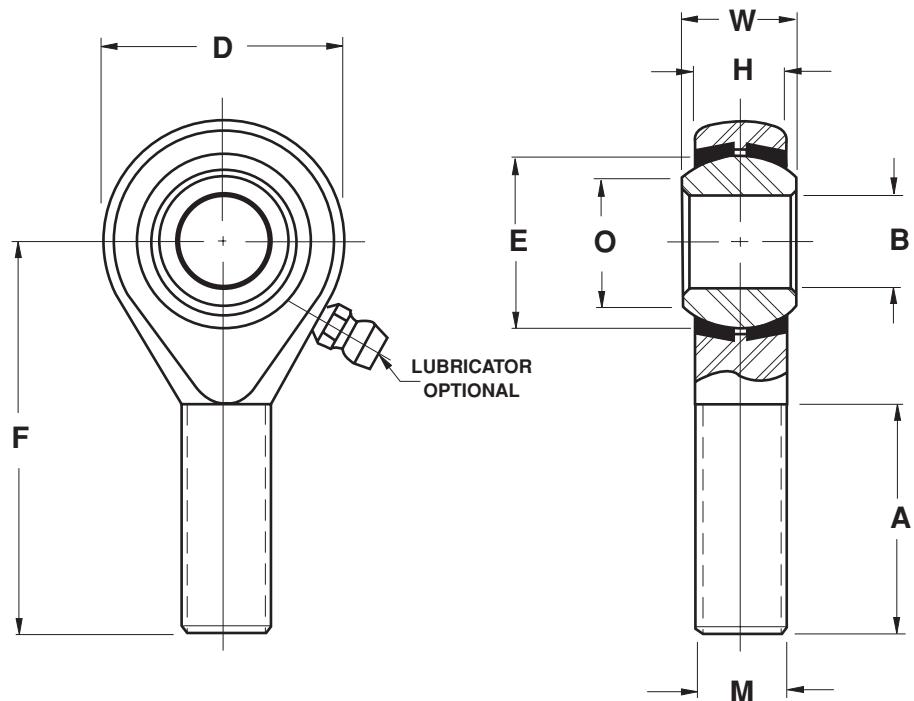

### Series HM C

ROD END NUMBER	DIMENSIONS IN INCHES									MAXIMUM STATIC RADIAL LOAD	APPROX WEIGHT
	BORE	BALL WIDTH	HOUSING WIDTH	HEAD DIAMETER	LENGTH TO CENTER OF BALL	THREAD LENGTH	THREAD SIZE	BALL DIAMETER	BALL FLAT DIAMETER		
	B	W	H	D	F	A	M	E	O		
+ .0025 - .0005	+ .005 - .005	+ .010 - .010	+ .031 - .031	+ .031 - .031	+ .062 - .062	UNF -3A	REF	REF	LBF	LBS	
<b>HM3C</b>	.1900	.312	.250	.625	1.250	.750	.1900 - 32	.437	.306	900	.03
<b>HM4C</b>	.2500	.375	.281	.750	1.562	1.000	.2500 - 28	.515	.353	1,700	.05
<b>HM5C</b>	.3125	.437	.344	.875	1.875	1.250	.3125 - 24	.625	.447	2,500	.08
<b>HM6C</b>	.3750	.500	.406	1.000	1.938	1.250	.3750 - 24	.718	.516	4,000	.12
<b>HM7C</b>	.4375	.562	.437	1.125	2.125	1.375	.4375 - 20	.812	.586	5,000	.17
<b>HM8C</b>	.5000	.625	.500	1.312	2.438	1.500	.5000 - 20	.937	.698	7,000	.25
<b>HM10C</b>	.6250	.750	.562	1.500	2.625	1.625	.6250 - 18	1.125	.839	8,050	.41
<b>HM12C</b>	.7500	.875	.687	1.750	2.875	1.750	.7500 - 16	1.312	.978	11,300	.64

Outer Member: Carbon steel, with protective coating for corrosion resistance

① Add letter "L" to prefix to indicate Left Hand thread

Example: HML4C

Ball: 52100 Alloy steel, heat treated, chrome plated

② For design options, see page 29

Inserts: Brass


③ For Engineering data, see pages 26 thru 28

④ "H" tolerance across inserts is +/- .015

### NOTES

# Commercial Series

## Four Piece - Metal to Metal

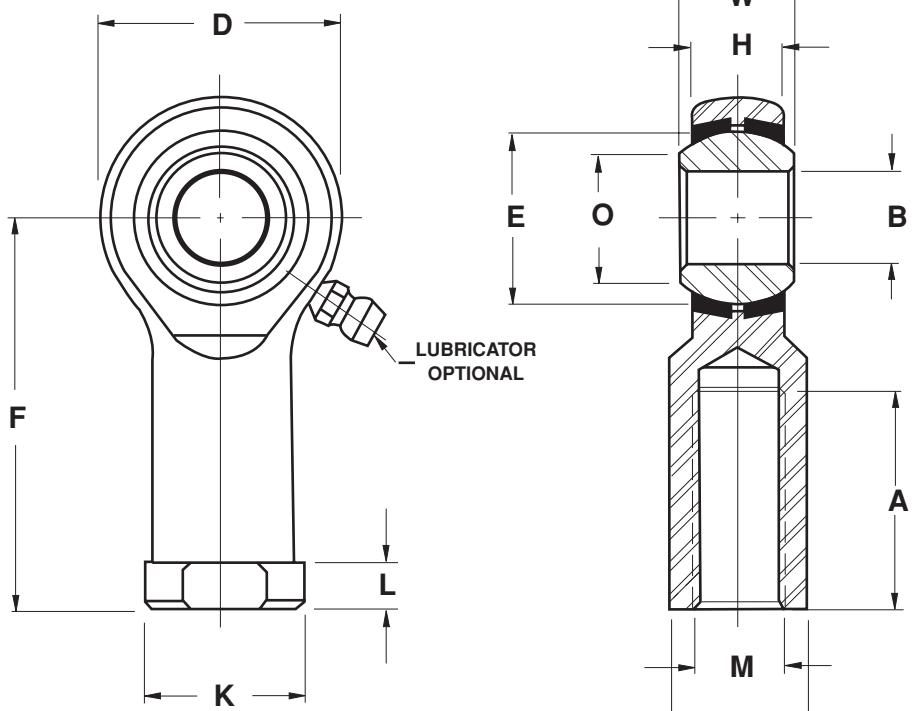

ROD  
ENDS

### Series HF C

ROD END NUMBER	DIMENSIONS IN INCHES												MAXIMUM STATIC RADIAL LOAD	APPROX WEIGHT		
	BORE	BALL WIDTH	HOUSING WIDTH	HEAD DIAMETER	LENGTH TO CENTER OF BALL	THREAD LENGTH	THREAD SIZE	BALL DIAMETER	BALL FLAT DIAMETER	ACROSS WRENCH FLATS	OTHER DIMENSIONS					
	B	W	H	D	F	A	M	E	O	J	K	L				
.0025	+.005	+.010	+.031	+.031	+.062						+.010	+.010	LBF	LBS		
-.0005	-.005	-.010	-.031	-.031	-.062	UNF-3B	REF	REF	-.010	-.010	-.010	-.010				
<b>HF3C</b>	.1900	.375	.281	.750	1.312	.750	.2500-28	.515	.353	.375	.468	.187	2,700	.05		
<b>HF4C</b>	.2500	.437	.344	.875	1.375	.750	.3125-24	.625	.447	.437	.500	.187	3,350	.08		
<b>HF5C</b>	.3125	.500	.406	1.000	1.625	.937	.3750-24	.718	.516	.562	.687	.250	4,450	.12		
<b>HF6C</b>	.3750	.562	.437	1.125	1.812	1.062	.4375-20	.812	.586	.625	.750	.250	5,350	.17		
<b>HF7C</b>	.4375	.625	.500	1.312	2.125	1.187	.5000-20	.937	.698	.750	.875	.250	7,400	.26		
<b>HF8C</b>	.5000	.750	.562	1.500	2.500	1.500	.6250-18	1.125	.839	.875	1.000	.312	8,050	.41		
<b>HF10C</b>	.6250	.875	.687	1.750	2.875	1.750	.7500-16	1.312	.978	1.000	1.125	.312	11,300	.64		
<b>HF12C</b>	.7500	.250	.625	1.062	.562	.1900-32	.437	.306	.312	.406	.187	1,850	.03			

Outer Member: Carbon steel, with protective coating for corrosion resistance

Ball: 52100 Alloy steel, heat treated, chrome plated

Inserts: Brass

#### NOTES

① Add letter "L" to prefix to indicate Left Hand thread

Example: HFL4C


② For design options, see page 29

③ For Engineering data, see pages 26 thru 28

④ "H" tolerance across inserts is +/- .015

# Commercial Extra Capacity Series

## Two Piece - Metal to Metal

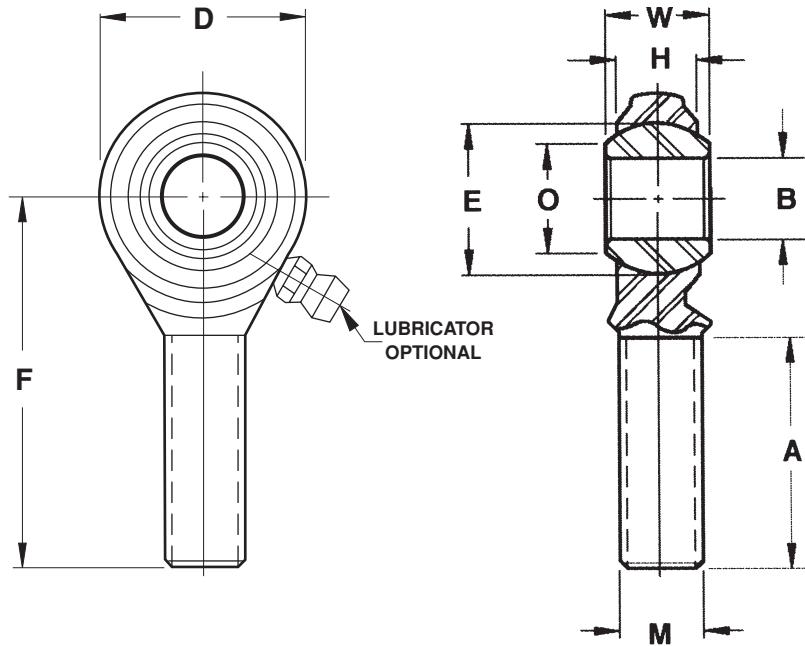

### Series M CR

ROD END NUMBER	DIMENSIONS IN INCHES									MAXIMUM STATIC RADIAL LOAD	APPROX WEIGHT
	BORE	BALL WIDTH	HOUSING WIDTH	HEAD DIAMETER	LENGTH TO CENTER OF BALL	THREAD LENGTH	THREAD SIZE	BALL DIAMETER	BALL FLAT DIAMETER		
	B	W	H	D	F	A	M	E	O		
+ .0025 - .0005	+ .005 - .005	+ .010 - .010	+ .031 - .031	+ .031 - .031	+ .062 - .062	+ .062 - .062	UNF -3A	REF	REF	LBF	LBS
<b>M3CR</b>	.1900	.312	.250	.625	1.250	.750	.1900 - 32	.437	.306	950	.03
<b>M4CR</b>	.2500	.375	.281	.750	1.562	1.000	.2500 - 28	.515	.353	2,000	.05
<b>M5CR</b>	.3125	.437	.344	.875	1.875	1.250	.3125 - 24	.625	.447	3,000	.08
<b>M6CR</b>	.3750	.500	.406	1.000	1.938	1.250	.3750 - 24	.718	.516	5,000	.11
<b>M7CR</b>	.4375	.562	.437	1.125	2.125	1.375	.4375 - 20	.812	.586	6,500	.16
<b>M8CR</b>	.5000	.625	.500	1.312	2.438	1.500	.5000 - 20	.937	.698	9,500	.24
<b>M10CR</b>	.6250	.750	.562	1.500	2.625	1.625	.6250 - 18	1.125	.839	10,000	.40
<b>M12CR</b>	.7500	.875	.687	1.750	2.875	1.750	.7500 - 16	1.312	.978	14,000	.63

*Outer Member:* Carbon steel, with protective coating for corrosion resistance

① Add letter "L" to prefix to indicate Left Hand thread  
Example: ML4CR


*Ball:* 52100 Alloy steel, heat treated, chrome plated

② For design options, see page 29  
③ For Engineering data, see pages 26 thru 28

NOTES

# Commercial Extra Capacity Series

## Two Piece - Metal to Metal

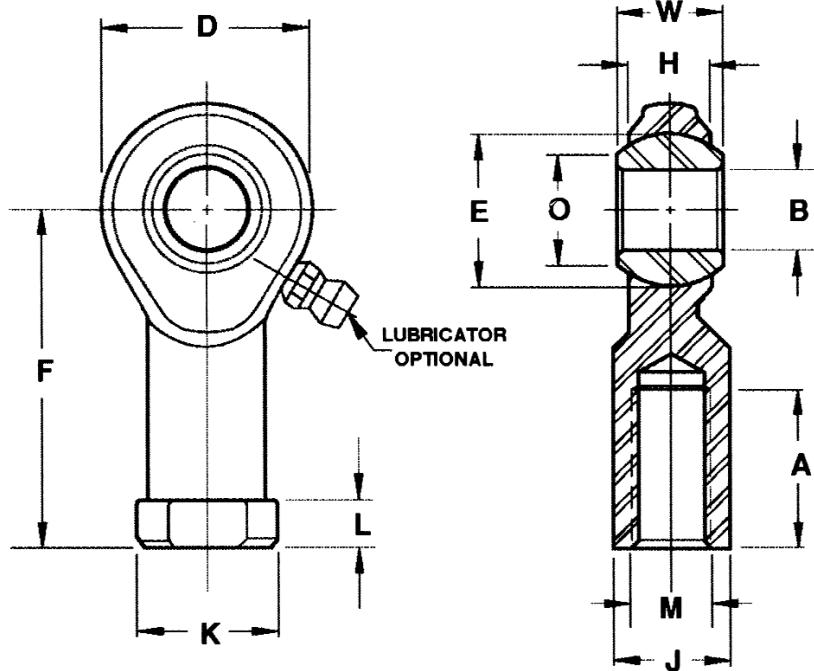

### Series F CR

ROD END NUMBER	DIMENSIONS IN INCHES										OTHER DIMENSIONS		MAXIMUM STATIC RADIAL LOAD	APPROX WEIGHT
	BORE	BALL WIDTH	HOUSING WIDTH	HEAD DIAMETER	LENGTH TO CENTER OF BALL	THREAD LENGTH	THREAD SIZE	BALL DIAMETER	BALL FLAT DIAMETER	ACROSS WRENCH FLATS				
	B	W	H	D	F	A	M	E	O	J	K	L		
	+.0025 -.0005	+.005 -.005	.010			+.062 -.062	UNF-3B	REF	REF	REF	REF	REF	LBF	LBS
<b>F3CR</b>	.1900	.312	.250	.625	1.062	.562	.1900-32	.437	.306	.312	.406	.187	2,000	.03
<b>F4CR</b>	.2500	.375	.281	.750	1.312	.750	.2500-28	.515	.353	.375	.468	.187	3,200	.05
<b>F5CR</b>	.3125	.437	.344	.875	1.375	.750	.3125-24	.625	.447	.437	.500	.187	3,800	.08
<b>F6CR</b>	.3750	.500	.406	1.000	1.625	.937	.3750-24	.718	.516	.562	.687	.250	5,000	.12
<b>F7CR</b>	.4375	.562	.437	1.125	1.812	1.062	.4375-20	.812	.586	.625	.750	.250	6,500	.17
<b>F8CR</b>	.5000	.625	.500	1.312	2.125	1.187	.5000-20	.937	.698	.750	.875	.250	9,500	.26
<b>F10CR</b>	.6250	.750	.562	1.500	2.500	1.500	.6250-18	1.125	.839	.875	1.000	.312	10,000	.41
<b>F12CR</b>	.7500	.875	.687	1.750	2.875	1.750	.7500-16	1.312	.978	1.000	1.125	.312	14,000	.64

**Outer Member:** Carbon steel, with protective coating for corrosion resistance.

① Add letter "L" to prefix to indicate Left Hand thread  
Example: FL4CR

**Ball:** 52100 Alloy steel, heat treated, chrome plated

- ② For design options, see page 29
- ③ For Engineering data, see pages 26 thru 28

NOTES



## HEIM "D" Self Lubricating Series

For commercial applications where a self-lubricating bearing is either desirable or necessary, Heim developed Heim "D" Series bearings. Heim "D" bearings are designed with an engineered thermoplastic race material and offer a lower coefficient of friction than metal-to-metal types that use conventional lubricants. It is a resilient material that performs well under vibratory and dynamic loading and withstands dynamic loads up to 3500 PSI.

## Where to Use HEIM "D" Bearings


Heim "D" bearings should be used in applications where the bearing cannot be periodically lubricated or where it is desirable to eliminate the need for regular maintenance. They are also recommended for applications where there is considerable vibration. The resilience of the engineered thermoplastic race

absorbs vibration without causing fretting or galling of the surface. The torque level of the bearing will be low because of the low coefficient of friction of the hardened steel ball on the engineered thermoplastic race. The coefficient of friction for Heim "D" bearings is approximately 0.1, but will vary somewhat depending on the loads, speeds, temperatures, and solvents that are present. The chart on this page shows a typical bearing wear pattern of Heim "D" bearings and how they vary with number of oscillations.

## Environmental Characteristics

Heim "D" bearings have good environmental tolerances. They offer advantages over bearings that use a nylon race because the Heim engineered thermoplastic race absorbs very little moisture. It is generally resistant to alcohols, aldehydes, esters, ethers, hydrocarbons, weak acids and bases, water and agricultural chemicals. Dimensional stability is quite good when exposed to these substances, however the Heim engineering department should be contacted for recommendations on specific performance characteristics.


## Wear vs. Oscillations

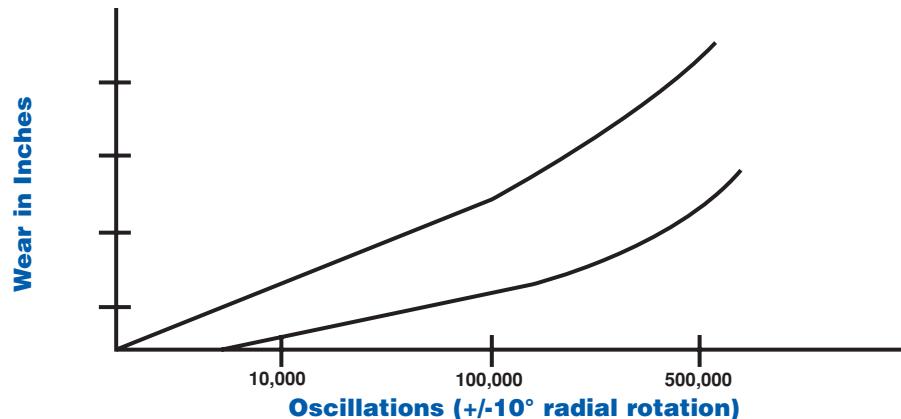

This chart shows typical wear of engineered thermoplastic race bearings (load at one-half static rating - ball surface velocity as noted),

# Commercial Series

## Self-Lubricating

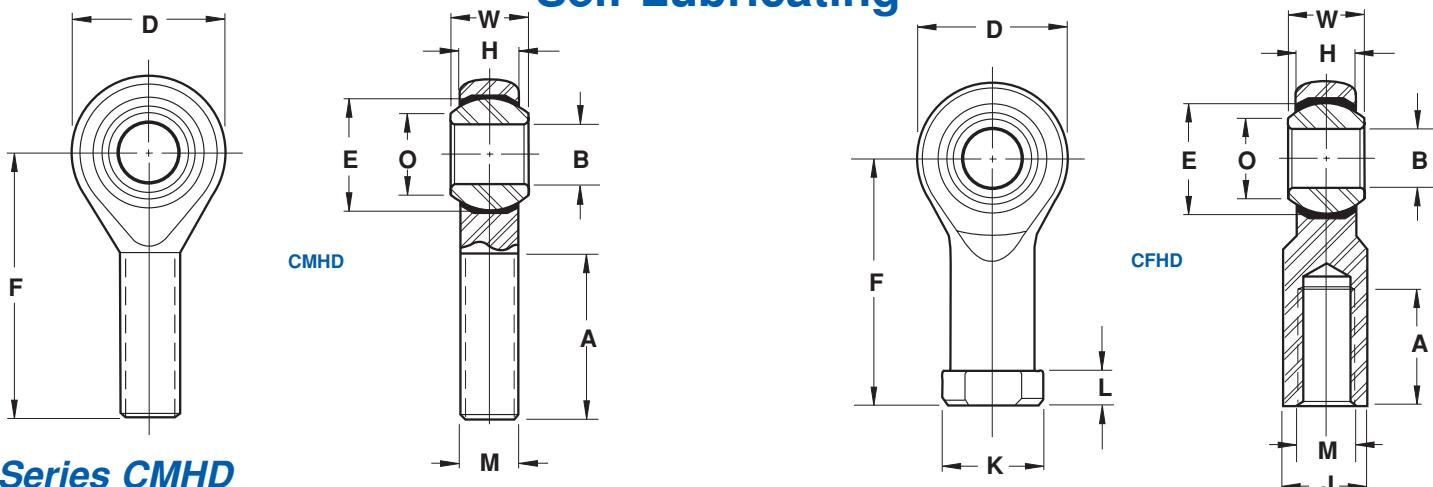

### Series CMHD

ROD END NUMBER	DIMENSIONS IN INCHES										MAXIMUM STATIC RADIAL LOAD	APPROX WEIGHT
	BORE	BALL WIDTH	HOUSING WIDTH	HEAD DIAMETER	LENGTH TO CENTER OF BALL	THREAD LENGTH	THREAD SIZE	BALL FLAT DIAMETER	O			
	<b>B</b> +.0025 -.0005	<b>W</b> .005 -.005	<b>H</b> .010 -.010	<b>D</b> REF	<b>F</b> REF	<b>A</b> .062 -.062	<b>M</b> UNF-3A	<b>E</b> REF	<b>O</b> REF	LBF	LBS	
<b>CMHD3</b>	.1900	.312	.250	.625	1.250	.750	.1900-32	.437	.306			
<b>CMHD4</b>	.2500	.375	.281	.750	1.562	1.000	.2500-28	.515	.353	800	.03	
<b>CMHD5</b>	.3125	.437	.344	.875	1.875	1.250	.3125-24	.625	.447	1,060	.05	
<b>CMHD6</b>	.3750	.500	.406	1.000	1.938	1.250	.3750-24	.718	.516	1,575	.08	
<b>CMHD7</b>	.4375	.562	.437	1.125	2.125	1.375	.4375-20	.812	.586	2,150	.12	
<b>CMHD8</b>	.5000	.625	.500	1.312	2.438	1.500	.5000-20	.937	.698	2,600	.17	
<b>CMHD10</b>	.6250	.750	.562	1.500	2.625	1.625	.6250-18	1.125	.839	3,425	.26	
<b>CMHD12</b>	.7500	.875	.687	1.750	2.875	1.750	.7500-16	1.312	.978	4,625	.41	

Outer Member: Carbon steel, with protective coating for corrosion resistance

Ball: 52100 Alloy steel, heat treated, chrome plated

Race: Engineered thermoplastic

### NOTES

- ① Add letter "L" to prefix to indicate Left Hand thread.  
Example: CMHDL4
- ② For design options, see page 29
- ③ For Engineering data, see pages 12, 26 thru 28
- ④ This series is also available with 300 Series Stainless Steel outer member and ball. Part number is CMSD. Contact factory for availability.

### Series CFHD

ROD END NUMBER	DIMENSIONS IN INCHES												MAXIMUM STATIC RADIAL LOAD	APPROX WEIGHT
	BORE	BALL WIDTH	HOUSING WIDTH	HEAD DIAMETER	LENGTH TO CENTER OF BALL	THREAD LENGTH	THREAD SIZE	BALL DIAMETER	BALL FLAT DIAMETER	ACROSS WRENCH FLATS	OTHER DIMENSIONS			
	<b>B</b> +.0025 -.0005	<b>W</b> .005 -.005	<b>H</b> .010 -.010	<b>D</b> REF	<b>F</b> REF	<b>A</b> .062 -.062	<b>M</b> UNF-3B	<b>E</b> REF	<b>O</b> REF	<b>J</b> REF	<b>K</b> REF	<b>L</b> REF	LBF	LBS
<b>CFHD3</b>	.1900	.312	.250	.625	1.062	.562	.1900 - 32	.437	.306	.312	.406	.187	800	.03
<b>CFHD4</b>	.2500	.375	.281	.750	1.312	.750	.2500 - 28	.515	.355	.375	.468	.187	1,060	.05
<b>CFHD5</b>	.3125	.437	.344	.875	1.375	.750	.3125 - 24	.625	.447	.437	.500	.187	1,575	.08
<b>CFHD6</b>	.3750	.500	.406	1.000	1.625	.937	.3750 - 24	.718	.517	.562	.687	.250	2,150	.12
<b>CFHD7</b>	.4375	.562	.437	1.125	1.812	1.062	.4375 - 20	.812	.586	.625	.750	.250	2,600	.17
<b>CFHD8</b>	.5000	.625	.500	1.312	2.125	1.187	.5000 - 20	.937	.698	.750	.875	.250	3,425	.26
<b>CFHD10</b>	.6250	.750	.562	1.500	2.500	1.500	.6250 - 18	1.125	.839	.875	1.000	.312	4,625	.41
<b>CFHD12</b>	.7500	.875	.687	1.750	2.875	1.750	.7500 - 16	1.312	.978	1.000	1.125	.312	6,600	.64

Outer Member: Carbon steel, with protective coating for corrosion resistance

Ball: 52100 Alloy steel, heat treated, chrome plated

Race: Engineered thermoplastic

① Add letter "L" to prefix to indicate Left Hand thread.

Example: CFHDL4

② For design options, see page 29


③ For Engineering data, see pages 12, 26 thru 28

④ This series is also available with 300 Series Stainless Steel outer member and ball. Part number is CFSD. Contact factory for availability.

### NOTES

# Precision Aircraft Series

## Four Piece - Metal to Metal

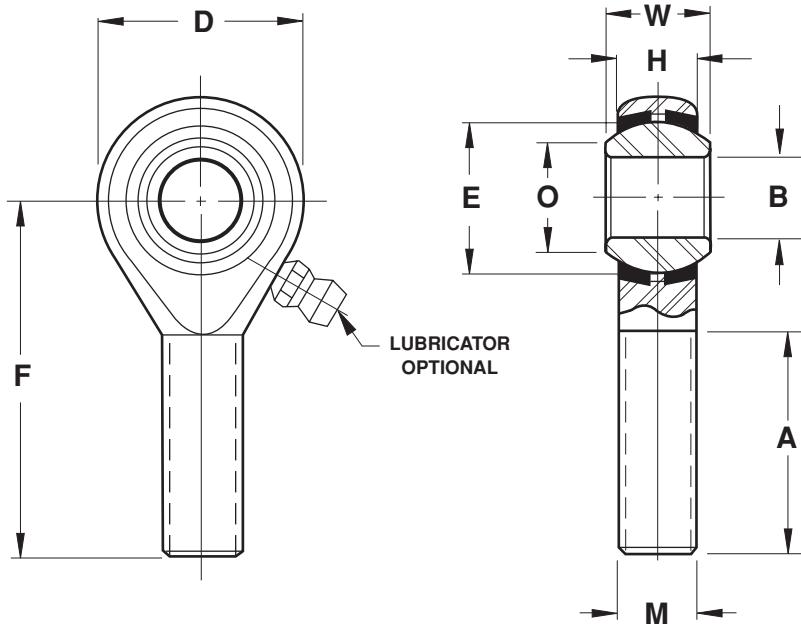

### Series HM M

ROD END NUMBER	DIMENSIONS IN INCHES									MAXIMUM STATIC RADIAL LOAD <sup>⑦</sup>	APPROX WEIGHT
	BORE	BALL WIDTH	HOUSING WIDTH	HEAD DIAMETER	LENGTH TO CENTER OF BALL	THREAD LENGTH	THREAD SIZE	BALL DIAMETER	BALL FLAT DIAMETER		
	B	W	H	D	F	A	M	E	O		
+ .0015	+ .000	+ .005	+ .010	.010	.031	.062				LBF	LBS
- .0005	- .005	- .005	.010	.031							
<b>HM2M</b>	.1250	.250	.187	.469	.937	.500	.1380-32UNC	.312	.187	450	.02
<b>HM2AM</b>	.1562	.281	.219	.562	1.125	.625	.1640-32UNC	.375	.248	650	.02
<b>HM3M</b>	.1900	.312	.250	.625	1.250	.750	.1900-32UNF	.437	.306	900	.03
<b>HM4M</b>	.2500	.375	.281	.750	1.562	1.000	.2500-28UNF	.515	.353	1,700	.05
<b>HM5M</b>	.3125	.437	.344	.875	1.875	1.250	.3125-24UNF	.625	.447	2,500	.08
<b>HM6M</b>	.3750	.500	.406	1.000	1.938	1.250	.3750-24UNF	.718	.516	4,000	.12
<b>HM7M</b>	.4375	.562	.437	1.125	2.125	1.375	.4375-20UNF	.812	.586	5,000	.17
<b>HM8M</b>	.5000	.625	.500	1.312	2.438	1.500	.5000-20UNF	.937	.698	7,000	.26
<b>HM10M</b>	.6250	.750	.562	1.500	2.625	1.625	.6250-18UNF	1.125	.839	8,050	.41
<b>HM12M</b>	.7500	.875	.687	1.750	2.875	1.750	.7500-16UNF	1.312	.978	11,300	.64
<b>HM16M</b> ⑥	1.0000	1.375	1.000 ⑤	2.750 ⑤	4.125	2.125	1.2500-12UNF	1.875	1.275	28,400	2.25

**Outer Member:** Aircraft quality carbon steel, magnetic particle inspected, with protective coating for corrosion resistance

#### NOTES

① Add letter "L" to prefix to indicate Left Hand thread  
Example: HML4M

② For design options, see page 29  
③ For Engineering data, see pages 26 thru 28


④ "H" tolerance across inserts is +/- .015

⑤ Tolerances for 16 size: "D" +.030  
-.010  
"H" +.030  
-.010

⑥ Outer Member: Alloy steel  
Inserts: One piece carbon steel race  
⑦ Load ratings reflect loads without lubricator.  
For loads with lubricator contact Heim Engineering.

# Precision Aircraft Series

## Four Piece - Metal to Metal

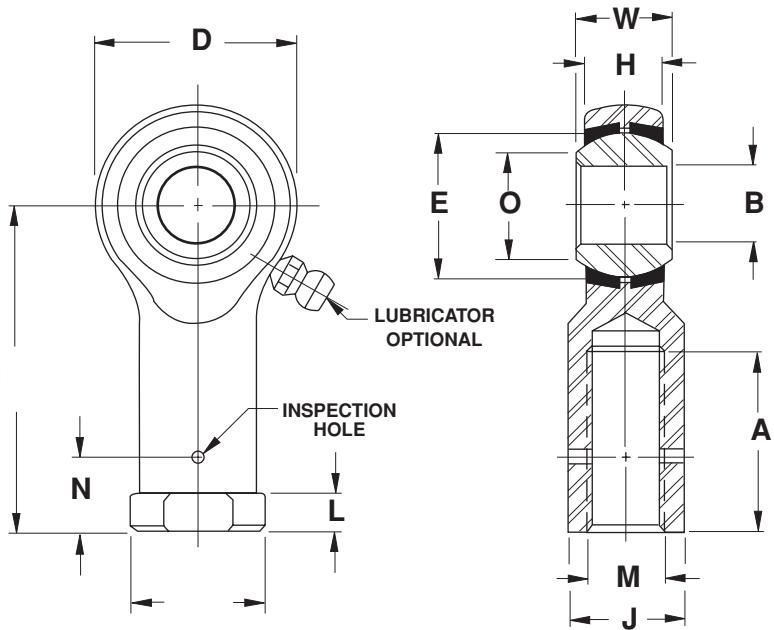

ROD  
ENDS

### Series HF M

ROD END NUMBER	DIMENSIONS IN INCHES													MAXIMUM STATIC RADIAL LOAD	APPROX WEIGHT			
	BORE	BALL WIDTH	HOUSING WIDTH	HEAD DIAMETER	LENGTH TO CENTER OF BALL	THREAD LENGTH	THREAD SIZE	BALL DIAMETER	BALL FLAT DIAMETER	ACROSS WRENCH FLATS	OTHER DIMENSIONS							
	B	W	H	D	F	A	M	E	O	J	K	N	L					
.0015	+.000	+.005	+.010	+.031	+.062						+.010	+.020	+.010					
.0005	-.005	-.005	-.010	-.031	-.031		CLASS -3B	REF	REF		-.010	-.020	-.010	LBF	LBS			
<b>HF2M</b>	.1250	.250	.187	.469	.812	.375	.1380-32UNC	.312	.187	.250	.312	.250	.187	1,200	.02			
<b>HF2AM</b>	.1562	.281	.219	.562	.875	.375	.1640-32UNC	.375	.248	.281	.344	.250	.187	1,700	.02			
<b>HF3M</b>	.1900	.312	.250	.625	1.062	.562	.1900-32UNF	.437	.306	.312	.406	.312	.187	1,850	.03			
<b>HF4M</b>	.2500	.375	.281	.750	1.312	.750	.2500-28UNF	.515	.353	.375	.468	.312	.187	2,700	.05			
<b>HF5M</b>	.3125	.437	.344	.875	1.375	.750	.3125-24UNF	.625	.447	.437	.500	.406	.187	3,350	.08			
<b>HF6M</b>	.3750	.500	.406	1.000	1.625	.937	.3750-24UNF	.718	.516	.562	.687	.469	.250	4,450	.12			
<b>HF7M</b>	.4375	.562	.437	1.125	1.812	1.062	.4375-20UNF	.812	.586	.625	.750	.531	.250	5,350	.17			
<b>HF8M</b>	.5000	.625	.500	1.312	2.125	1.187	.5000-20UNF	.937	.698	.750	.875	.594	.250	7,400	.26			
<b>HF10M</b>	.6250	.750	.562	1.500	2.500	1.500	.6250-18UNF	1.125	.839	.875	1.000	.750	.312	8,050	.41			
<b>HF12M</b>	.7500	.875	.687	1.750	2.875	1.750	.7500-16UNF	1.312	.978	1.000	1.125	.875	.312	11,300	.64			
<b>HF16M</b> ①	1.0000	1.375	1.000 ②	2.750 ③	4.125	2.125	1.2500-12UNF	1.875	1.275	1.500 ④	1.625 ⑤	1.000	.437 ⑥	28,400	2.25			

**Outer Member:** Aircraft quality carbon steel, magnetic particle inspected,  
with protective coating for corrosion resistance

#### NOTES

① Add letter "L" to prefix to indicate Left Hand thread  
Example: HFL4M

② For design options, see page 29

③ For Engineering data, see pages 26 thru 28

④ "H" tolerance across inserts is +/- .015

⑤ Tolerances for 16 size: "D" +.030

- .010

"H" +.030

- .010

"K", "J", "L" +/- .015


⑥ Outer Member: Alloy steel

Inserts: One piece carbon steel race

⑦ Load ratings reflect loads without lubricator.  
For loads with lubricator contact Heim  
Engineering.

# Precision Special Purpose Aircraft Series

## Four Piece - Metal to Metal

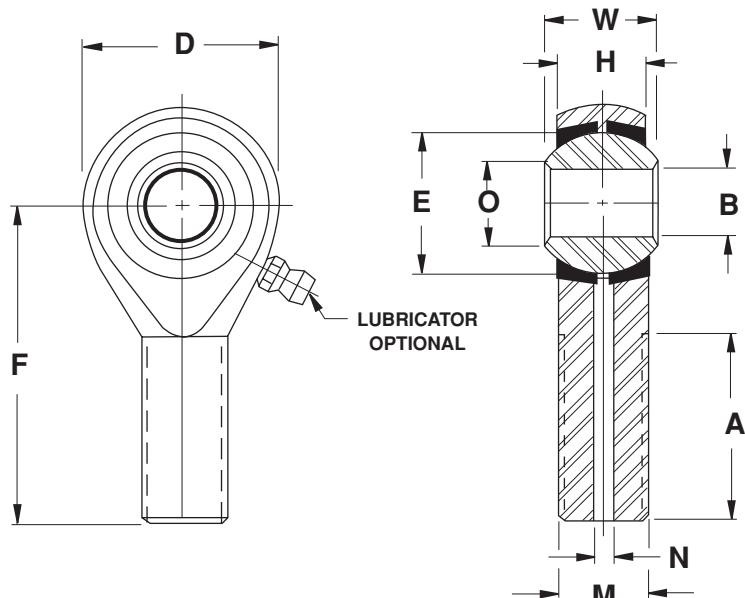

### Series MM

ROD END NUMBER	DIMENSIONS IN INCHES										MAXIMUM STATIC RADIAL LOAD	APPROX WEIGHT
	BORE	BALL WIDTH	HOUSING WIDTH	HEAD DIAMETER	LENGTH TO CENTER OF BALL	THREAD LENGTH	THREAD SIZE	BALL DIAMETER	BALL FLAT DIAMETER	DRILL DIAMETER		
	B	W	H	D	F	A	M	E	O	N		
+.0015 -.0005	+.000 -.005	+.005 -.005	+.010 -.010	+.031 -.031	+.062 -.031	UNF -3A	REF	REF	REF	LBF	LBS	
<b>M3414M</b>	.1900	.437	.328	.750	1.560	1.000	.2500-28	.515	.273	-	1,700	.05
<b>MD3514M</b>	.1900	.437	.328	.875	1.375	.750	.3125-24	.515	.273	.113	2,150	.07
<b>MD3614M</b>	.1900	.437	.328	.750	1.375	.750	.3750-24	.515	.273	.113	2,850	.07
<b>MD3616M</b>	.1900	.500	.375	.812	1.812	1.062	.3750-24	.593	.321	.136	2,750	.08
<b>M4414M</b>	.2500	.437	.304	.812	1.562	1.000	.2500-28	.562	.354	-	1,700	.06
<b>MD4615M</b>	.2500	.484	.335	.875	2.312	1.500	.3750-24	.625	.395	.136	3,150	.10
<b>MD4616M</b>	.2500	.500	.335	.875	2.062	1.500	.3750-24	.625	.375	.159	2,750	.09

**Outer Member:** Aircraft quality carbon steel, magnetic particle inspected, with protective coating for corrosion resistance

#### NOTES


- ① Add letter "L" to prefix to indicate Left Hand thread  
Example: ML3414M
- ② For design options, see page 29
- ③ For Engineering data, see pages 26 thru 28
- ④ "H" tolerance across inserts is +/- .015

**Ball:** 52100 Alloy steel, heat treated, chrome plated

**Inserts:** Brass

# Precision Special Purpose Aircraft Series

## Four Piece - Metal to Metal

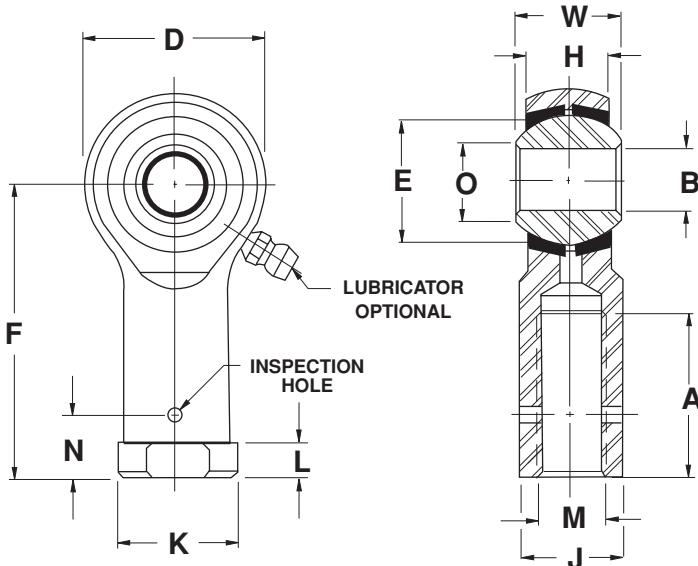

ROD  
ENDS

### Series FM

ROD END NUMBER	DIMENSIONS IN INCHES													MAXIMUM STATIC RADIAL LOAD	APPROX WEIGHT		
	BORE	BALL WIDTH	HOUSING WIDTH	HEAD DIAMETER	LENGTH TO CENTER OF BALL	THREAD LENGTH	THREAD SIZE	BALL DIAMETER	BALL FLAT DIAMETER	ACROSS WRENCH FLATS	OTHER DIMENSIONS						
	B	W	H	D	F	A	M	E	O	J	K	N	L				
+.0015 -.0005	+.000 -.005	+.005 -.005	+.010 -.010	+.031 -.031	+.062 -.031	REF	REF	+.010 -.010	+.010 -.020	+.010 -.010	LBF	LBS					
<b>F3414M</b>	.1900	.437	.328	.750	1.375	.750	.2500-28	.515	.273	.375	.468	.312	.187	2,850	.06		
<b>F34714M</b>	.1900	.437	.328	.750	1.062	.437	.2500-28	.515	.273	.375	.375	-	-	2,850	.05		
<b>F3416M</b>	.1900	.500	.375	.812	1.375	.750	.2500-28	.593	.321	.375	.468	.312	.187	2,750	.08		
<b>F3514M</b>	.1900	.437	.328	.750	1.375	.750	.3125-24	.515	.273	.438	.500	.406	.187	2,850	.07		
<b>F4414M</b>	.2500	.437	.304	.812	1.375	.750	.2500-28	.562	.354	.375	.468	.312	.187	2,950	.07		
<b>F4519M</b>	.2500	.593	.438	.938	1.469	.750	.3125-24	.687	.347	.438	.500	.406	.187	3,700	.11		

**Outer Member:** Aircraft quality carbon steel, magnetic particle inspected,  
with protective coating for corrosion resistance

#### NOTES



- ① Add letter "L" to prefix to indicate Left Hand thread  
Example: FL3414M
- ② For design options, see page 29
- ③ For Engineering data, see pages 26 thru 28
- ④ "H" tolerance across inserts is +/- .015

**Ball:** 52100 Alloy steel, heat treated, chrome plated

**Inserts:** Brass

# Precision Aircraft Series

## Self-Lubricating

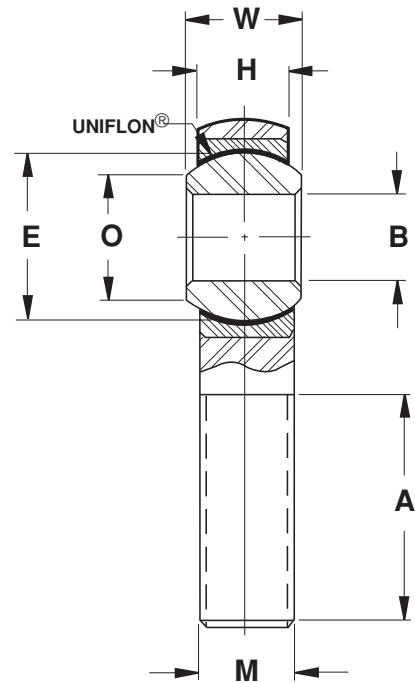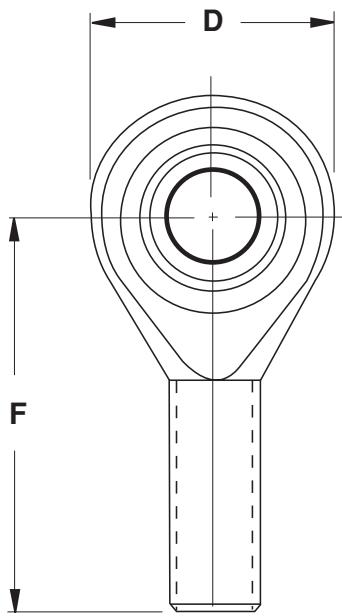

### Series HME M

ROD END NUMBER	DIMENSIONS IN INCHES									MAXIMUM STATIC RADIAL LOAD	APPROX WEIGHT
	BORE	BALL WIDTH	HOUSING WIDTH	HEAD DIAMETER	LENGTH TO CENTER OF BALL	THREAD LENGTH	THREAD SIZE	BALL DIAMETER	BALL FLAT DIAMETER		
	<b>B</b>	<b>W</b>	<b>H</b>	<b>D</b>	<b>F</b>	<b>A</b>	<b>M</b>	<b>E</b>	<b>O</b>		
<b>HME3M</b>	.1900	.312	.250	.625	1.250	.750	.1900-32	.437	.306	865	.03
<b>HME4M</b>	.2500	.375	.281	.750	1.562	1.000	.2500-28	.515	.353	1,550	.05
<b>HME5M</b>	.3125	.437	.344	.875	1.875	1.250	.3125-24	.625	.447	2,080	.08
<b>HME6M</b>	.3750	.500	.406	1.000	1.938	1.250	.3750-24	.718	.516	2,950	.12
<b>HME7M</b>	.4375	.562	.437	1.125	2.125	1.375	.4375-20	.812	.586	3,160	.17
<b>HME8M</b>	.5000	.625	.500	1.312	2.438	1.500	.5000-20	.937	.698	4,925	.26
<b>HME10M</b>	.6250	.750	.562	1.500	2.625	1.625	.6250-18	1.125	.839	5,465	.41
<b>HME12M</b>	.7500	.875	.687	1.750	2.875	1.750	.7500-16	1.312	.978	8,300	.64
<b>HME16M</b>	1.0000	1.375	1.000 ①	2.750 ①	4.125	2.125	1.2500-12	1.875	1.275	28,400	2.25

**Outer Member:** Aircraft quality carbon steel, magnetic particle inspected, with protective coating for corrosion resistance

#### NOTES

① Add letter "L" to prefix to indicate Left Hand thread  
Example: HMLE4M

② For design options, see page 29

③ For Engineering data, see pages 26 thru 28, 52

④ Tolerances for 16 size: "D" +.030  
"W" +.030  
"H" -.010  
"E" -.010


**Ball:** 52100 Alloy steel, heat treated, chrome plated

**Race:** Aluminum

**Liner:** Self-lubricating UNIFLON®

# Precision Aircraft Series

## Self-Lubricating

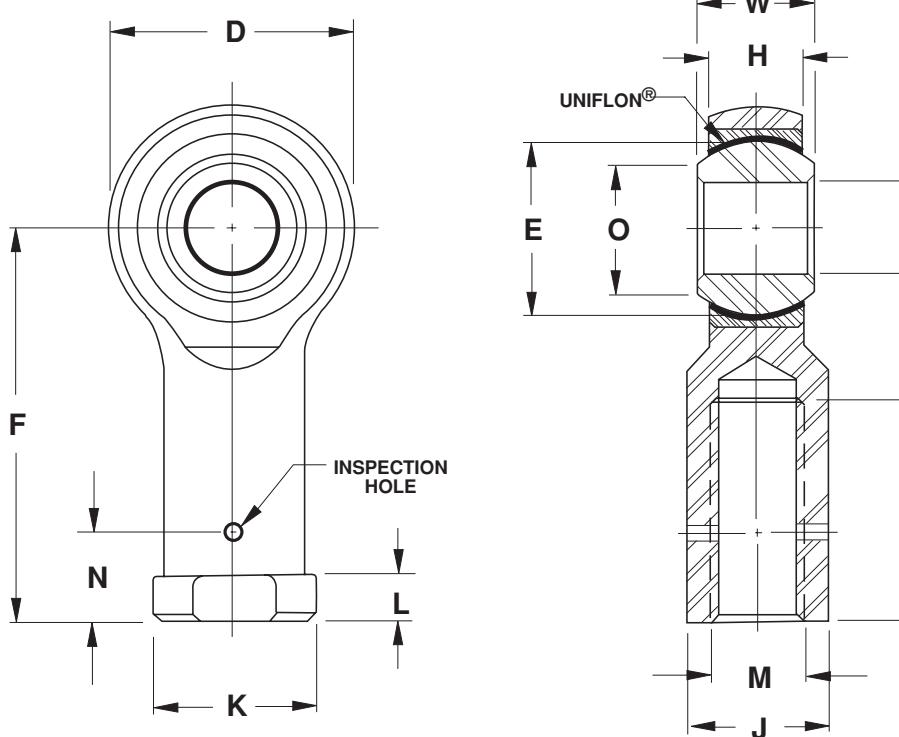

### Series HFE M

ROD END NUMBER	DIMENSIONS IN INCHES												MAXIMUM STATIC RADIAL LOAD LBF	APPROX WEIGHT LBS		
	BORE	BALL WIDTH	HOUSING WIDTH	HEAD DIAMETER	LENGTH TO CENTER OF BALL	THREAD LENGTH	THREAD SIZE	BALL DIAMETER	BALL FLAT DIAMETER	ACROSS WRENCH FLATS	OTHER DIMENSIONS					
	B	W	H	D	F	A	M	E	O	J	K	N	L			
+	.0015	+.000	+.005	+.010	+.010	+.062	UNF-3B	REF	REF	+.010	+.010	+.020	+.010			
-	.0005	-.005	-.005	-.010	-.010	-.031			-.010	-.010	-.010	-.020	-.010			
<b>HFE3M</b>	.1900	.312	.250	.625	1.062	.562	.1900-32	.437	.306	.312	.406	.312	.187	865	.03	
<b>HFE4M</b>	.2500	.375	.281	.750	1.312	.750	.2500-28	.515	.353	.375	.468	.312	.187	1,550	.05	
<b>HFE5M</b>	.3125	.437	.344	.875	1.375	.750	.3125-24	.625	.447	.437	.500	.406	.187	2,080	.08	
<b>HFE6M</b>	.3750	.500	.406	1.000	1.625	.937	.3750-24	.718	.516	.562	.687	.469	.250	2,950	.12	
<b>HFE7M</b>	.4375	.562	.437	1.125	1.812	1.062	.4375-20	.812	.586	.625	.750	.531	.250	3,160	.17	
<b>HFE8M</b>	.5000	.625	.500	1.312	2.125	1.187	.5000-20	.937	.698	.750	.875	.594	.250	4,925	.26	
<b>HFE10M</b>	.6250	.750	.562	1.500	2.500	1.500	.6250-18	1.125	.839	.875	1.000	.750	.312	5,465	.41	
<b>HFE12M</b>	.7500	.875	.687	1.750	2.875	1.750	.7500-16	1.312	.978	1.000	1.125	.875	.312	8,300	.64	
<b>HFE16M</b>	1.0000	1.375	1.000①	2.750①	4.125	2.125	1.2500-12	1.875	1.275	1.500①	1.625①	1.000	.437①	28,400	2.25	

**Outer Member:** Aircraft quality carbon steel, magnetic particle inspected, with protective coating for corrosion resistance

#### NOTES

① Add letter "L" to prefix to indicate Left Hand thread  
Example: HFLE4M

② For design options, see page 29

③ For Engineering data, see pages 26 thru 28, 52

④ Tolerances for 16 size: "D" +.030

- .010

"H" +.030

- .010

"K", "J", "L" +.015

- .015

**Ball:** 52100 Alloy steel, heat treated, chrome plated

**Race:** Aluminum

**Liner:** Self-lubricating UNIFLON®

# Military Series

## (M81935/1)

### Self-Lubricating



#### Series ME

HEIM PART NUMBER	M81935/1 DASH NO	DIMENSIONS IN INCHES									
		BORE	BALL WIDTH	HOUSING WIDTH	HEAD DIAMETER	LENGTH TO CENTER OF BALL	THREAD LENGTH	THREAD SIZE	BALL DIAMETER	BALL FLAT DIAMETER	
		B	W	H	D	F	A	M	E	O	
		.0000 -.0005	+.000 -.002	+.005 -.005	+.010 -.010	+.010 -.010	+.031 -.031	UNJF-3A	REF	MIN	
<b>ME3</b>	3	.1900	.437	.337	.806	1.562	.968	.3125-24	.531	.300	
<b>ME4</b>	4	.2500	.437	.337	.806	1.562	.968	.3125-24	.531	.300	
<b>ME5</b>	5	.3125	.437	.327	.900	1.875	1.187	.3125-24	.593	.360	
<b>ME6</b>	6	.3750	.500	.416	1.025	1.938	1.187	.3750-24	.687	.470	
<b>ME7</b>	7	.4375	.562	.452	1.150	2.125	1.281	.4375-20	.781	.540	
<b>ME8</b>	8	.5000	.625	.515	1.337	2.438	1.468	.5000-20	.875	.610	
<b>ME10</b>	10	.6250	.750	.577	1.525	2.625	1.562	.6250-18	1.062	.750	
<b>ME12</b>	12	.7500	.875	.640	1.775	2.875	1.687	.7500-16	1.250	.850	
<b>ME14</b>	14	.8750	.875	.765	2.025	3.375	2.000	.8750-14	1.375	1.000	
<b>ME16</b>	16	1.0000	1.375	1.015	2.775	4.125	2.343	1.2500-12	1.875	1.270	

Outer Member: 4340 Alloy steel, heat treated, magnetic particle inspected, cadmium plated and chromate treated

Ball: 440C heat treated


Race: 17-4PH heat treated

Liner: Self-lubricating "E" UNIFLON® per SAE-AS81820 (formerly MIL-B-81820)

# Military Series

(M81935/1)

Self-Lubricating

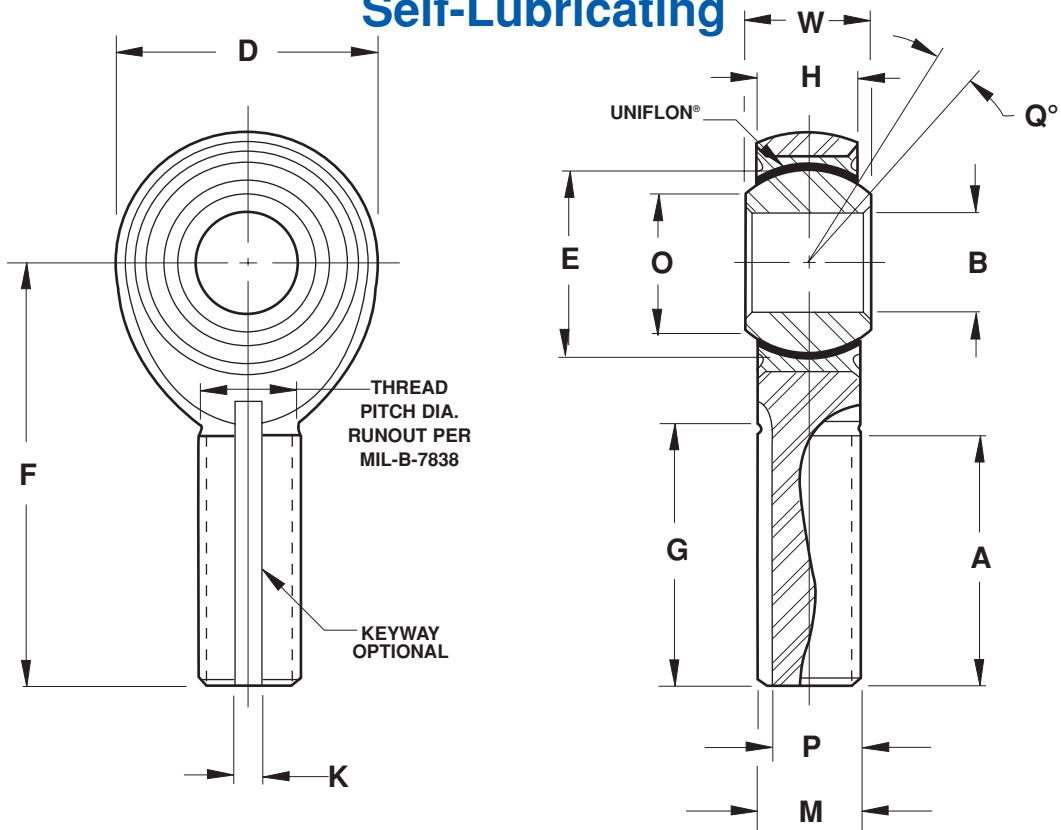

ROD  
ENDS

	KEYWAY		KEYWAY FLAT G	MISALIGNMENT ANGLE	ULTIMATE STATIC RADIAL LOAD	FATIGUE LOAD	AXIAL PROOF LOAD	APPROX WEIGHT	NO LOAD ROTATIONAL BREAKAWAY TORQUE INCH - POUNDS	
	K	P							MIN	MAX
	.062	.268	.980	15	2,360	1,470 ⑤	1,000	.072	0.5	6
	.062	.268	.980	15	4,860	2,380	1,000	.072	0.5	6
	.062	.268	1.270	14	7,180	2,770 ⑥	1,100	.087	1	15
	.093	.319	1.235	8	8,550	3,570	1,660	.136	1	15
	.093	.383	1.402	10	12,000	4,800	1,850	.183	1	15
	.093	.445	1.589	9	19,500	7,680 ⑥	2,040	.278	1	15
	.125	.541	1.683	12	21,900	9,180	2,430	.424	1	15
	.125	.663	1.808	13	29,300	11,600	2,810	.639	1	15
	.156	.777	2.121	6	34,500	13,100	3,320	.963	1	24
	.187	1.136	2.464	12	80,300	30,400	4,340	2.546	1	24

NOTES

① Add letter "L" to prefix to indicate Left Hand thread.

Example: MEL4

② Add letter "K" to prefix to indicate Keyway

Example: MEK4

③ For liner specification, see page 52

④ HEIM is qualified to supply this part and all variations per SAE-AS81935  
(formerly MIL-B-81935)

⑤ Based on bolt bending fatigue strength 180,000 PSI

⑥ Shank limitation

# Military Series

## (M81935/2)

### Self-Lubricating



#### Series FE

HEIM PART NUMBER	M81935/2 DASH NO	DIMENSIONS IN INCHES									
		BORE	BALL WIDTH	HOUSING WIDTH	HEAD DIAMETER	LENGTH TO CENTER OF BALL	THREAD LENGTH	THREAD SIZE	BALL DIAMETER	BALL FLAT DIAMETER	
		B	W	H	D	F	A	M	E	O	
		.+0000 -.0005	.+.000 -.002	.+.005 -.005	.+.010 -.010	.+.010 -.010	.+.031 -.031	UNJF-3B	REF	MIN	
<b>FE3</b>	3	.1900	.437	.337	.806	1.375	.750	.3125-24	.531	.300	
<b>FE4</b>	4	.2500	.437	.337	.806	1.469	.750	.3125-24	.531	.300	
<b>FE5</b>	5	.3125	.437	.327	.900	1.625	.875	.3750-24	.593	.360	
<b>FE6</b>	6	.3750	.500	.416	1.025	1.812	1.000	.3750-24	.687	.470	
<b>FE7</b>	7	.4375	.562	.452	1.150	2.000	1.125	.4375-20	.781	.540	
<b>FE8</b>	8	.5000	.625	.515	1.337	2.250	1.250	.5000-20	.875	.610	
<b>FE10</b>	10	.6250	.750	.577	1.525	2.500	1.375	.6250-18	1.062	.750	
<b>FE12</b>	12	.7500	.875	.640	1.775	2.875	1.625	.7500-16	1.250	.850	
<b>FE14</b>	14	.8750	.875	.765	2.025	3.375	1.875	.8750-14	1.375	1.000	
<b>FE16</b>	16	1.0000	1.375	1.015	2.775	4.125	2.125	1.2500-12	1.875	1.270	

Outer Member: 4340 Alloy steel, heat treated, magnetic particle inspected,  
cadmium plated and chromate treated

Ball: 440C heat treated


Race: 17-4PH heat treated

Liner: Self-lubricating "E" UNIFLON® per SAE-AS81820 (formerly MIL-B-81820)

# Military Series

## (M81935/2)

### Self-Lubricating

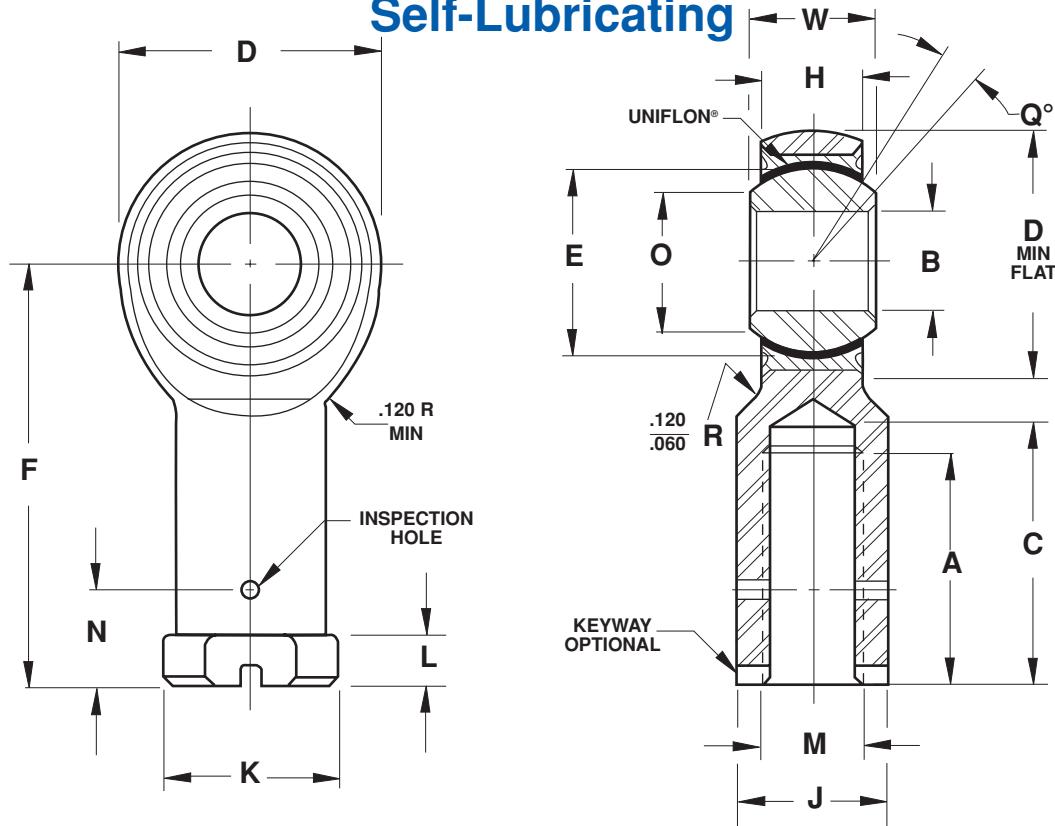

ROD  
ENDS

	OTHER DIMENSIONS				ACROSS WRENCH FLATS	MISALIGNMENT ANGLE	ULTIMATE STATIC RADIAL LOAD	FATIGUE LOAD	AXIAL PROOF LOAD	APPROX WEIGHT	NO LOAD ROTATIONAL BREAKAWAY TORQUE INCH - POUNDS	
	K	N	L	C	J	Q	LBF	LBF	LBF	LBS	MIN	MAX
	.010	.020	.010	.062	MAX	.002	1,470 ⑤	1,000	.080	.05	6	
	-.010	-.020	-.062			-.010						
	.500	.375	.188	.875	.437	15	2,360	1,470	1,000	.080	0.5	6
	.500	.375	.188	.875	.437	15	4,860	2,380	1,000	.084	0.5	6
	.580	.437	.250	1.000	.500	14	7,180	3,020	1,100	.102	1	15
	.660	.437	.250	1.125	.562	8	8,550	3,570	1,660	.161	1	15
	.720	.500	.250	1.250	.625	10	12,000	4,800	1,850	.212	1	15
	.880	.562	.250	1.375	.750	9	19,500	8,260	2,040	.325	1	15
	1.020	.687	.375	1.500	.875	12	21,900	9,180	2,430	.481	1	15
	1.160	.812	.375	1.750	1.000	13	29,300	11,600	2,810	.673	1	15
	1.300	.937	.500	2.062	1.125	6	34,500	13,100	3,320	.959	1	24
	2.020	1.312	.563	2.312	1.750	12	80,300	30,400	4,340	2.717	1	24

#### NOTES

① Add letter "L" to prefix to indicate Left Hand thread  
Example: FEL4

② Add letter "K" to prefix to indicate Keyway  
Example: FEK4

③ For liner specification, see page 52



④ HEIM is qualified to supply this part and all variations per SAE-AS81935  
(formerly MIL-B-81935)

⑤ Based on bolt bending fatigue strength 180,000 PSI

# Metric Precision Series

## Four Piece - Metal to Metal

ROD  
ENDS

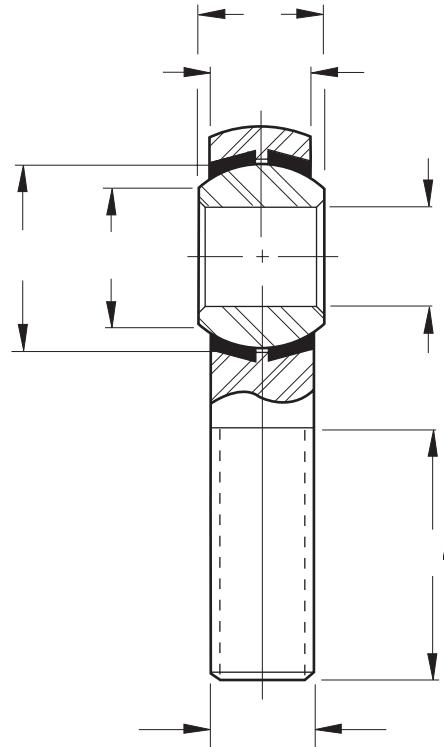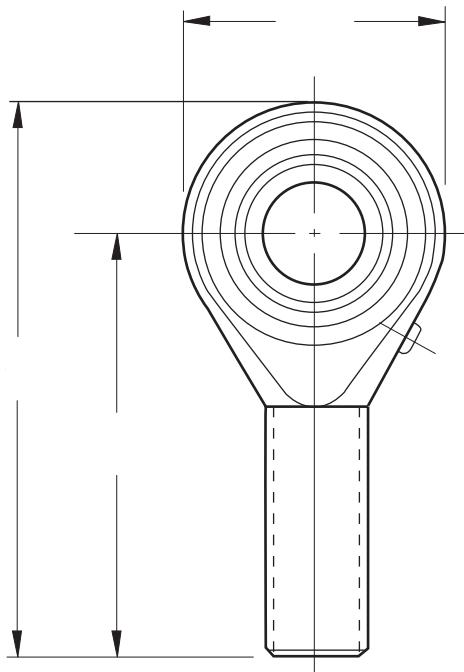

### Series SM, SMG

ROD END NUMBER	DIMENSIONS IN MILLIMETERS										MAXIMUM STATIC RADIAL LOAD	APPROX WEIGHT
	BORE	BALL WIDTH	HOUSING WIDTH	HEAD DIAMETER	LENGTH TO CENTER OF BALL	OVERALL LENGTH	THREAD LENGTH	THREAD SIZE	BALL DIAMETER	BALL FLAT DIAMETER		
	B	W	H	D	F	G	A	M	E	O		
	H7	.127 -.127	.254 -.254	.787 -.787	.787 -.787	.787 -.787	+1.575 -1.575		REF	REF	daN	g
<b>SM5</b>	5	8	6	16	33	35	20	M5 x 0,8	11.11	7.71	340	12
<b>SM6</b>	6	9	6.75	18	36	39	22	M6 x 1	12.70	8.96	490	18
<b>SM8</b>	8	12	9	22	42	47	25	M8 x 1,25	15.88	10.40	830	35
<b>SMG10</b>	10	14	10.50	26	48	56	29	M10 x 1,5	19.05	12.92	1,270	57
<b>SMG12</b>	12	16	12	30	54	65	33	M12 x 1,75	22.23	15.43	1,670	87
<b>SMG14</b>	14	19	13.50	34	60	74	36	M14 x 2	25.40	16.86	2,060	120
<b>SMG16</b>	16	21	15	38	66	83	40	M16 x 2	28.58	19.39	2,500	170
<b>SMG18</b>	18	23	16.50	42	72	92	44	M18 x 1,5	31.75	21.89	2,940	240
<b>SMG20</b>	20	25	18	46	78	100	47	M20 x 1,5	34.92	24.38	3,430	320
<b>SMG22</b>	22	28	20	50	84	109	51	M22 x 1,5	38.10	25.84	4,120	420
<b>SMG25</b>	25	31	22	56	94	122	57	M24 x 2	42.85	29.60	5,000	580

**Outer Member:** Carbon steel, with protective coating for corrosion resistance

**Ball:** Chrome steel, heat treated

**Inserts:** Brass  
NOTES



① Add letter "L" to prefix to indicate Left Hand thread  
Example: SML8

② Also available: extra capacity, stainless steel, teflon liner, chrome-plated ball, reduced play. Consult factory for information.

③ Letter "G" indicates lubricator (SMG10 to SMG25).

# Metric Precision Series

## Four Piece - Metal to Metal

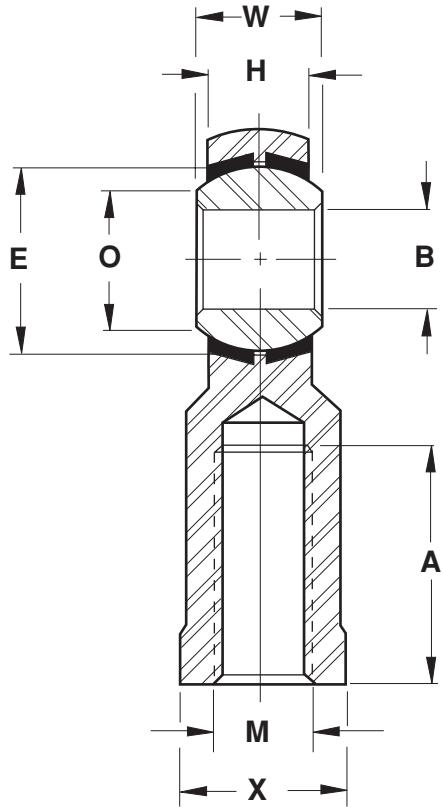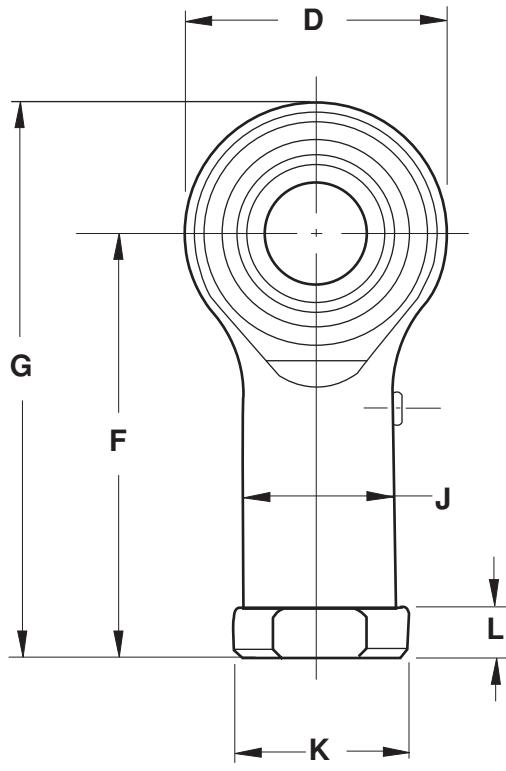

ROD  
ENDS

### Series SF, SFG

ROD END NUMBER	DIMENSIONS IN MILLIMETERS													MAXIMUM STATIC RADIAL LOAD daN	APPROX WEIGHT g		
	BORE	BALL WIDTH	HOUSING WIDTH	HEAD DIAMETER	LENGTH TO CENTER OF BALL	OVERALL LENGTH	THREAD LENGTH	THREAD SIZE	BALL DIAMETER	BALL FLAT DIAMETER	ACROSS WRENCH FLATS	OTHER DIMENSIONS					
	B	W	H	D	F	G	A	M	E	O	J	X	K	L			
	H7	.+127 -.127	.+254 -.254	.+787 -.787	.+787 -.787	.+787 -.787	+1.575 -1.575		REF	REF	.+254 -.254	.+254 -.254	.+254 -.254	.+254 -.254			
<b>SF5</b>	5	8	6	16	27	35	14	M5 x 0,8	11.11	7.71	7.50	8	9.50	4	560	14	
<b>SF6</b>	6	9	6.75	18	30	39	14	M6 x 1	12.70	8.96	9.50	10	12	5	690	22	
<b>SF8</b>	8	12	9	22	36	47	17	M8 x 1,25	15.88	10.40	12.50	13	16	5	980	38	
<b>SFG10</b>	10	14	10.50	26	43	56	20	M10 x 1,5	19.05	12.92	15	16	19	6.50	1,320	70	
<b>SFG12</b>	12	16	12	30	50	65	22	M12 x 1,75	22.23	15.43	17.50	18	22	6.50	1,670	110	
<b>SFG14</b>	14	19	13.50	34	57	74	27	M14 x 2	25.40	16.86	20	21	25	8	2,060	150	
<b>SFG16</b>	16	21	15	38	64	83	33	M16 x 2	28.58	19.39	22	24	27	8	2,500	200	
<b>SFG18</b>	18	23	16.50	42	71	92	36	M18 x 1,5	31.75	21.89	25	27	31	10	2,940	280	
<b>SFG20</b>	20	25	18	46	77	100	40	M20 x 1,5	34.92	24.38	27.50	30	34	10	3,430	370	
<b>SFG22</b>	22	28	20	50	84	109	43	M22 x 1,5	38.10	25.84	30	34	37	12	4,120	480	
<b>SFG25</b>	25	31	22	56	94	122	48	M24 x 2	42.85	29.60	33.50	36	42	12	5,000	670	

**Outer Member:** Carbon steel, with protective coating for corrosion resistance

#### NOTES

① Add letter "L" to prefix to indicate Left Hand thread

Example: SFL8

② Also available: extra capacity, stainless steel, chrome-plated ball, reduced play. Consult factory for information

③ Letter "G" indicates lubricator (SFG10 to SFG25)

**Ball:** Chrome steel, heat treated

**Inserts:** Brass

# Technical Data

## STATIC RADIAL LOAD

The maximum static radial load permissible for a rod end depends on three factors: race material compressive strength; rod end head strength; and shank strength. The maximum static radial load is determined by taking the *lowest* of the three following values:

- Race material compressive strengths (R)

$$R = E \times H \times X$$

- Rod end head strength (T)

*insert construction*

$$T = [D - (E + .176 H)] \times H \times X$$

*cartridge type construction*

$$T_1 = [(\frac{H}{2} \sqrt{D^2 - H^2}) + (\frac{D^2}{2} \times \sin^{-1} \frac{H}{D}) - (\text{O.D. of bearing} \times H)] \times X$$

angle of  $\frac{H}{D}$  expressed in radians

- Shank Strength (S)

*male threaded rod end*

$$S = [(\text{root diameter of thread}^2 \times .78) - (N^2 \times .78)] \times X$$

*female threaded rod end*

$$S_1 = [(J^2 \times .78) - (\text{major diameter of thread}^2 \times .78)] \times X$$

Where:

E = Ball Diameter

H = Housing Width

X = Allowable Stress (see table)

D = Head Diameter

N = Diameter of Drilled Hole in Shank of Male Rod Ends

J = Shank Diameter of Female Rod End

## STATIC AXIAL LOAD

The maximum available axial load for a rod end is determined by the following formula. This formula does not take into consideration bending of the shank due to a moment of force. Also, this formula does not consider the strength of the stake in cartridge type of construction.

- Axial Strength (A)

$$A = .78 [(E + .176 H)^2 - E^2] \times X$$

Where:

X = Allowable Stress (See Table)

E = Ball Diameter

H = Housing Width

MATERIAL STRESS TABLE	
Material	Allowable Stress (PSI)
Brass	30,000
Aluminum Bronze	35,000
300 Series Stainless Steel	35,000
Low Carbon Steel	52,000
Alloy Steel	140,000

## MISALIGNMENT

The angle of misalignment in a rod end is controlled by the outside diameter of the head. The maximum degree of misalignment is obtained when the head contacts the side of the fork or clevis in which it is mounted.

*Maximum misalignment is calculated by the following formula.*

- Rod End Angle ( $\alpha$ ):


$$\alpha = \sin^{-1} \frac{W}{D} - \sin^{-1} \frac{H}{D}$$

Where:

D = Head diameter or diameter of outer race

H = Housing width

W = Ball width

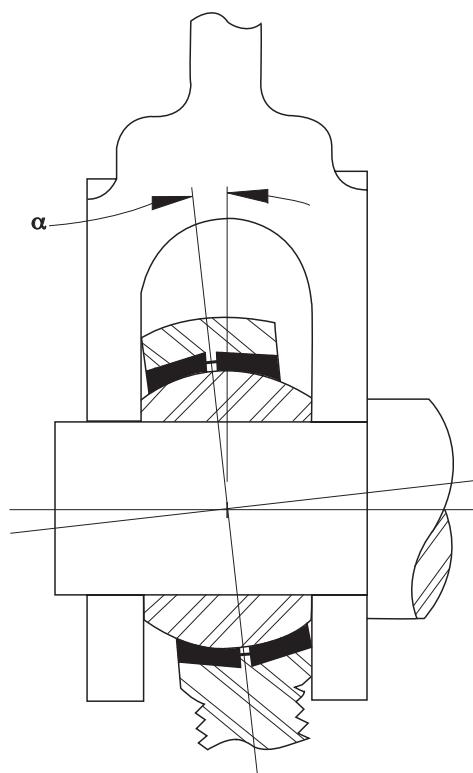

- Angles of misalignment for series:

HM	HF	CMHD	CFHD
HM C	HF C	M CR	F CR
HM M	HF M	HMX G	HFX G
HME M	HFE M	BHM	BHF

ROD END SIZE	MISALIGNMENT +/- DEGREES
2	8.5
2A	7.0
3	6.5
4	8.0
5	7.0
6	6.0
7	7.0
8	6.0
10	8.0
12	7.0
16	8.5

- Angles of misalignment for series:

M M      MD M

ROD END SIZE	MISALIGNMENT +/- DEGREES
3414	9.5
3514	8.0
3614	9.5
3616	9.5
4414	10.5
4615	11.0
4616	12.5

- Angles of misalignment for series:

F M


ROD END SIZE	MISALIGNMENT +/- DEGREES
3414	9.5
34714	9.5
3416	10.5
3514	9.5
4414	10.5
4519	11.5

## STUDS

Studs are used in combination with Heim rod ends to simplify mounting. Studs are compatible with the following Heim rod end series:

M CR	F CR
HM C	HF C
HM	HF
CMHD	CFHD

The stud is designed to accommodate up to  $\pm 25^\circ$  misalignment in any direction and has a wrench flat to facilitate tightening. Add letter "Y" to suffix to indicate stud. Example: CMHD10Y

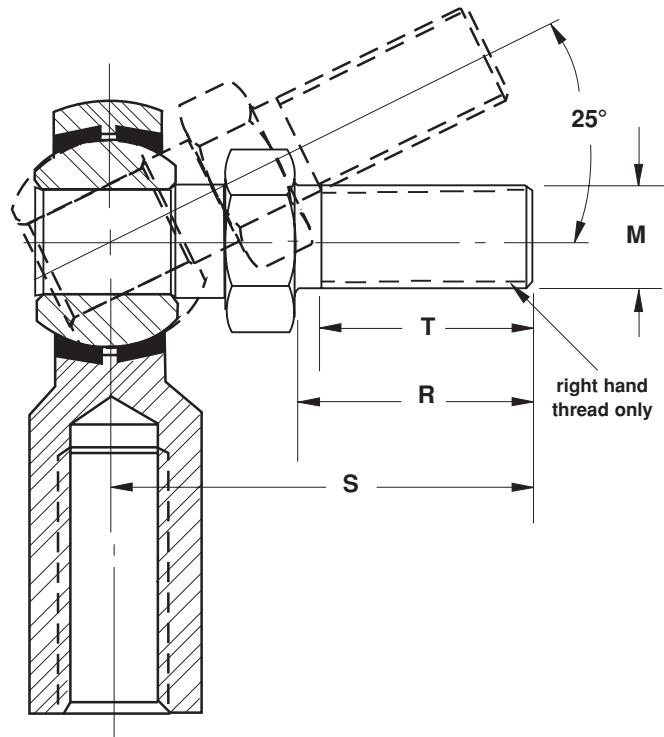


## STUD DIMENSIONS

TO FIT ROD END SIZE	DIMENSIONS IN INCHES			
	R	S	M	
	+.010 -.010	.030 -.030		UNF-2A
3	.500	.969		.1900-32
4	.562	1.047		.2500-28
5	.687	1.234		.3125-24
6	.906	1.540		.3750-24
7	1.125	1.930		.4375-20
8	1.125	2.000		.5000-20
10	1.500	2.500		.6250-18
12	1.812	3.000		.7500-16

## KEYWAYS

Keyway slots, where available, are dimensioned as follows. Contact the Heim Engineering Department to determine keyway slot availability on a particular size.

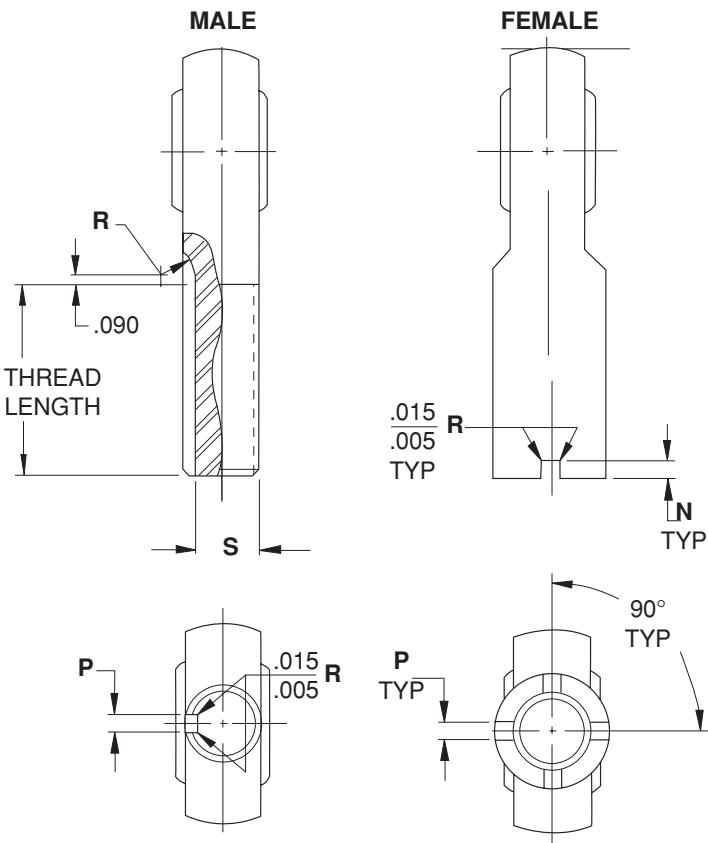

**ROD END KEYWAY (Ref NAS 559)**

THREAD OD REF	DIMENSIONS IN INCHES			
	N	P	S	R
	+.005 -.000	+.005 -.000	.000 -.005	REF
.2500	.056	.062	.201	.255
.3125	.056	.062	.260	.255
.3750	.056	.093	.311	.255
.4375	.069	.093	.370	.255
.5000	.069	.093	.436	.255
.5625	.077	.125	.478	.255
.6250	.077	.125	.541	.255
.7500	.077	.125	.633	.255
.8750	.086	.156	.777	.318
1.0000	.094	.156	.900	.318
1.1250	.094	.187	1.010	.382
1.2500	.116	.187	1.136	.382
1.3750	.116	.250	1.236	.445
1.5000	.116	.250	1.361	.445
1.6250	.129	.250	1.477	.445
1.7500	.129	.312	1.589	.508
1.8750	.129	.312	1.714	.508
2.0000	.129	.312	1.839	.508
2.1250	.129	.312	1.955	.508
2.2500	.129	.312	2.080	.508

## MILITARY SPECIFICATIONS

Many of the processes used by Heim in the manufacture of rod ends are performed to U.S. Military Specifications. A partial list of these specifications follows:

PROCESS	Performed in accordance with:
Anodize	SAE-AMS-A-8625 Type 1 or 2 (formerly MIL-A-8625 Type 1 or 2)
Cadmium Plate	SAE-AMS-QQ-P-416 Type 1 Class 2 (formerly QQ-P-416)
Chrome Plate	SAE-AMS-C-320 Class 2 (.0002 min) (formerly QQ-C-320)
Heat Treat	SAE-AMS-H-6875 (formerly MIL-H-6875) SAE-AMS-H-7199 (formerly MIL-H-7199)
Magnetic Particle Inspection	ASTM-E-1444
Penetrant Inspection	ASTM-1417 (formerly MIL-I-6866)

# Design Options

Heim Unibal® rod end and spherical bearings can be ordered with the following design options at extra cost.


DESIGN OPTIONS	OPTION OFFERED ON THESE SERIES	ORDERING INSTRUCTIONS & PART NUMBER EXAMPLE FOR SPECIFYING DESIGN OPTIONS		
Chrome Plated Balls	LS	add "PB" to part number suffix Example: LS6 with a chrome plated ball would be an LS6PB		
Cross Drilled Oil Hole	LSS      LHA      LHB      LHSS	COS      COM      LH	add "G" to part number suffix Example: an LSS8 with cross drilled oil hole in ball and race and grooved I.D. on the ball would be an LSS8G	
Keyway/Keyslot (per NAS 559)	HM      HM C      HM M      HME M      HMX G      M M      BHM	HF      HF C      HF M      HFE M      HFX G      F M	add "K" to part number prefix Example: an HME8M with a keyway would be an HMKE8M. (See page 30 for Keyway/Keyslot specifications)	
Lubricators	-Zerk Type	HM      HM C      HM M      M M      M CR      BHM	HF      HF C      HF M      F M      F CR	add "G" to part number suffix Example: an HM6 with a zerk type lubricator would be an HM6G (available on sizes 4 through 16 only)
	-Flush type	HM      HM C      HM M      M M      HMX      M CR      BHM	HF      HF C      HF M      F M      HFX      F CR	add "FG" to part number suffix Example: an HF6 with a flush type lubricator would be an HF6FG (available on sizes 4 through 16 only)
Stainless Steel Inserts (300 Series)	HM      HM C      HM M      HME M      HMX      BHM      M M      LS	HF      HF C      HF M      HFE M      HFX      F M      LSS	add "J" to part number prefix Example: an HF10 with 300 series stainless steel inserts would be an HFJ10 Note: HME M and HFE M have a one piece race (cartridge type)	
		HM C      CMHD      HM	HF C      CFHD      HF	add "Y" to part number suffix Example: an HF8C with a stud would be an HF8CY (See page 2 for stud specifications.)



ROD  
ENDS

# Precision Special Purpose Series

## Four Piece - Metal to Metal

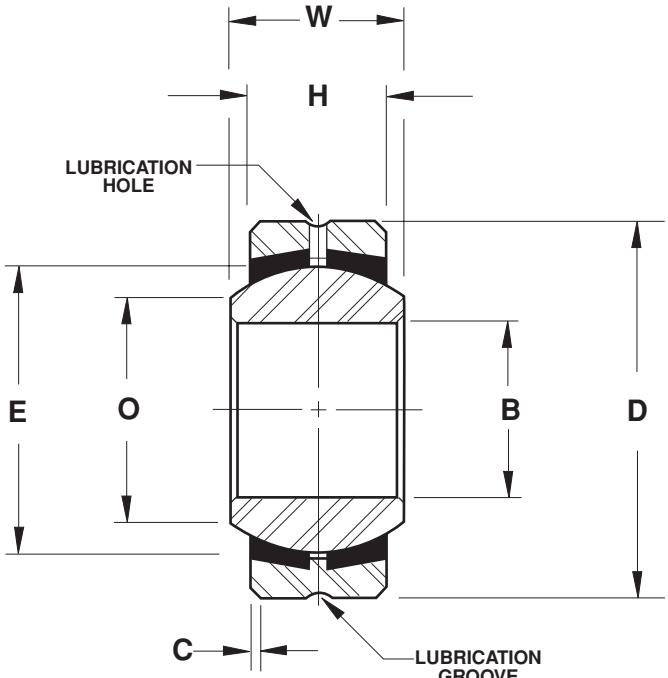

### Series LSS

SPHERICAL BEARING NUMBER	DIMENSIONS IN INCHES							MAXIMUM STATIC RADIAL LOAD	APPROX WEIGHT
	BORE	OUTSIDE DIAMETER	BALL WIDTH	HOUSING WIDTH	CHAMFER	BALL DIAMETER	BALL FLAT DIAMETER		
	B	D	W	H	C	E	O		
LSS2	.1650	.4687	.250	.187	.020	.343	.235	2,000	.01
LSS3	.1900	.5625	.281	.218	.020	.406	.293	2,750	.02
LSS4	.2500	.6562	.343	.250	.022	.500	.364	4,200	.02
LSS5	.3125	.7500	.375	.281	.022	.562	.419	5,800	.03
LSS6	.3750	.8125	.406	.312	.032	.625	.475	7,150	.04
LSS7	.4375	.9062	.437	.343	.032	.687	.530	8,625	.05
LSS8	.5000	1.0000	.500	.390	.032	.781	.600	11,200	.07
LSS9	.5625	1.0937	.562	.437	.032	.875	.670	14,000	.09
LSS10	.6250	1.1875	.625	.500	.032	.968	.739	17,700	.12
LSS12	.7500	1.4375	.750	.593	.044	1.187	.920	25,750	.21
LSS14	.8750	1.5625	.875	.703	.044	1.312	.980	33,600	.27
LSS16	1.0000	1.7500	1.000	.797	.044	1.500	1.118	37,520	.38

Outer Member: 4130 or 4340 Alloy steel, heat treated, with protective coating for corrosion resistance on all surfaces exposed after installation.

#### NOTES


- ① For design options, see page 29
- ② For Engineering data, see pages 47 and 48
- ③ "H" tolerance across inserts is +/- .015

Ball: 52100 Alloy steel, heat treated, chrome plated

Inserts: Copper alloy

# Precision Special Purpose Series

## Four Piece - Metal to Metal

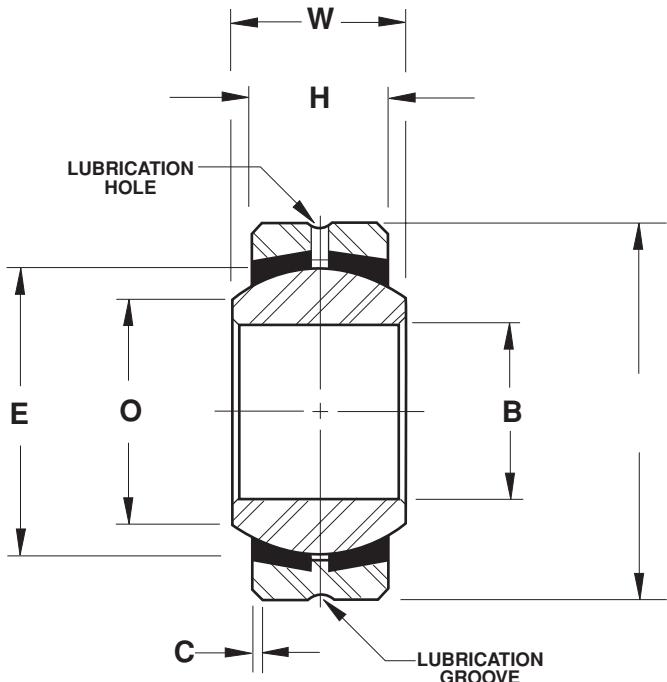

### Series LS

SPHERICAL BEARING NUMBER	DIMENSIONS IN INCHES							MAXIMUM STATIC RADIAL LOAD	APPROX WEIGHT
	BORE	OUTSIDE DIAMETER	BALL WIDTH	HOUSING WIDTH	CHAMFER	BALL DIAMETER	BALL FLAT DIAMETER		
	B	D	W	H	C	E	O		
LS3	.1900	.6250	.281	.187	.016	.406	.293	2,960	.02
LS4	.2500	.7500	.375	.281	.016	.515	.354	5,245	.04
LS5	.3125	.8750	.437	.313	.016	.625	.447	6,550	.05
LS6	.3750	1.0000	.500	.375	.016	.718	.517	8,605	.08
LS7	.4375	1.1875	.562	.437	.032	.812	.586	11,100	.12
LS8	.5000	1.3125	.687	.531	.044	.937	.637	15,600	.18
LS10	.6250	1.5625	.875	.687	.044	1.187	.802	25,700	.33
LS12	.7500	2.2500	1.250	.937	.044	1.625	1.038	47,600	.97
LS16	1.0000	2.3750	1.125	.875	.062	1.750	1.345	48,200	.94
LS19	1.1875	2.6250	1.250	1.000	.085	2.000	1.562	63,000	1.27
LS24	1.5000	3.2500	1.500	1.250	.085	2.500	2.000	98,000	2.38
LS30	1.8750	4.0000	1.625	1.313	.125	3.000	2.521	123,500	3.75

**Outer Member:** Carbon steel, with protective coating for corrosion resistance on all surfaces exposed after installation

#### NOTES


- ① For design options, see page 29
- ② For Engineering data, see pages 47 and 48
- ③ "H" tolerance across inserts is  $\pm .015$

**Ball:** 52100 Alloy steel, heat treated

**Inserts:** Brass

# Precision Series

## Two Piece - Metal to Metal

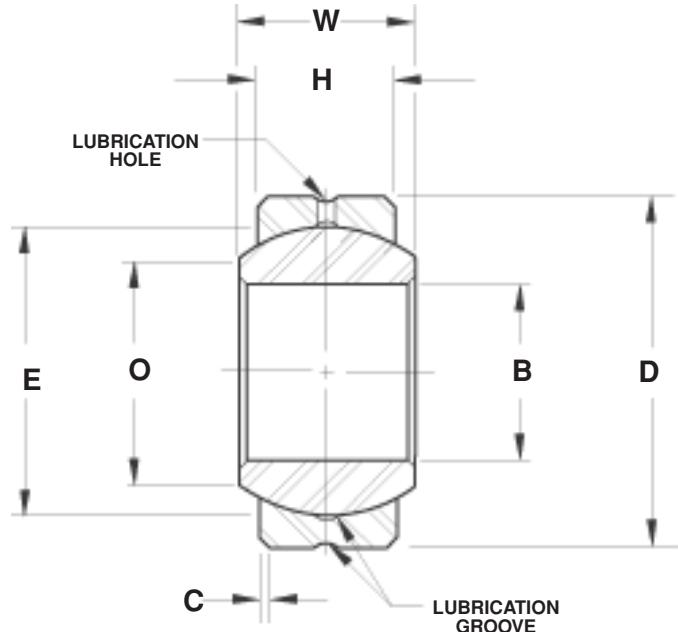

SPHERICAL BEARINGS

### Series LHA, LHB, LHSS

SPHERICAL BEARING NUMBER			DIMENSIONS IN INCHES							MAXIMUM STATIC RADIAL LOAD			APPROX WEIGHT	
			BORE	OUTSIDE DIAMETER	BALL WIDTH	HOUSING WIDTH	CHAMFER	BALL DIAMETER	BALL FLAT DIAMETER					
			B	D	W	H	C	E	O	LBF	LHA SERIES	LHB SERIES	LHSS SERIES	
+.0000 -.0005	+.0000 -.0005	.000 -.005	.000 -.005	.000 -.005	.005 -.005	.005 -.005	.015 -.000	REF	REF	4,400 2,000 6,480 2,750 10,000 4,200 13,900 5,800 18,750 22,300 .530 26,900 11,200 36,000 48,000 78,000 103,000 125,000	2,900 4,000 5,650 7,150 8,800 10,600 13,700 14,800 17,200 21,800 30,000 43,000 52,000 53,800	2,900 4,000 5,650 7,150 8,800 10,600 13,700 14,800 17,200 21,800 30,000 43,000 52,000 53,800	.01 .02 .02 .02 .03 .04 .05 .07 .09 .12 .21 .27 .38	LBS
LHA2 LHA3 LHA4 LHA5 LHA6 LHA7 LHA8 LHA9 LHA10 LHA12 LHA14 LHA16	LHB2 LHB3 LHB4 LHB5 LHB6 LHB7 LHB8 LHB9 LHB10 LHB12 LHB14 LHB16	LHSS2 LHSS3 LHSS4 LHSS5 LHSS6 LHSS7 LHSS8 LHSS9 LHSS10 LHSS12 LHSS14 LHSS16	.1650 .1900 .2500 .3125 .3750 .4375 .5000 .5625 .6250 .7500 .8750 1.0000	.4687 .5625 .6562 .7500 .8125 .9062 1.0000 1.0937 1.1875 1.4375 1.5625 1.7500	.250 .281 .343 .375 .406 .437 .500 .562 .625 .750 .875 1.000	.187 .218 .250 .281 .312 .343 .390 .437 .500 .593 .703 .797	.020 .020 .022 .022 .032 .032 .032 .032 .032 .044 .044 .044	.343 .406 .500 .562 .625 .687 .781 .875 .968 1.187 1.312 1.500	.235 .293 .364 .419 .475 .530 .600 .670 .739 .920 .980 1.118	4,400 6,480 10,000 13,900 18,750 22,300 26,900 36,000 48,000 78,000 103,000 125,000	2,000 4,200 10,000 13,900 17,200 22,300 26,900 36,000 48,000 78,000 103,000 125,000	2,900 4,000 5,650 7,150 8,800 10,600 13,700 14,800 17,200 21,800 30,000 43,000 52,000 53,800	.01 .02 .02 .02 .03 .04 .05 .07 .09 .12 .21 .27 .38	LBS

Outer Member: LHA: 4130 or 4340 Alloy steel, heat treated, with protective coating for corrosion resistance on all surfaces exposed after installation

LHB: Aluminum bronze

LHSS: 300 Series stainless steel


#### NOTES

- ① For design options, see page 29
- ② For Engineering data, see pages 47 and 48

Ball: LHA: 52100 Alloy steel, heat treated, chrome plated  
LHB: 52100 Alloy steel, heat treated, chrome plated  
LHSS: 440C Stainless steel, heat treated

# Precision Series

## Two Piece - Metal to Metal

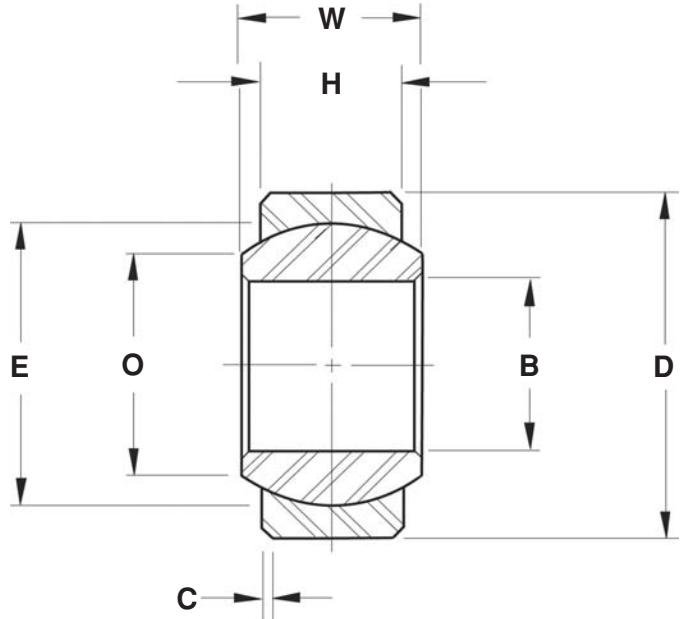

### Series COS

SPHERICAL BEARING NUMBER	DIMENSIONS IN INCHES							MAXIMUM STATIC RADIAL LOAD	APPROX WEIGHT
	BORE <b>B</b>	OUTSIDE DIAMETER <b>D</b>	BALL WIDTH <b>W</b>	HOUSING WIDTH <b>H</b>	CHAMFER <b>C</b>	BALL DIAMETER <b>E</b>	BALL FLAT DIAMETER <b>O</b>		
	+.0000	+.0000	+.000	+.005	+.015	REF	REF	LBF	LBS
	-.0005	-.0005	-.005	-.005	-.000				
<b>COS3</b>	.1900	.5625	.281	.218	.020	.406	.293	4,800	.02
<b>COS4</b>	.2500	.6562	.343	.250	.022	.500	.364	7,500	.02
<b>COS5</b>	.3125	.7500	.375	.281	.022	.562	.419	10,400	.03
<b>COS6</b>	.3750	.8125	.406	.312	.032	.625	.475	14,000	.04
<b>COS7</b>	.4375	.9062	.437	.343	.032	.687	.530	16,750	.05
<b>COS8</b>	.5000	1.0000	.500	.390	.032	.781	.600	20,000	.07
<b>COS9</b>	.5625	1.0937	.562	.437	.032	.875	.670	27,000	.09
<b>COS10</b>	.6250	1.1875	.625	.500	.032	.968	.739	36,000	.12
<b>COS12</b>	.7500	1.4375	.750	.593	.044	1.187	.920	54,000	.21
<b>COS14</b>	.8750	1.5625	.875	.703	.044	1.312	.980	77,000	.27
<b>COS16</b>	1.0000	1.7500	1.000	.797	.044	1.500	1.118	93,500	.38

Outer Member: 17-4 PH Stainless steel, heat treated

Ball: 440C Stainless steel, heat treated, chrome plated


#### NOTES

- ① For design options, see page 29
- ② For Engineering data, see pages 47 and 48



# Precision Series

## Self-Lubricating

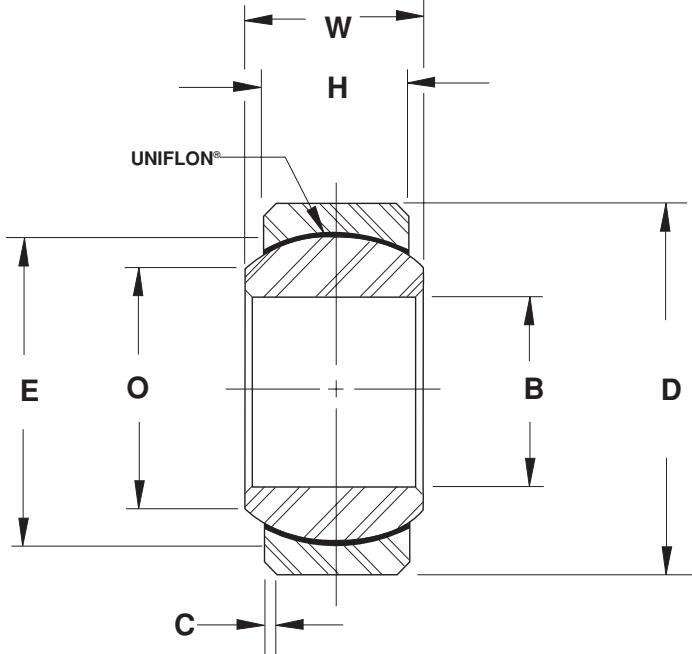

SPHERICAL  
BEARINGS

### Series LHSSE

SPHERICAL BEARING NUMBER	DIMENSIONS IN INCHES							MAXIMUM STATIC RADIAL LOAD	APPROX WEIGHT
	BORE	OUTSIDE DIAMETER	BALL WIDTH	HOUSING WIDTH	CHAMFER	BALL DIAMETER	BALL FLAT DIAMETER		
	B	D	W	H	C	E	O		
LHSSE2	.1650	.4687	.250	.187	.020	.343	.235	3,200	.01
LHSSE3	.1900	.5625	.281	.218	.020	.406	.293	4,400	.02
LHSSE4	.2500	.6562	.343	.250	.022	.500	.364	6,700	.02
LHSSE5	.3125	.7500	.375	.281	.022	.562	.419	9,200	.03
LHSSE6	.3750	.8125	.406	.312	.032	.625	.475	11,700	.04
LHSSE7	.4375	.9062	.437	.343	.032	.687	.530	14,100	.05
LHSSE8	.5000	1.0000	.500	.390	.032	.781	.600	17,900	.07
LHSSE9	.5625	1.0937	.562	.437	.032	.875	.670	22,900	.09
LHSSE10	.6250	1.1875	.625	.500	.032	.968	.739	29,000	.12
LHSSE12	.7500	1.4375	.750	.593	.044	1.187	.920	42,200	.21
LHSSE14	.8750	1.5625	.875	.703	.044	1.312	.980	55,300	.27
LHSSE16	1.0000	1.7500	1.000	.797	.044	1.500	1.118	71,700	.38

Outer Member: 300 Series stainless steel

Ball: 440C Stainless steel, heat treated


Liner: "E" UNIFLON®

#### NOTES

- ① For liner specification, see page 52
- ② For Engineering data, see pages 47 thru 48

# Precision Series

## Self-Lubricating

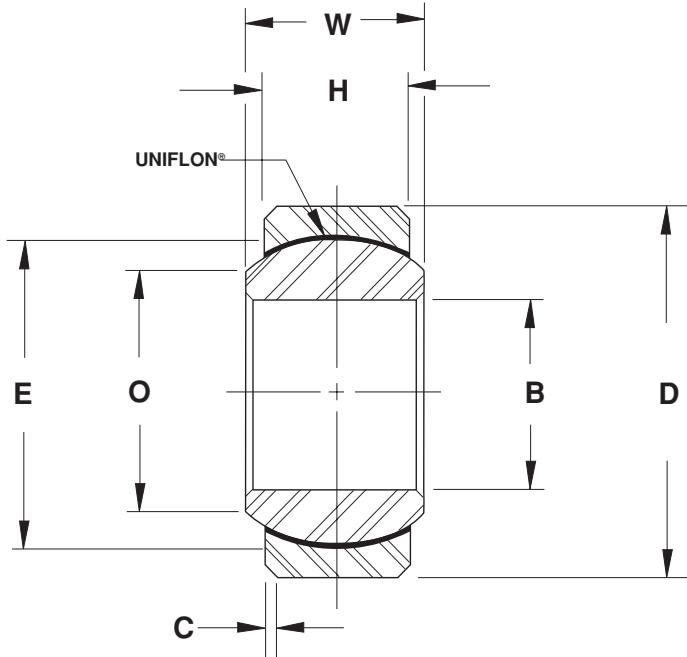

### Series LHSSVV

SPHERICAL BEARING NUMBER	DIMENSIONS IN INCHES							MAXIMUM STATIC RADIAL LOAD	APPROX WEIGHT
	BORE	OUTSIDE DIAMETER	BALL WIDTH	HOUSING WIDTH	CHAMFER	BALL DIAMETER	BALL FLAT DIAMETER		
	B	D	W	H	C	E	O		
LHSSVV2	.1650	.4687	.250	.187	.020	.343	.235	2,000	.01
LHSSVV3	.1900	.5625	.281	.218	.020	.406	.293	2,750	.02
LHSSVV4	.2500	.6562	.343	.250	.022	.500	.364	4,200	.02
LHSSVV5	.3125	.7500	.375	.281	.022	.562	.419	5,800	.03
LHSSVV6	.3750	.8125	.406	.312	.032	.625	.475	7,750	.04
LHSSVV7	.4375	.9062	.437	.343	.032	.687	.530	9,300	.05
LHSSVV8	.5000	1.0000	.500	.390	.032	.781	.600	11,200	.07
LHSSVV9	.5625	1.0937	.562	.437	.032	.875	.670	14,800	.09
LHSSVV10	.6250	1.1875	.625	.500	.032	.968	.739	20,000	.12
LHSSVV12	.7500	1.4375	.750	.593	.044	1.187	.920	30,000	.21
LHSSVV14	.8750	1.5625	.875	.703	.044	1.312	.980	43,000	.27
LHSSVV16	1.0000	1.7500	1.000	.797	.044	1.500	1.118	52,000	.38

Outer Member: 300 Series stainless steel

Ball: 440C Stainless steel, heat treated


Liner: "VV" UNIFLON®

#### NOTES

- ① For liner specification, see page 52
- ② For Engineering data, see pages 47 thru 48

# Commercial Series

## Two Piece - Metal to Metal

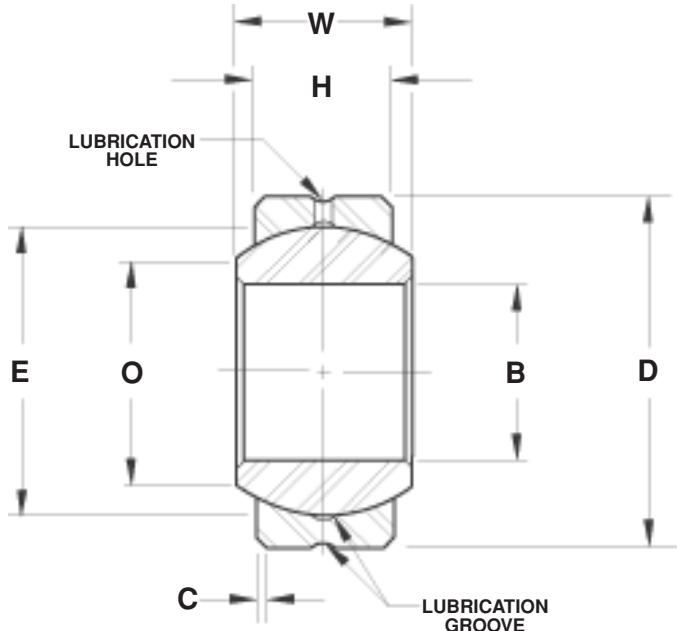

SPHERICAL BEARINGS

### Series COM

SPHERICAL BEARING NUMBER	DIMENSIONS IN INCHES							MAXIMUM STATIC RADIAL LOAD	APPROX WEIGHT
	BORE	OUTSIDE DIAMETER	BALL WIDTH	HOUSING WIDTH	CHAMFER	BALL DIAMETER	BALL FLAT DIAMETER		
	B	D	W	H	C	E	O		
COM3	.1900	.5625	.281	.218	.020	.406	.293	3,250	.02
COM4	.2500	.6562	.343	.250	.022	.500	.364	4,900	.02
COM5	.3125	.7500	.375	.281	.032	.562	.419	6,450	.03
COM6	.3750	.8125	.406	.312	.032	.625	.475	8,250	.04
COM7	.4375	.9062	.437	.343	.032	.687	.530	10,200	.05
COM8	.5000	1.0000	.500	.390	.032	.781	.600	13,600	.07
COM9	.5625	1.0937	.562	.437	.032	.875	.670	15,900	.09
COM10	.6250	1.1875	.625	.500	.032	.968	.739	21,000	.12
COM12	.7500	1.4375	.750	.593	.044	1.187	.920	30,000	.21
COM14	.8750	1.5625	.875	.703	.044	1.312	.980	41,100	.27
COM16	1.0000	1.7500	1.000	.797	.044	1.500	1.118	54,700	.38

Outer Member: Carbon steel


Ball: 52100 Alloy steel, heat treated, chrome plated

#### NOTES

- ① For design options, see page 29
- ② For Engineering data, see pages 47 thru 48

# Commercial Series

## Two Piece - Metal to Metal

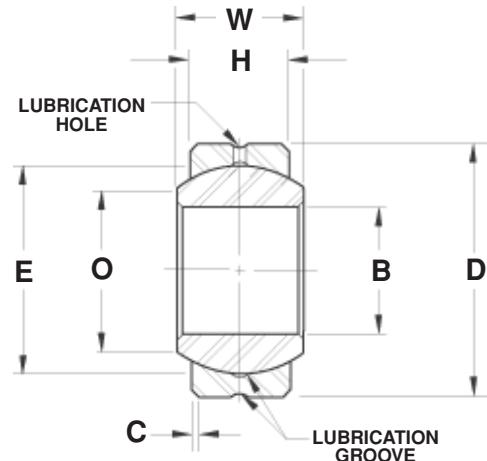

### Series LH D


SPHERICAL BEARING NUMBER	DIMENSIONS IN INCHES							MAXIMUM STATIC RADIAL LOAD
	BORE	OUTSIDE DIAMETER	BALL WIDTH	HOUSING WIDTH	CHAMFER	BALL DIAMETER	BALL FLAT DIAMETER	
	B	D	W	H	C	E	O	
+ .0000	+ .0000	.000	.007		.015			LBF
- .0007	- .0007	.005	.007		.000	REF	REF	
<b>LH16D</b>	1.0000	2.0000	1.000	.781	.035	1.688	1.360	68,525
<b>LH19D</b>	1.1875	2.3750	1.187	.937	.035	2.000	1.610	97,440
<b>LH20D</b>	1.2500	2.3750	1.187	.937	.035	2.000	1.610	97,440
<b>LH24D</b>	1.5000	2.7500	1.375	1.094	.035	2.313	1.860	131,550
<b>LH28D</b>	1.7500	3.1250	1.562	1.250	.040	2.625	2.080	169,000
<b>LH32D</b>	2.0000	3.5000	1.750	1.375	.040	2.938	2.360	209,985

**Outer Member:** Carbon steel, with protective coating for corrosion resistance on all surfaces exposed after installation

#### NOTES

- ① For design options, see page 29
- ② For Engineering data, see pages 47 thru 48

**Ball:** 52100 Alloy steel, heat treated, chrome plated

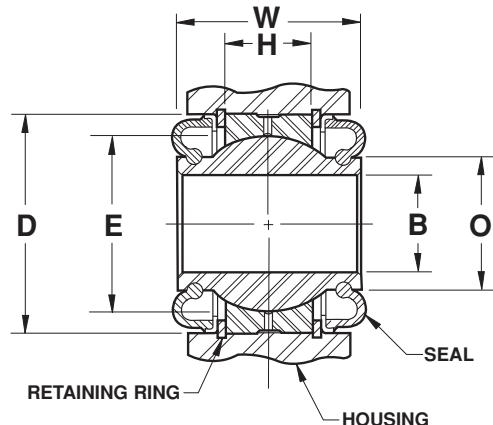

### Series LH PP

SPHERICAL BEARING NUMBER	BORE	OUTSIDE DIAMETER	HOUSING WIDTH	BALL WIDTH	BALL DIAMETER	BALL FLAT DIAMETER	APPROX. ANGLE OF MISALIGNMENT W/SEALS	MAXIMUM STATIC RADIAL LOAD	APPROX WEIGHT
	B	D	H	W	E	O			
	+ .0000	+ .0000	.000	.000	REF	REF			
+ .0000	+ .0000	.000	.000	.000			DEGREES	LBF	LBS
- .0007	- .0007	.005	.005	.005					
<b>LH12PP</b>	.7500	1.5000	.500	1.250	1.250	1.000	12 1/2	31,500	.25
<b>LH16PP</b>	1.0000	2.2500	.875	1.875	1.813	1.375	12 1/2	83,500	.95
<b>LH20PP</b>	1.2500	2.3750	.875	1.875	2.000	1.625	12 1/2	94,000	.99
<b>LH24PP</b>	1.5000	2.7500	1.000	1.875	2.375	2.000	12 1/2	130,000	1.44

**Outer Member:** Carbon steel, with protective coating for corrosion resistance


**Ball:** 52100 Alloy steel, heat treated, chrome plated

**Seals:** Synthetic rubber

# Military Series

## (MS14104, MS14101)

### Self-Lubricating

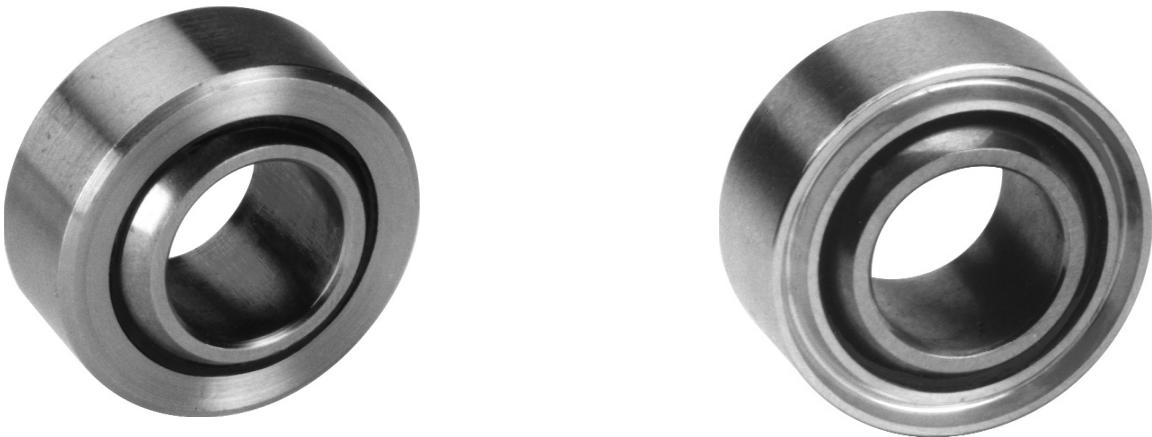

SPHERICAL  
BEARINGS

#### Series NE, NEG


PLAIN		GROOVED		DIMENSIONS IN INCHES					
HEIM PART NO	MS14104 DASH NO	HEIM PART NO	MS14101 DASH NO	BORE	OUTSIDE DI- AMETER	BALL WIDTH	HOUSING WIDTH		
				<b>B</b>	<b>D</b>	<b>W</b>	<b>H</b>	<b>N</b>	
NE3	3	NEG3	3	.1900	.5625	.281	.218	.025	
NE4	4	NEG4	4	.2500	.6562	.343	.250	.025	
NE5	5	NEG5A	5A	.3125	.7500	.375	.281	.035	
NE6	6	NEG6	6	.3750	.8125	.406	.312	.035	
NE7	7	NEG7	7	.4375	.9062	.437	.343	.035	
NE8	8	NEG8	8	.5000	1.0000	.500	.390	.055	
NE9	9	NEG9	9	.5625	1.0937	.562	.437	.055	
NE10	10	NEG10	10	.6250	1.1875	.625	.500	.055	
NE12	12	NEG12	12	.7500	1.4375	.750	.593	.055	
NE14	14	NEG14	14	.8750	1.5625	.875	.703	.055	
NE16	16	NEG16	16	1.0000	1.7500	1.000	.797	.055	

Outer Member: 17-4PH Stainless steel heat treated

Ball: 440C Stainless steel heat treated

Liner: Self-lubricating "E" UNIFLON® per SAE-AS81820 (formerly MIL-B-81820)

# Military Series (MS14104, MS14101) Self-Lubricating

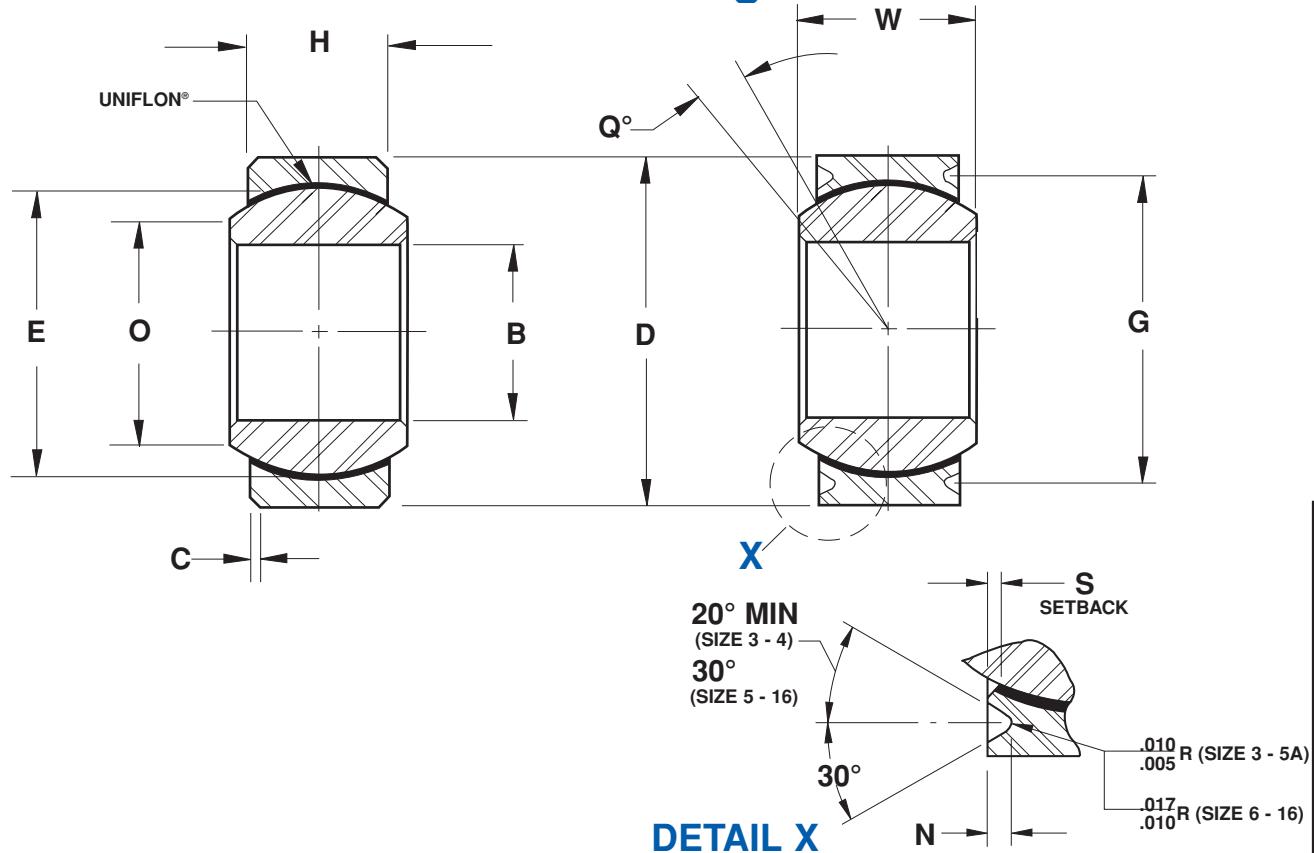

OTHER DIMENSIONS				BALL DIAMETER	BALL FLAT DIAMETER		STATIC LIMIT LOAD		OSCILLATING LOAD	NO LOAD ROTATIONAL BREAKAWAY TORQUE (RANGE)	APPROX WEIGHT
G	C	S	E	REF	REF	Q	LBF		LBF	IN-LBS	LBS
+.000	+.005										
-.008	-.005	MAX	REF	REF	DEG MIN	RADIAL	AXIAL	LBF	IN-LBS	LBS	
.500	.015	.030	.406	.293	10	3,975	150	1,500	0.25-5	.020	
.594	.015	.030	.500	.364	10	6,040	430	3,320	0.25-5	.020	
.660	.015	.030	.562	.419	10	8,750	700	5,460	0.25-8	.030	
.712	.025	.035	.625	.475	9	10,540	1,100	6,600	0.25-8	.040	
.806	.025	.035	.687	.530	8	13,200	1,400	8,050	0.25-8	.050	
.876	.025	.035	.781	.600	8	17,900	2,100	10,400	0.25-8	.070	
.970	.025	.040	.875	.670	8	23,200	3,680	13,000	0.25-8	.090	
1.063	.025	.040	.968	.739	8	30,500	4,720	16,450	0.25-8	.120	
1.313	.035	.045	1.187	.920	8	46,400	6,750	23,600	0.25-8	.210	
1.438	.035	.045	1.312	.980	8	62,200	9,350	30,250	0.25-12	.270	
1.626	.035	.045	1.500	1.118	9	82,200	12,160	38,000	0.25-12	.390	

#### NOTES

- ① For liner specification, see page 52
- ② Heim is qualified to supply this part and all variations per SAE-AS81820 (formerly MIL-B-81820)

# Military Series

## (M81820/4, M81820/1)

### Self-Lubricating



SPHERICAL  
BEARINGS

#### Series NEE, NEEG

PLAIN		GROOVED		DIMENSIONS IN INCHES					
HEIM PART NO	M81820/4 DASH NO	HEIM PART NO	M81820/1 DASH NO	BORE	OUTSIDE DI- AMETER	BALL WIDTH	HOUSING WIDTH	BALL DIAMETER	
				B	D	W	H	E	
NEE4	4	NEEG4	4	.2510	.6562	.343	.250	.500	
NEE5	5	NEEG5	5	.3135	.7500	.375	.281	.562	
NEE6	6	NEEG6	6	.3760	.8125	.406	.312	.625	
NEE7	7	NEEG7	7	.4385	.9062	.437	.343	.678	
NEE8	8	NEEG8	8	.5010	1.0000	.500	.390	.781	
NEE9	9	NEEG9	9	.5635	1.0937	.562	.437	.875	
NEE10	10	NEEG10	10	.6260	1.1875	.625	.500	.968	
NEE12	12	NEEG12	12	.7510	1.4375	.750	.593	1.187	
NEE14	14	NEEG14	14	.8760	1.5625	.875	.703	1.312	
NEE16	16	NEEG16	16	1.0010	1.7500	1.000	.797	1.500	

Outer Member: 17-4PH Stainless steel heat treated


Ball: PH13-8MO Stainless steel heat treated

Liner: Self-lubricating "E" UNIFLON® per SAE-AS81820 (formerly MIL-B-81820)

# Military Series

## (M81820/4, M81820/1)

### Self-Lubricating

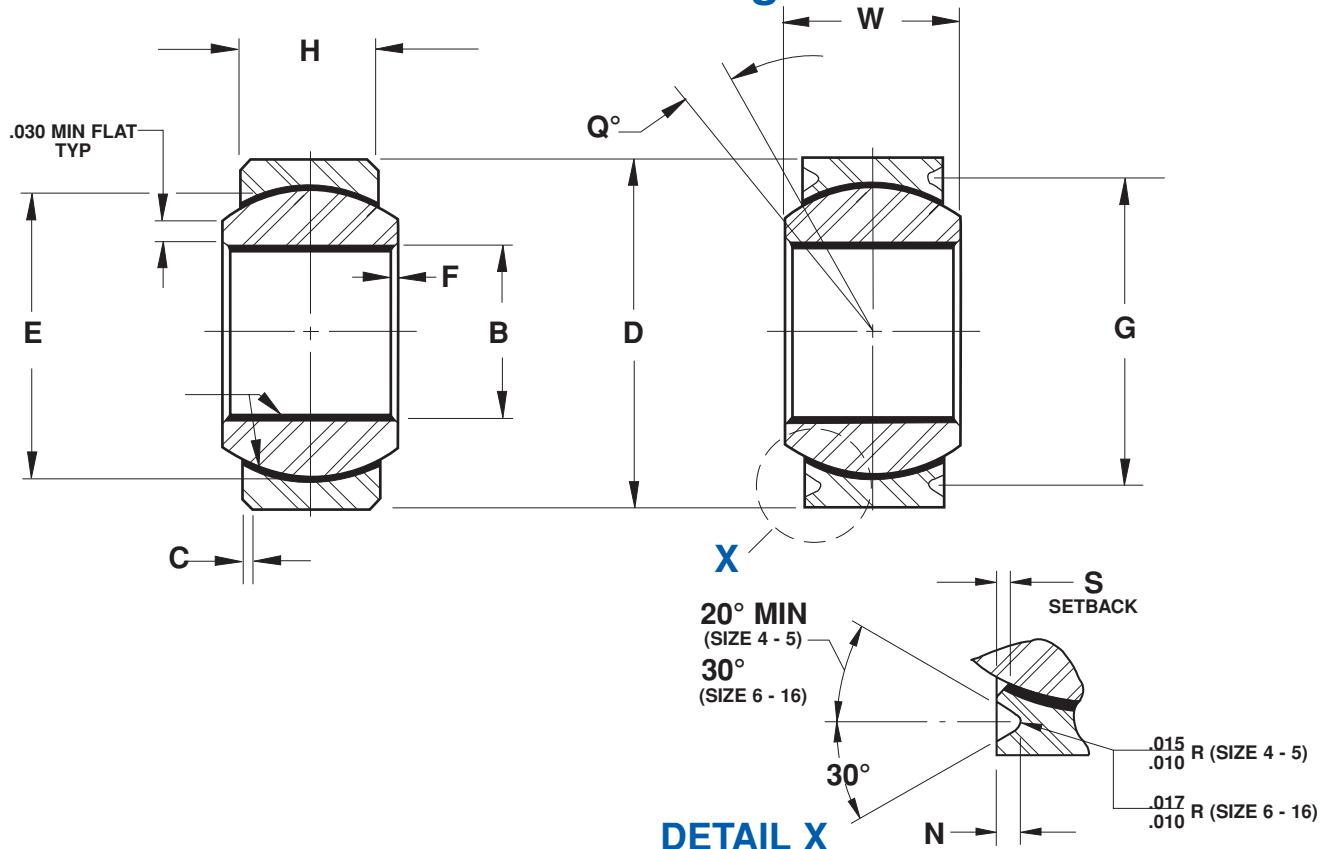

SPHERICAL  
BEARINGS

	OTHER DIMENSIONS					Q	STATIC LIMIT LOAD		OSCILLATING LOAD	NO LOAD ROTATIONAL BREAKAWAY TORQUE (RANGE)	APPROX WEIGHT
	G	S	F	N	C		RADIAL	AXIAL			
.000 -.008	MAX	MAX		+ .000 -.010	+ .005 -.005	DEG MIN			LBF	IN-LBS	LBS
.594	.030	.010		.025	.015	10	5,550	430	2,650	1-5	.02
.660	.030	.010		.035	.015	10	7,700	700	3,700	1-15	.03
.712	.035	.025		.035	.025	9	10,200	1,100	4,900	1-15	.04
.806	.035	.025		.035	.025	8	12,950	1,400	6,700	1-15	.05
.876	.035	.025		.055	.025	8	17,250	2,100	8,250	1-15	.07
.970	.040	.025		.055	.025	8	22,150	3,680	10,600	1-15	.09
1.063	.040	.025		.055	.025	8	27,700	4,720	13,250	1-15	.12
1.313	.045	.025		.055	.035	8	40,600	6,750	19,400	1-15	.21
1.438	.045	.025		.055	.035	8	55,950	9,350	26,750	1-25	.27
1.626	.045	.025		.055	.035	9	73,800	12,160	35,250	1-25	.39

NOTES

- ① For liner specification, see page 52
- ② Heim is qualified to supply this part and all variations per SAE-AS81820 (formerly MIL-B-81820)

# Military Series

## (MS14102, MS14103)

### Self-Lubricating



SPHERICAL  
BEARINGS

#### Series WE, WEG

PLAIN		GROOVED		DIMENSIONS IN INCHES							
HEIM PART NO	MS14102 DASH NO	HEIM PART NO	MS14103 DASH NO	BORE	D	W	H	N			
				.B.	.+.0000 -.0005	.+.0000 -.0005	.+.000 -.002	.+.005 -.005	.+.000 -.010		
<b>WE3</b>	3	<b>WEG3</b>	3	.1900	.6250	.437	.327	.025			
<b>WE4</b>	4	<b>WEG4</b>	4	.2500	.6250	.437	.327	.025			
<b>WE5</b>	5	<b>WEG5</b>	5	.3125	.6875	.437	.317	.035			
<b>WE6</b>	6	<b>WEG6</b>	6	.3750	.8125	.500	.406	.035			
<b>WE7</b>	7	<b>WEG7</b>	7	.4375	.9375	.562	.442	.035			
-	-	<b>WEG7A</b>	7A	.4375	.9062	.562	.442	.035			
<b>WE8</b>	8	<b>WEG8</b>	8	.5000	1.0000	.625	.505	.035			
<b>WE9</b>	9	<b>WEG9</b>	9	.5625	1.1250	.687	.536	.035			
<b>WE10</b>	10	<b>WEG10</b>	10	.6250	1.1875	.750	.567	.035			
<b>WE12</b>	12	<b>WEG12</b>	12	.7500	1.3750	.875	.630	.055			
<b>WE14</b>	14	<b>WEG14</b>	14	.8750	1.6250	.875	.755	.055			
<b>WE16</b>	16	<b>WEG16</b>	16	1.0000	2.1250	1.375	1.005	.055			

Outer Member: 17-4PH Stainless steel heat treated


Ball: 440C Stainless steel heat treated

Liner: Self-lubricating "E" UNIFLON® per SAE-AS81820 (formerly MIL-B-81820)

# Military Series

## (MS14102, MS14103)

### Self-Lubricating

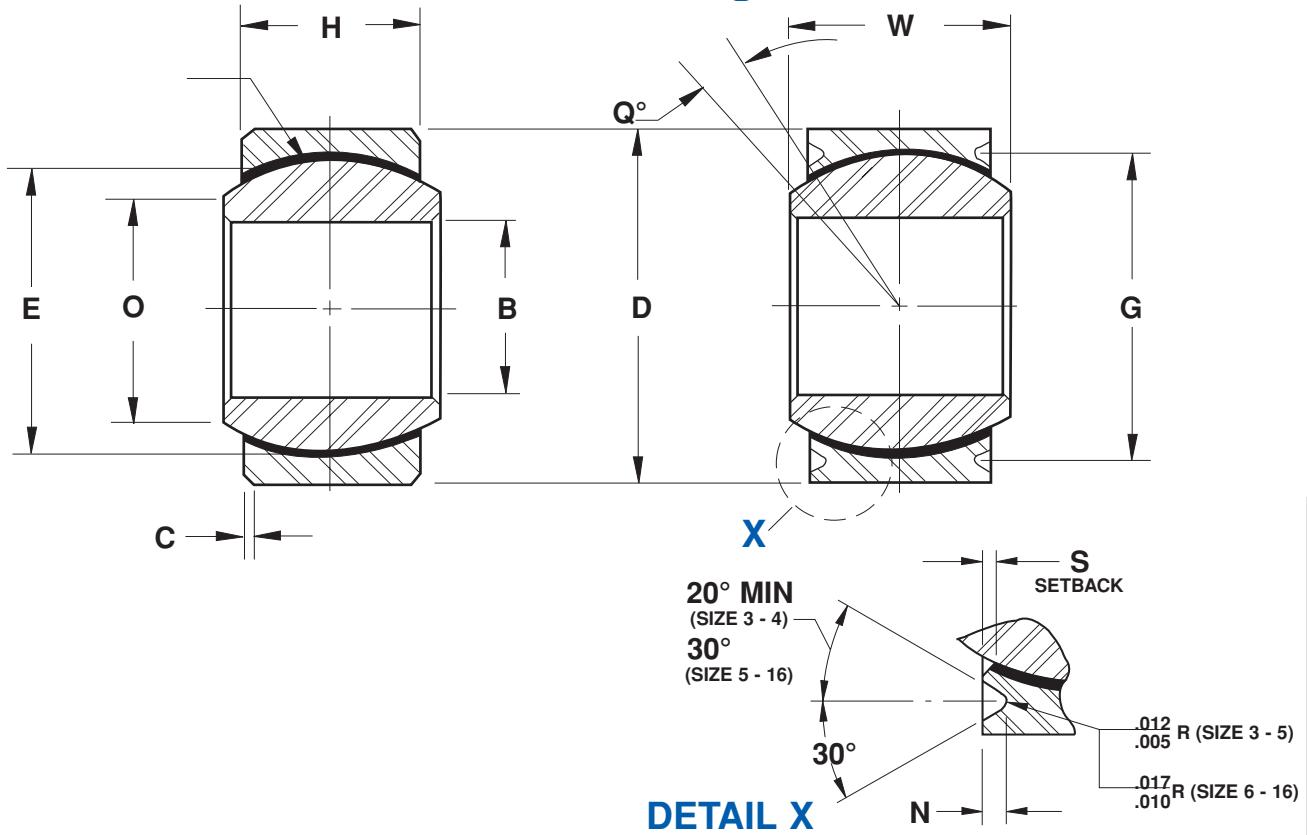

SPHERICAL  
BEARINGS

OTHER DIMENSIONS			BALL DIAMETER	BALL FLAT DIAMETER		STATIC LIMIT LOAD		OSCILLATING LOAD	NO LOAD ROTATIONAL BREAKAWAY TORQUE (RANGE)	APPROX WEIGHT
G	C	S	E	O	Q	LBF		LBF	IN-LBS	LBS
.000	+.005		REF	REF	DEG MIN	RADIAL	AXIAL			
- .008	-.005	MAX								
.563	.015	.030	.531	.300	15	2,500	1,770	4,990	0.25-5	.031
.563	.015	.030	.531	.300	15	5,500	1,770	4,990	0.25-5	.031
.625	.015	.030	.593	.401	14	9,400	1,640	6,050	0.25-8	.035
.712	.025	.035	.687	.466	8	13,700	2,630	8,310	0.25-8	.060
.837	.025	.035	.781	.537	10	20,700	3,650	11,750	0.25-8	.080
.806	.025	.035	.781	.537	10	19,700	3,650	11,750	0.25-8	.080
.900	.025	.045	.875	.607	9	21,400	4,970	14,950	0.25-8	.100
1.025	.025	.040	1.000	.721	10	26,600	5,370	18,100	0.25-8	.135
1.087	.025	.040	1.062	.747	12	29,000	6,130	20,250	0.25-8	.160
1.251	.035	.045	1.250	.887	13	37,000	7,730	26,200	0.25-8	.240
1.501	.035	.045	1.375	1.061	6	65,200	10,800	33,600	0.25-12	.350
2.001	.035	.045	1.875	1.269	12	104,000	19,300	56,520	0.25-12	.970

NOTES

① For liner specification, see page 52

② Heim is qualified to supply this part and all variations per SAE-AS81820  
(formerly MIL-B-81820)

# Military Series

## (M81820/2, M81820/3)

### Self-Lubricating



SPHERICAL  
BEARINGS

#### Series WEE, WEEG

PLAIN		GROOVED		DIMENSIONS IN INCHES					
HEIM PART NO	M81820/2 DASH NO	HEIM PART NO	M81820/3 DASH NO	BORE	OUTSIDE DI- AMETER	BALL WIDTH	HOUSING WIDTH	BALL DIAMETER	
				<b>B</b>	<b>D</b>	<b>W</b>	<b>H</b>	<b>E</b>	REF
<b>WEE7</b>	7	<b>WEEG7</b>	7	.4385	.9375	.562	.442	.781	
-	-	<b>WEEG7A</b>	7A	.4385	.9062	.562	.442	.781	
<b>WEE8</b>	8	<b>WEEG8</b>	8	.5010	1.0000	.625	.505	.875	
<b>WEE9</b>	9	<b>WEEG9</b>	9	.5635	1.1250	.687	.536	1.000	
<b>WEE10</b>	10	<b>WEEG10</b>	10	.6260	1.1875	.750	.567	1.062	
<b>WEE12</b>	12	<b>WEEG12</b>	12	.7510	1.3750	.875	.630	1.250	
<b>WEE14</b>	14	<b>WEEG14</b>	14	.8760	1.6250	.875	.755	1.375	
<b>WEE16</b>	16	<b>WEEG16</b>	16	1.0010	2.1250	1.375	1.005	1.875	

Outer Member: 17-4PH Stainless steel heat treated


Ball: PH13-8MO Stainless steel heat treated

Liner: Self-lubricating "E" UNIFLON® per SAE-AS81820 (formerly MIL-B-81820)

# Military Series

## (M81820/2, M81820/3)

### Self-Lubricating

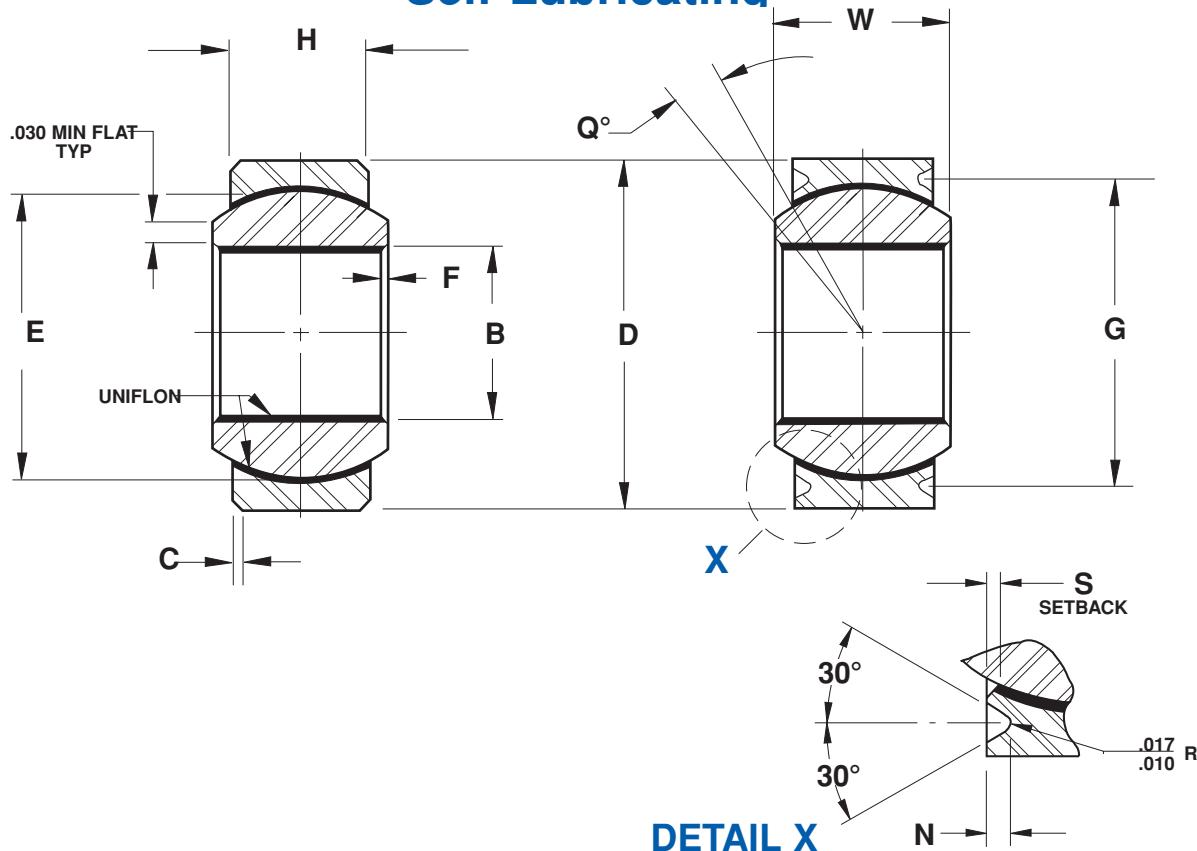

SPHERICAL  
BEARINGS


	OTHER DIMENSIONS					Q	STATIC LIMIT LOAD		OSCILLATING LOAD	NO LOAD ROTATIONAL BREAKAWAY TORQUE (RANGE)	APPROX WEIGHT
	G	S	F	N	C		RADIAL	AXIAL			
.000 -.008	MAX	MAX		+.000 -.010	+.005 -.005	DEG MIN	10	17,300	3,650	8,250	1-15
.837	.035	.025		.035	.025		10	17,300	3,650	8,250	.08
.806	.035	.025		.035	-		9	21,400	4,970	10,600	1-15
.900	.035	.025		.035	.025		10	26,600	5,370	13,200	.10
1.025	.040	.025		.035	.025						.14
1.087	.040	.025		.035	.025	12	29,000	6,130	16,150	1-15	.16
1.251	.045	.025		.055	.035	13	37,000	7,730	24,800	1-15	.24
1.501	.045	.025		.055	.035	6	56,000	10,800	26,750	1-25	.35
2.001	.045	.025		.055	.035	12	103,000	19,300	49,300	1-25	.97

#### NOTES

- ① For liner specification, see page 52
- ② Heim is qualified to supply this part and all variations per SAE-AS81820 (formerly MIL-B-81820)

# Metric Precision Series

## Four Piece - Metal to Metal

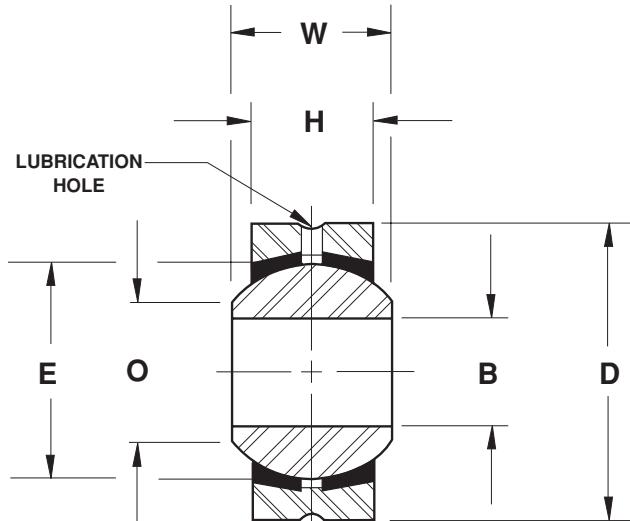

### Series SS

SPHERICAL BEARING NUMBER	DIMENSIONS IN MILLIMETERS						MAXIMUM STATIC RADIAL LOAD daN	APPROX WEIGHT g
	BORE <b>B</b>	OUTSIDE DIAMETER <b>D</b>	BALL WIDTH <b>W</b>	HOUSING WIDTH <b>H</b>	BALL DIAMETER <b>E</b>	BALL FLAT DIAMETER <b>O</b>		
	H7	h6	.000 -.130	.000 -.130	REF	REF		
<b>SS5</b>	5	16	8	6	11.11	7.71	780	9
<b>SS6</b>	6	18	9	6.75	12.70	8.96	980	12
<b>SS8</b>	8	22	12	9	15.88	10.40	1,670	24
<b>SS10</b>	10	26	14	10.5	19.05	12.92	2,350	38
<b>SS12</b>	12	30	16	12	22.23	15.43	3,140	57
<b>SS14</b>	14	34	19	13.5	25.40	16.86	4,020	83
<b>SS16</b>	16	38	21	15	28.58	19.39	5,000	110
<b>SS18</b>	18	42	23	16.5	31.75	21.89	6,180	150
<b>SS20</b>	20	46	25	18	34.92	24.38	7,360	200
<b>SS22</b>	22	50	28	20	38.10	25.84	8,830	250
<b>SS25</b>	25	56	31	22	42.85	29.60	11,080	360

Outer Ring: Carbon steel, with protective coating for corrosion resistance

Ball: Chrome steel, heat treated

Inserts: Brass

#### NOTES

- ① Also available
  - stainless steel
  - teflon liner
  - chrome plated ball
  - reduced play
- consult factory for information

# Spherical Bearing Technical Data

## RADIAL LOAD

The maximum static radial load is calculated using the following formula:

$$R = E \times H \times X$$

## STATIC AXIAL LOAD

The maximum static axial load is calculated using the following formulae:

- Axial Strength (A)

1. For four piece insert construction bearings

$$A = .78 [(E + .176H)^2 - E^2] \times X$$

2. For two piece (cartridge type) bearings

$$A = .65(H^2) \times X$$

Where:

E = Ball Diameter

H = Housing Width

X = Allowable Stress (see table below)

## MATERIAL STRESS TABLE

Material	Allowable Stress (PSI)
Brass	30,000
Aluminum Bronze	35,000
300 Series Stainless Steel	35,000
Low Carbon Steel	52,000
Alloy Steel	140,000

## MILITARY SPECIFICATIONS

Many of the processes used by Heim in the manufacture of spherical bearings are performed to U.S. Military Specifications. A partial list of these specifications follows:

PROCESS	Performed in accordance with:
Anodize	SAE-AMS-A-8625 Type 1 or 2 (formerly MIL-A-8625 Type 1 or 2)
Cadmium Plate	SAE-AMS-QQ-P-416 Type 1 Class 2 (formerly QQ-P-416)
Chrome Plate	SAE-AMS-C-320 Class 2 (.0002 min) (formerly QQ-C-320)
Heat Treat	SAE-AMS-H-6875 (formerly MIL-H-6875) SAE-AMS-H-7199 (formerly MIL-H-7199)
Magnetic Particle Inspection	ASTM-E-1444
Penetrant Inspection	ASTM-1417 (formerly MIL-I-6866)

## HOUSING BORES

SPHERICAL BEARING SIZE	BEARING OD D	HOUSING BORE			
		STEEL		ALUMINUM	
	+.0000 -.0005	MAX	MIN	MAX	MIN
<b>Series LS</b>					
3	.6250	.6245	.6241	.6244	.6239
4	.7500	.7495	.7491	.7494	.7489
5	.8750	.8745	.8741	.8744	.8739
6	1.0000	.9995	.9991	.9994	.9989
7	1.1875	1.1870	1.1865	1.1869	1.1863
8	1.3125	1.3120	1.3115	1.3119	1.3113
10	1.5625	1.5620	1.5613	1.5619	1.5611
12	2.2500	2.2495	2.2488	2.2494	2.2486
16	2.3750	2.3745	2.3738	2.3744	2.3736
19	2.6250	2.6245	2.6238	2.6244	2.6236
24	3.2500	3.2495	3.2488	3.2494	3.2486
30	4.0000	3.9995	3.9988	3.9994	3.9986
<b>Series LSS, LHA, LHB, LHSS, COM, COS, LHSSE, LHSSVV</b>					
2	.4687	.4682	.4678	.4681	.4676
3	.5625	.5620	.5616	.5619	.5614
4	.6562	.6557	.6553	.6556	.6551
5	.7500	.7495	.7491	.7494	.7489
6	.8125	.8120	.8116	.8119	.8114
7	.9062	.9057	.9053	.9056	.9051
8	1.0000	.9995	.9991	.9994	.9989
9	1.0937	1.0932	1.0928	1.0931	1.0926
10	1.1875	1.1870	1.1866	1.1869	1.1864
12	1.4375	1.4370	1.4366	1.4369	1.4364
14	1.5625	1.5620	1.5616	1.5619	1.5614
16	1.7500	1.7495	1.7491	1.7494	1.7489



## MISALIGNMENT SPECIFICATIONS

The angle of misalignment in a spherical bearing is calculated somewhat differently from that of the rod end because the housing is not spherical. There are three different types of mountings in which these bearings may be used as shown, and the angle of misalignment is governed by the type of mounting adopted.


Shown below are the common mountings for spherical bearings and the corresponding formula for calculating the angle of misalignment.

SPHERICAL BEARING PART NUMBER	MAXIMUM MISALIGNMENT (+/- DEGREES)		
	$b_1$	$b_2$	$b_3$
<b>LS</b>			
3	9.0	16.5	34.5
4	8.0	14.5	29.0
5	9.0	14.0	30.0
6	8.0	12.5	27.0
7	6.5	11.0	25.0
8	7.5	12.5	23.0
10	8.0	12.0	23.0
12	9.0	15.0	27.0
16	6.5	10.0	25.0
19	6.0	8.5	23.5
24	5.0	7.0	23.0
30	5.0	7.0	25.0
<b>LSS, LHA, LHB, LHSS, COM, COS, LHSSE, LHSSVV</b>			
2	8.5	13.5	28.0
3	7.0	11.0	29.5
4	9.0	13.0	30.0
5	8.0	12.0	26.0
6	7.5	10.5	23.5
7	6.5	9.5	20.5
8	7.0	10.0	20.0
9	7.5	10.0	20.0
10	7.0	9.0	19.0
12	7.0	9.0	21.0
14	7.0	9.0	16.0
16	7.5	9.5	16.0
<b>LHD</b>			
16	6.5	8.5	26.0
19	6.0	8.0	25.5
20	6.0	8.0	23.0
24	6.0	8.0	21.0
28	6.0	8.0	19.0
32	6.0	8.5	19.0


### Reference Letters

B = Bore of ball  
 C = Chamfer on outer race  
 D = Head diameter or diameter of outer race


E = Ball diameter  
 H = Housing width  
 $\sqrt{V} = \sqrt{(D - 2C)^2 + H^2}$   
 W = Ball width

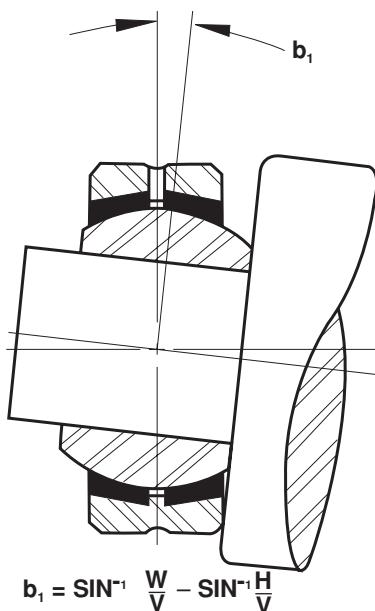

$$b_1 = \sin^{-1} \frac{W}{V} - \sin^{-1} \frac{H}{V}$$

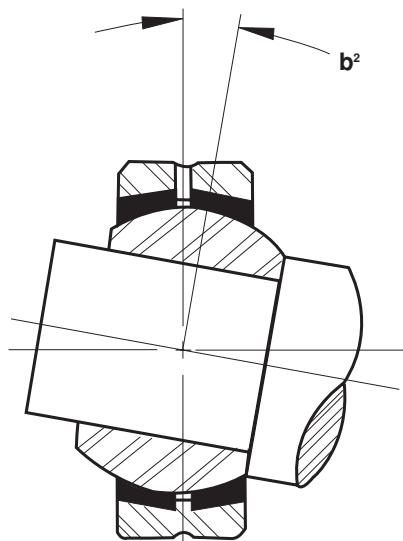

$$b_2 = \sin^{-1} \frac{W}{E} - \sin^{-1} \frac{H}{E}$$

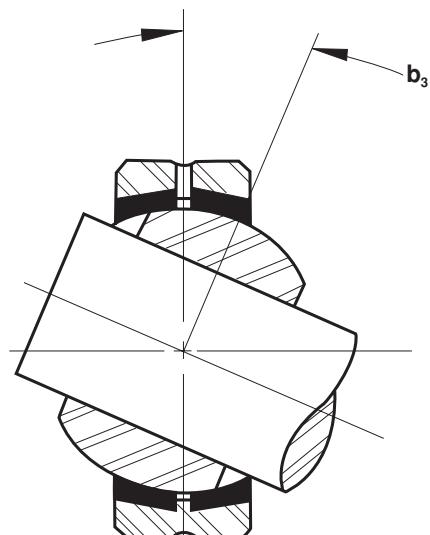

$$b_3 = \cos^{-1} \frac{B}{E} - \sin^{-1} \frac{H}{E}$$

# General Information

## Sleeve Bearings

### Sleeve Bearings

Heim manufactures sleeve bearings in a wide range of materials and sizes for industrial, agricultural, and aerospace applications. Pages 50 and 51 describe two standard series of self-lubricating bearings that utilize UNIFLON® Type E liner material. This liner meets the requirements of SAE-AS81820 (formerly MIL-B-81820). In addition to these standard plain and flanged series, Heim designs and manufactures "specials" to meet specific customer requirements. Working either from a drawing, application description or sample part, Heim also applies UNIFLON® liners to customer supplied bearings.

### Lined Sleeve Bearings (Bushings) - Characteristics

UNIFLON® liners in sleeve bearings eliminate the need for lubricating the bearings during their useful life. The UNIFLON® liner is a cost effective solution to many design problems where lubrication is impractical or undesirable. UNIFLON® lined sleeve bearings are ideal for applications where periodic shock loads or vibrations are encountered. Heim's new Type E liner is recommended for sleeve bearing applications where temperatures range from -65°F to 350°F. UNIFLON® liners are highly resistant to most chemical solvents encountered in bearing applications. UNIFLON® lined sleeve bearings have a lower coefficient of friction than metal-to-metal lubricated bearings. For additional information on UNIFLON® liner characteristics see page 52. You are encouraged to consult Heim's engineering department for recommendations on specific application problems.



### Shaft Data

An important factor influencing the life of UNIFLON® lined sleeve bearings is the condition of the mating shaft. It is recommended that the shaft have a surface finish of 8 RMS or better and a minimum surface hardness of Rc 40. Commonly preferred shaft materials are hardened corrosion resistant steels, hard anodized aluminum and any metal accepting hard chrome or nickel plate. The mating component should be designed such that there are not sharp edges which could damage the liner during assembly of the sleeve bearing. Cross binding or edge loading on the bearing should be avoided.


### Design Inquiry

To request an engineering design on a specific application, submit either a drawing or sketch or submit the pertinent information. All requests will receive prompt design engineering attention and follow-up.

# Military Series

## (M81934/1)

### Plain Self-Lubricating

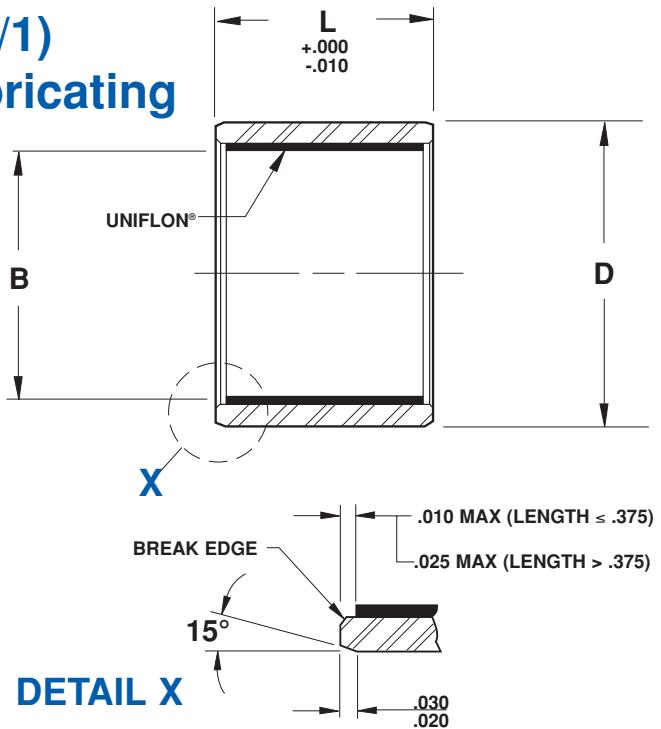

**Series PBE**

BASIC HEIM NUMBER	DIMENSIONS IN INCHES				WEIGHT LB/IN (REF) $L=1.000$	
	BORE NOMINAL SIZE	BORE	OUTSIDE DIAMETER			
		B	D	ALUM +.0005 -.0005	CRES +.0000 -.0005	
<b>PBE04</b>	.2515	.3760	.3760	.006	.016	
<b>PBE05</b>	.3140	.4386	.4386	.007	.019	
<b>PBE06</b>	.3765	.5012	.5012	.008	.022	
<b>PBE07</b>	.4390	.5638	.5638	.009	.025	
<b>PBE08</b>	.5015	.6265	.6265	.011	.028	
<b>PBE09</b>	.5640	.6892	.6892	.012	.031	
<b>PBE10</b>	.6265	.8142	.8142	.021	.056	
<b>PBE11</b>	.6890	.8767	.8767	.022	.060	
<b>PBE12</b>	.7515	.9393	.9393	.024	.065	
<b>PBE14</b>	.8765	1.0645	1.0645	.028	.075	
<b>PBE16</b>	1.0015	1.1898	1.1898	.031	.084	
<b>PBE18</b>	1 1/8	1.1265	1.3148	.035	.094	
<b>PBE20</b>	1 1/4	1.2515	1.4398	.038	.103	
<b>PBE22</b>	1 3/8	1.3765	1.5648	.041	.113	
<b>PBE24</b>	1 1/2	1.5015	1.7523	.062	.171	
<b>PBE26</b>	1 5/8	1.6265	1.8773	.067	.183	
<b>PBE28</b>	1 3/4	1.7515	2.0023	.071	.196	
<b>PBE32</b>	2	2.0015	2.2523	.081	.222	

**Sleeve:** "A": Aluminum alloy

Anodize or Chemical film treatment

"C": 17-4PH Stainless steel, heat treated

**Liner:** Self-lubricating "E" UNIFLON® per SAE-AS81820  
(formerly MIL-B-81820)

#### NOTES

① Must add material code and length code to basic Heim part number to complete product identification when ordering

Material Code: "A" for Aluminum

"C" for CRES

Length Code: in multiples of 1/32 inches (Refer to "L" on the drawing)

EXAMPLE: PBE04A08 (M81934/1-04A008)

1/4 inch bore, Aluminum, 1/4 inch long


② For liner specification, see page 52

③ Heim is qualified to supply this product and all variations to SAE-AS81934  
(formerly MIL-B-81934)

# Military Series

## (M81934/2)

### Flanged Self-Lubricating

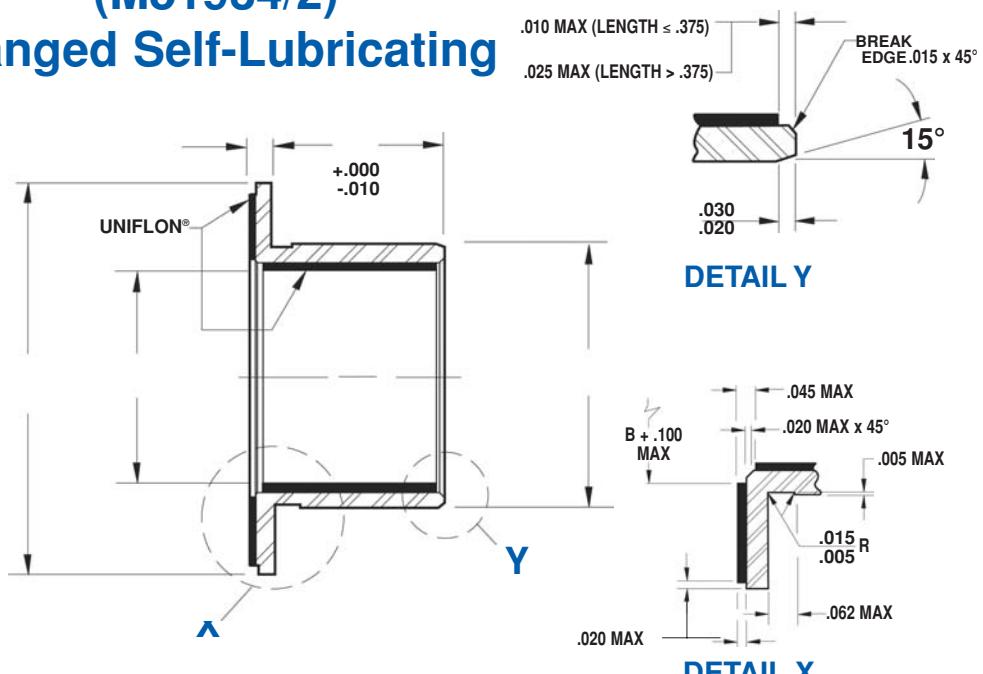

#### Series FBE

BASIC HEIM NUMBER	BORE NOMINAL SIZE	DIMENSIONS IN INCHES					SLEEVE WEIGHT LB/IN (REF) L=1.000	FLANGE WEIGHT LBS (REF)		
		BORE	SHOULDER DIAMETER		FLANGE WIDTH	FLANGE DIAMETER				
			B	D						
<b>FBE04</b>	1/4	.2515	.3760	.3760	.0625	.750	.006	.016	.002	.006
<b>FBE05</b>	5/16	.3140	.4386	.4386	.0625	.812	.007	.019	.003	.007
<b>FBE06</b>	3/8	.3765	.5012	.5012	.0625	.875	.008	.022	.003	.007
<b>FBE07</b>	7/16	.4390	.5638	.5638	.0625	.937	.009	.025	.003	.008
<b>FBE08</b>	1/2	.5015	.6265	.6265	.0625	1.000	.011	.028	.003	.009
<b>FBE09</b>	9/16	.5640	.6892	.6892	.0625	1.125	.016	.031	.004	.011
<b>FBE10</b>	5/8	.6265	.8142	.8142	.0625	1.250	.021	.056	.005	.014
<b>FBE11</b>	11/16	.6890	.8767	.8767	.0625	1.375	.022	.060	.006	.016
<b>FBE12</b>	3/4	.7515	.9393	.9393	.0625	1.500	.024	.065	.007	.020
<b>FBE14</b>	7/8	.8765	1.0645	1.0645	.0625	1.625	.028	.075	.008	.022
<b>FBE16</b>	1	1.0015	1.1898	1.1898	.0625	1.750	.031	.084	.009	.024
<b>FBE18</b>	1 1/8	1.1265	1.3148	1.3148	.0937	1.875	.035	.094	.015	.041
<b>FBE20</b>	1 1/4	1.2515	1.4398	1.4398	.0937	2.000	.038	.103	.016	.045
<b>FBE22</b>	1 3/8	1.3765	1.5648	1.5648	.0937	2.125	.041	.113	.017	.048
<b>FBE24</b>	1 1/2	1.5015	1.7523	1.7523	.0937	2.250	.062	.171	.018	.051
<b>FBE26</b>	1 5/8	1.6265	1.8773	1.8773	.0937	2.375	.067	.183	.020	.055
<b>FBE28</b>	1 3/4	1.7515	2.0023	2.0023	.0937	2.500	.071	.196	.021	.058
<b>FBE32</b>	2	2.0015	2.2523	2.2523	.0937	2.750	.081	.222	.023	.065

**Sleeve:** "A": Aluminum alloy

Anodize or Chemical film treatment

"C": 17-4PH Stainless steel, heat treated

**Liner:** Self-lubricating "E" UNIFLON® per SAE-AS81820  
(formerly MIL-B-81820)

#### NOTES

① Must add material code and length code to basic Heim part number to complete product identification when ordering

Material Code: "A" for Aluminum

"C" for CRES

Length Code: in multiples of 1/32 inches (Refer to "L" on the drawing)

EXAMPLE: PBE04A08 (M81934/1-04A008)

1/4 inch bore, Aluminum, 1/4 inch long

② For liner specification, see page 52

③ Heim is qualified to supply this product and all variations to SAE-AS81934  
(formerly MIL-B-81934)

**SLEEVE  
BEARINGS**

# Technical Data

## Self-Lubricating Bearings

### UNIFLON® - Self-Lubricating Fabric Liners

To meet the increasing technical demands on self-lubricating bearings, Heim has developed UNIFLON® Type E, a new and improved liner material. Heim's Type E is qualified to procurement specification SAE-AS81820 (formerly MIL-B-81820).

UNIFLON® Type E is unique in the family of teflon type bearing material. Type E is a low coefficient of friction composite of three materials. Most composite bearing materials consist of one layer of low coefficient of friction material usually teflon fiber, layered or interwoven with either a highly abrasive fabric such as fiberglass, or a low-load bearing fabric such as dacron, coated with resin. Type E combines a low coefficient of friction, high tensile, high compressive strength fabric with chemically bonded teflon fiber to form the Type E matrix.

### Why UNIFLON® TYPE E?

UNIFLON® Type E liner is recommended over other bearing materials for the following reasons.

1. High teflon fiber content. Teflon has the lowest coefficient of friction of known materials today.
2. The bonding material is a polyallomer consisting of two polymers. One polymer provides adhesive properties. The second polymer provides the correct degree of elasticity.
3. The backing or basic high strength fabric in Type E has an inherent coefficient of friction only slightly higher than teflon (.019).


### Where are UNIFLON® Type E Bearings used?

Type E bearings are designed for use in low surface speed high unit loading where metal to metal is limited or non-desirable. Type E bearings are available with ratings in high static unit loads up to 60,000 psi. For specific radial and dynamic load ratings on Type E bearings, consult the Heim engineering department. UNIFLON® Type E can be used with many combinations of hardened steel, aluminum, titanium and plated surfaces, in many environments, and in temperatures -100°F to 350°F.

### Type "VV" Liner


For less demanding or higher temperature applications, Heim recommends its Type "VV" liner. The higher temperature Type "VV" carbon filled liner is particularly suited for high frequency and low load applications in temperatures from -65°F to 500°F.

### Coefficient of Friction vs. Temperature

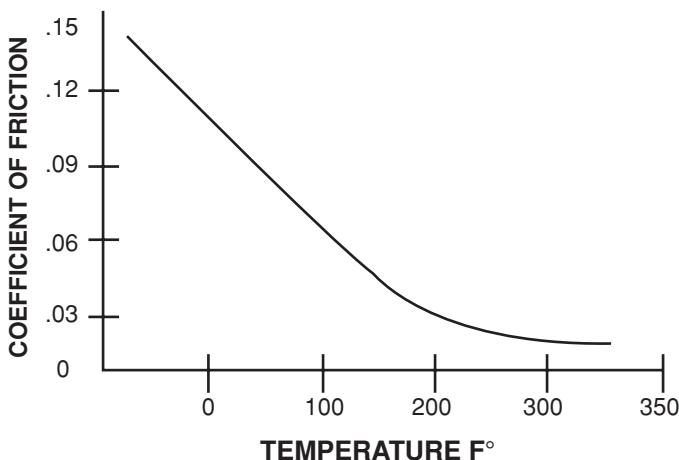

The chart above shows the coefficient of friction of UNIFLON® Type E liner and how this low friction fabric dramatically improves with increasing temperature.

### Wear vs. Oscillations

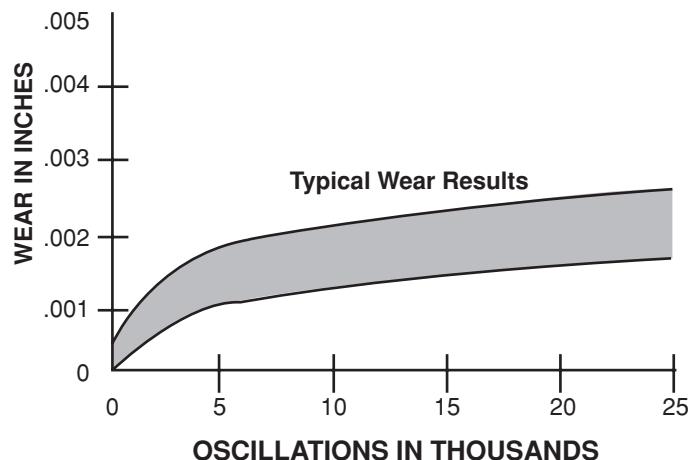


This chart shows a typical wear pattern of UNIFLON® Type E liner and how it varies with the number of oscillations.

# Commercial Series

## UNIBAL® Ball Bearings

Heim's UNIBAL® ball bearings offer many of the performance advantages of precision ground bearings at unground bearing prices. Heim's unique, full complement, deep groove design makes this bearing an ideal replacement for costly precision

ground bearings in high load, low speed applications. Burnished races provide smooth operation. Heim UNIBAL® ball bearings may be used as an economical upgrade from conventional unground ball bearings where increased precision and smoothness are required.

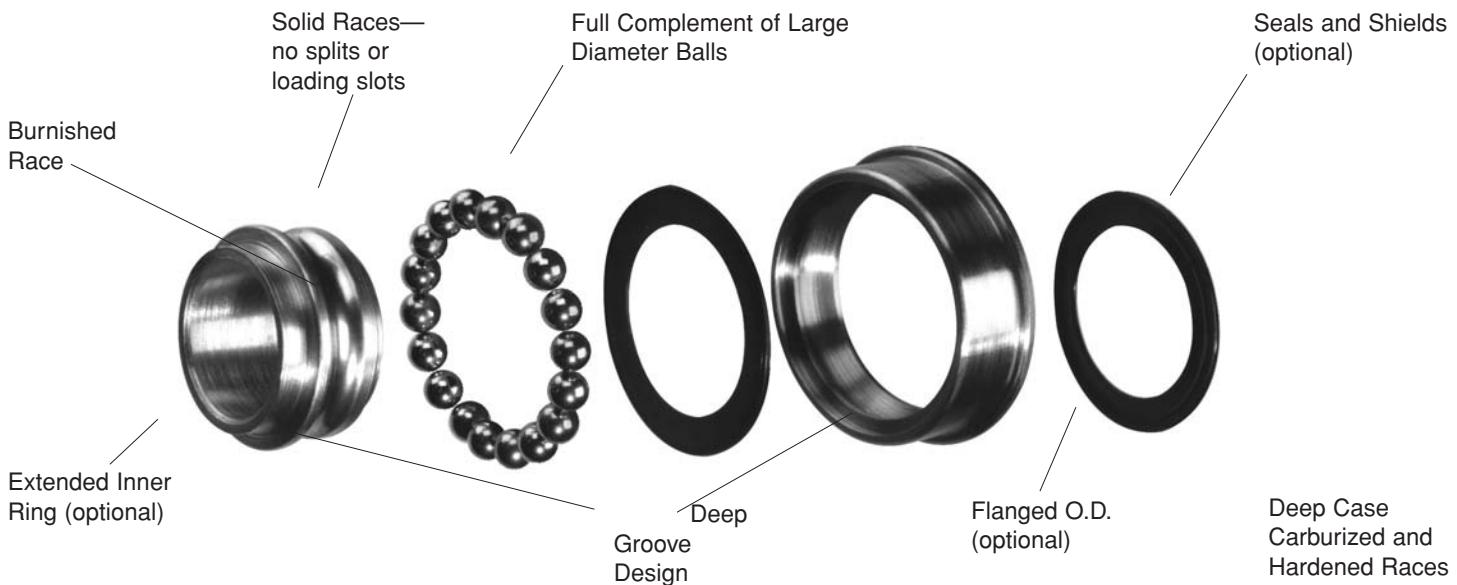

### Long Life and High Loads

Burnished races uninterrupted by splits or loading slots, a full complement of large diameter balls, and deep carburized and hardened raceways give the Heim UNIBAL® ball bearing superior ability to handle high loads and provide longer service life.

### Thrust Loads

Heim's unique design and assembly method provides deep ball grooves in both races and no loading slots, yielding greater ability to accommodate thrust loads.

### Smooth Operation

The burnished races of the Heim ball bearings provide far smoother operation than other unground ball bearings. This feature may allow a Heim design to be used in place of precision ground bearings in many applications.

### Easy Mounting

Optional flanged O.D.s are available to simplify housing design and mounting. Heim UNIBAL® ball bearings are also available with extended inner rings to allow clevis mounting.

### Sealing

Shields and seals are available as options to retain lubricant and exclude contamination.

Do you require a special design for either the inner or outer race? Please contact your local RBC Sales Engineer or Heim directly tap into over 30 years of design and manufacturing experience.


Sample Applications:

- wheels**
- casters**
- ammunition loaders**
- textile machines**
- door closers**
- power tools**
- conveyors**
- wheelchairs**
- pulleys**
- lift mechanisms**



# Commercial Series

## Plain Ball Bearing

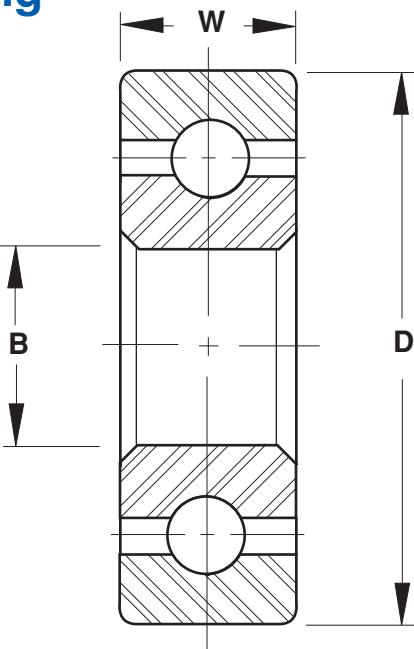

### Series R

BALL BEARING NUMBER	BORE	OUTSIDE DIAMETER	WIDTH	BALLS	LOAD CAPACITY IN LBF					
					B	D	W	50	100	
	+.004 +.001	+.002 -.002	+.005 -.005		NO	DIA		300	600	1000
<b>R385</b>	3/16	1/2	5/32	11	3/32	120	95	50	35	20
<b>R3106</b>	3/16	5/8	3/16	10	1/8	180	140	75	55	30
<b>R4118</b>	1/4	11/16	1/4	12	1/8	225	175	90	65	40
<b>R5148</b>	5/16	7/8	1/4	15	1/8	255	200	105	75	45
<b>R6148</b>	3/8	7/8	1/4	16	1/8	270	220	110	80	50
<b>R514.510</b>	5/16	29/32	5/16	13	5/32	340	270	135	100	60
<b>R614.510</b>	3/8	29/32	5/16	13	5/32	340	270	135	100	60
<b>R61610</b>	3/8	1	5/16	14	5/32	360	280	145	110	65
<b>R71610</b>	7/16	1	5/16	14	5/32	360	280	145	110	65
<b>R6178</b>	3/8	1 1/16	1/4	15	5/32	375	290	155	115	65
<b>R7178</b>	7/16	1 1/16	1/4	15	5/32	375	290	155	115	65
<b>R61812</b>	3/8	1 1/8	3/8	16	5/32	390	310	165	120	70
<b>R71812</b>	7/16	1 1/8	3/8	16	5/32	390	310	165	120	70
<b>R81812</b>	1/2	1 1/8	3/8	16	5/32	390	310	165	120	70
<b>R82214</b>	1/2	1 3/8	7/16	17	3/16	560	450	230	170	100
<b>R102214</b>	5/8	1 3/8	7/16	17	3/16	560	450	230	170	100
<b>R122214</b>	3/4	1 3/8	7/16	18	3/16	600	480	245	180	110
<b>R82414</b>	1/2	1 1/2	7/16	13	1/4	800	620	325	240	145
<b>R102414</b>	5/8	1 1/2	7/16	13	1/4	800	620	325	240	145
<b>R102612</b>	5/8	1 5/8	3/8	15	1/4	880	700	350	260	160
<b>R122612</b>	3/4	1 5/8	3/8	15	1/4	880	700	350	260	160
<b>R122818</b>	3/4	1 3/4	9/16	16	1/4	900	730	375	275	170
<b>R143016</b>	7/8	1 7/8	1/2	17	1/4	950	750	390	280	175
<b>R143216</b>	7/8	2	1/2	19	1/4	1050	820	430	310	180
<b>R163216</b>	1	2	1/2	19	1/4	1050	820	430	310	180

Outer Ring: Carbon steel, case hardened

#### NOTES

- ① Check with factory for product availability
- ② Add letter "P" to suffix to indicate one seal. Example: RF102214P
- ③ Add letters "PP" to suffix to indicate two seals. Example: RF102214PP
- ④ Add letters "MP" to suffix to indicate mechanical shield. Example: RF102214MP

Inner Ring: Carbon steel, case hardened


Balls: Carbon steel, case hardened

Seals: Synthetic rubber, if required

Shields: Steel, if required

# Commercial Series

## Flanged Ball Bearing

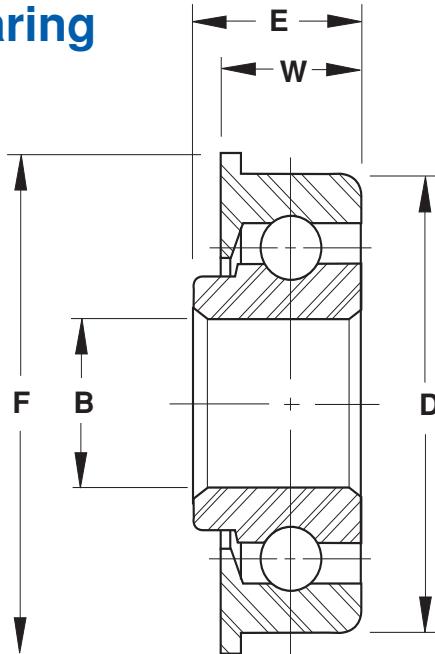

### Series RF

BALL BEARING NUMBER	BORE	OUTSIDE DIAMETER	WIDTH	FLANGE DIAMETER	OVERALL WIDTH	BALLS	LOAD CAPACITY IN LBF					
	B	D	W	F	E		NO	DIA	50	100	300	600
	+.004 +.001	+.002 -.002	+.005 -.005	+.005 -.005	+.010 -.010							1000
<b>RF3106</b>	3/16	5/8	3/16	3/4	1/4	10	1/8	180	140	75	55	30
<b>RF4118</b>	1/4	11/16	1/4	25/32	5/16	12	1/8	225	175	90	65	40
<b>RF5148</b>	5/16	7/8	1/4	1	5/16	15	1/8	255	200	105	75	45
<b>RF6148</b>	3/8	7/8	1/4	1	5/16	16	1/8	270	220	110	80	50
<b>RF514.512</b>	5/16	29/32	3/8	1	7/16	13	5/32	340	270	135	100	60
<b>RF614.512</b>	3/8	29/32	3/8	1	7/16	13	5/32	340	270	135	100	60
<b>RF61712</b>	3/8	1 1/16	3/8	1 3/16	7/16	15	5/32	375	290	155	115	65
<b>RF71712</b>	7/16	1 1/16	3/8	1 3/16	7/16	15	5/32	375	290	155	115	65
<b>RF61812</b>	3/8	1 1/8	3/8	1 1/4	7/16	16	5/32	390	310	165	120	70
<b>RF71812</b>	7/16	1 1/8	3/8	1 1/4	7/16	16	5/32	390	310	165	120	70
<b>RF81812</b>	1/2	1 1/8	3/8	1 1/4	7/16	16	5/32	390	310	165	120	70
<b>RF82214</b>	1/2	1 3/8	7/16	1 1/2	1/2	17	3/16	560	450	230	170	100
<b>RF102214</b>	5/8	1 3/8	7/16	1 1/2	1/2	17	3/16	560	450	230	170	100
<b>RF122214</b>	3/4	1 3/8	7/16	1 1/2	1/2	18	3/16	600	480	245	180	110
<b>RF82414</b>	1/2	1 1/2	7/16	1 5/8	1/2	13	1/4	800	620	325	240	145
<b>RF102414</b>	5/8	1 1/2	7/16	1 5/8	1/2	13	1/4	800	620	325	240	145
<b>RF122414</b>	3/4	1 1/2	7/16	1 5/8	1/2	16	7/32	720	580	300	220	130
<b>RF102616</b>	5/8	1 5/8	1/2	1 3/4	9/16	15	1/4	880	700	350	260	160
<b>RF122616</b>	3/4	1 5/8	1/2	1 3/4	9/16	15	1/4	880	700	350	260	160
<b>RF102816</b>	5/8	1 3/4	1/2	1 7/8	9/16	16	1/4	900	730	375	275	170
<b>RF122816</b>	3/4	1 3/4	1/2	1 7/8	9/16	16	1/4	900	730	375	275	170
<b>RF103016</b>	5/8	1 7/8	1/2	2	9/16	17	1/4	950	750	390	280	175
<b>RF163016</b>	1	1 7/8	1/2	2	9/16	18	1/4	1000	800	410	300	185
<b>RF143216</b>	7/8	2	1/2	2 1/8	9/16	19	1/4	1050	820	430	310	190
<b>RF163216</b>	1	2	1/2	2 1/8	9/16	19	1/4	1050	820	430	310	190

**Outer Ring:** Carbon steel, case hardened

#### NOTES

- ① Check with factory for product availability
- ② Add letter "P" to suffix to indicate one seal. Example: RF102214P
- ③ Add letters "PP" to suffix to indicate two seals. Example: RF102214PP
- ④ Add letters "MP" to suffix to indicate mechanical shield. Example: RF102214MP

**Inner Ring:** Carbon steel, case hardened


**Balls:** Carbon steel, case hardened

**Seals:** Synthetic rubber, if required

**Shields:** Steel, if required

# Special Purpose Series

## Extra Capacity Ball Bearing

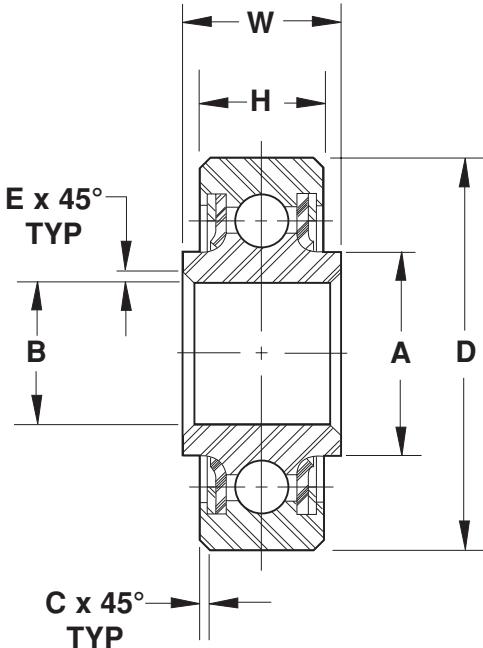

### Series HK A

BALL BEARING NUMBER	BORE	OUTSIDE DIAMETER	WIDTH OUTER RING	WIDTH INNER RING	CORNER OUTER RING	CORNER INNER RING	SHOULDER DIAMETER INNER RING	BALLS		LOAD CAPACITY		APPROX WEIGHT LBS
										RADIAL	THRUST	
								B	D	H	W	
<b>HK3A</b>	.1900	.6250	.234	.297	.016	.005	.297	10	1/8	1,560	700	0.01
<b>HK4A</b>	.2500	.7500	.219	.281	.016	.005	.340	12	1/8	1,880	900	0.02
<b>HK5A</b>	.3125	.8125	.234	.297	.016	.015	.415	14	1/8	2,190	1,000	0.02
<b>HK6A</b>	.3750	.8750	.250	.313	.016	.015	.483	16	1/8	2,500	1,100	0.03
<b>HK8A</b>	.5000	1.1250	.313	.375	.016	.015	.615	16	5/32	3,910	1,700	0.05
<b>HK10A</b>	.6250	1.3750	.344	.406	.032	.015	.740	14	7/32	6,700	3,000	0.08
<b>HK12A</b>	.7500	1.6250	.375	.437	.032	.015	.915	15	1/4	9,380	4,100	0.13
<b>HK16A</b>	1.0000	2.0000	.438	.500	.032	.015	1.230	19	1/4	11,900	5,200	0.22
<b>HK20A</b>	1.2500	2.2500	.438	.500	.032	.015	1.490	22	1/4	13,800	6,100	0.26

*Outer and Inner Rings: Chrome steel, heat treated with protective coating for corrosion resistance on all surfaces exposed after installation*

#### NOTES


① Check with factory for product availability

**Balls:** Chrome steel, heat treated


**Seals:** Synthetic rubber

**Shields:** Steel, with protective coating for corrosion resistance


# Ball Bearing Applications

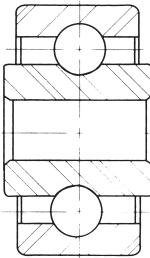


**Cam Follower:** High load capacity at low speed.

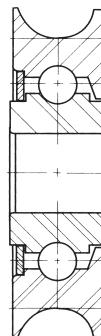

**Sliding Window:** Outer race serves as a pulley eliminating a component.




**Door Closer:** Unitized design allows for easy installation.

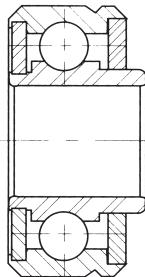


**Cargo Roller:** Economical replacement for precision bearing.




**Radial Arm Saw:** Outer race rides in a track to provide guidance.




**Coin Changer:** Double row design with soft races to allow the bearing to be staked in place.

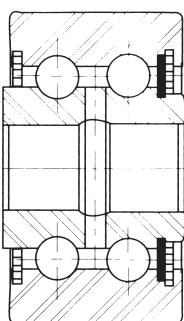

**Crane Trolley:** Ball bearing design provides axial load capability.

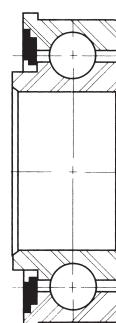

**Tractor Wheel:** Unbroken races provide strength and durability.

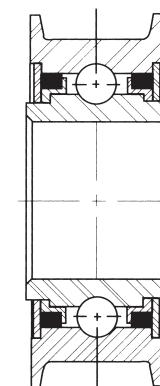

**Textile Loom:** Integral idler pulley and positive sealing economical replacement.

## Special Bearings



A special flanged ball bearing with a knurled O.D. which offers superior retention.



A helicopter bearing with special retention provisions for mounting.



This aircraft flanged spherical bearing uses a threaded O.D. to provide a retention feature. The threaded O.D. also allows for ease of replacement in the application.



A ball bearing with a concave outer ring for use as a guide roller.



This special ball bearing with an integral stud in the bore is for ease of customer assembly.



A helicopter swash plate bearing. The teflon liner in the I.D. of the outer race and the bore of the ball accommodates misalignment and linear motion.



This special rod end is for aircraft applications. It utilizes two flush type lubricators for ease of maintenance.

A custom designed double ended bearing may eliminate the need for combining a male and a female rod end in a given application. The bearing may be assembled in customer supplied components.



An aircraft series bearing with a keyway. Keyways may also be furnished on female rod ends. Heim has more than 1,000 approvals for aircraft bearing applications.



Custom lining is available for customer supplied assemblies. A suspension bearing for a U.S. Army tank application. The threaded ears provide an easy method of attachment.

## **Notes**

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

# Notes

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

# Innovation. Commitment. Quality.

RBC Bearings has been producing bearings in the USA since 1919. In addition to unique custom bearings, RBC offers a full line of standard industrial and aerospace bearings, including:



## Spherical Plain Bearings

Radial, angular contact, extended inner ring, high misalignment. **QuadLube®**, **ImpactTuff®**, **SpreadLock® Seal**, **CrossLube®**, **DuraLube™**, **MillTuff™** bearings, and self-lubricating bearings. Available in inch and metric sizes.



## Thin Section Ball Bearings

Standard cross sections to one inch. Sizes to 40 inches. Stainless steel and other materials are available. Seals are available on all sizes and standard cross sections.



## Self-Lubricating Bearings

Radial, thrust, rod ends, spherical bearings, high temperature, high loads. Available in inch and metric sizes.

**Fiberglide®**



## Airframe Control Bearings

Ball bearing types, self-lubricating types, needle roller track rollers.



## Dowel Pins, Loose Needle Rollers, Shafts

**Precision Products** dowel pins, loose needle rollers, and shafts.



## Ball Screws

Precision ground, rolled, ball splines. Long life, low wear, high accuracy. **QuickTurn® Ball Screw Repair Service**.



## Rod Ends

Commercial and industrial, precision, Mil-Spec series, self-lubricating, and aircraft. **Heim®**, **Unibal®**, and **Spherco®** brands. Available in inch and metric sizes.




## Ball Bearings

Precision ground, semiground, unground. High loads, long life, smooth operation. **Nice™** brand is offered in caged and full complement configurations.



## Cam Followers

Standard stud, heavy stud, yoke type, caged roller followers. Patented **RBC Roller®** cylindrical roller cam followers, **HexLube®** universal cam followers, airframe track rollers.



## Needle Roller Bearings

**Pitchlign®** caged heavy duty needle roller bearings, inner rings, **TJ** **TandemRoller®** bearings for long life.



## Tapered Roller and Thrust Bearings

**Tyson®** brand case-hardened and through-hardened tapered roller bearings. RBC tapered thrust bearings. Available in many sizes. Used in Class 8 heavy truck and trailer wheel bearings, gearboxes, and final drive transmissions.



## Specials

RBC manufactures many specialty bearings for the aerospace, oil and energy, semiconductor equipment, packaging, heavy truck, and other industries.