
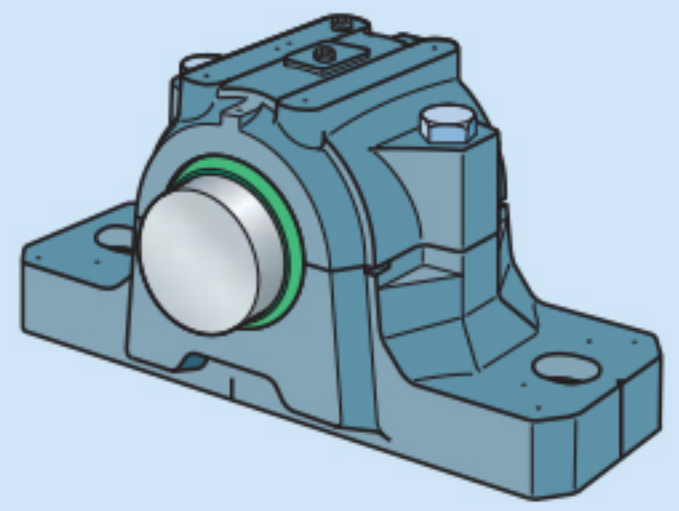
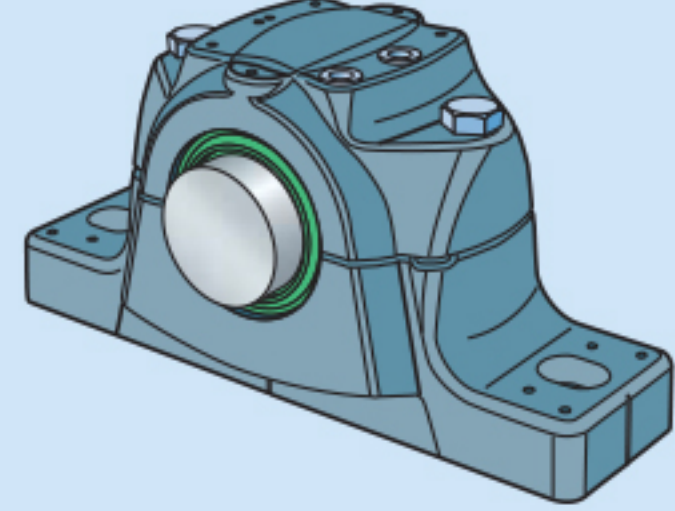
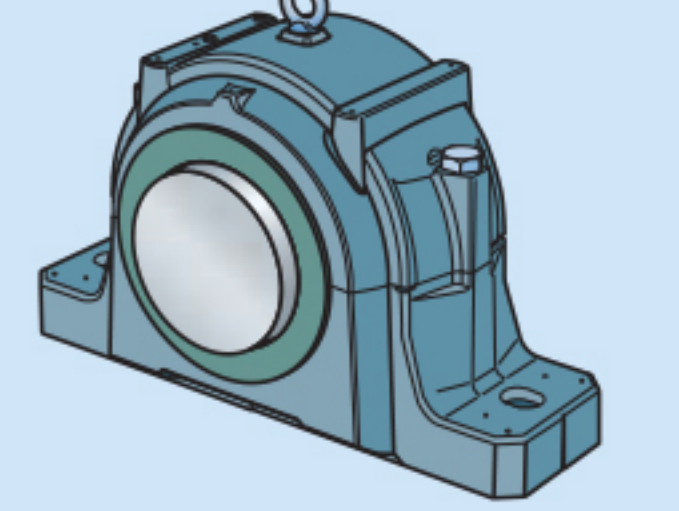
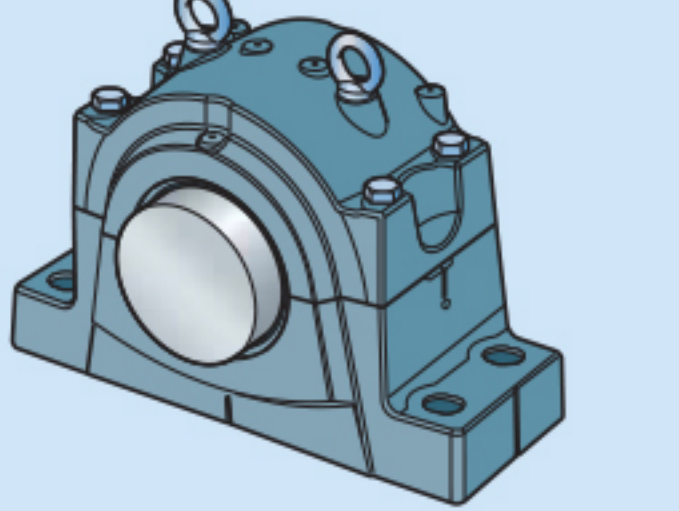
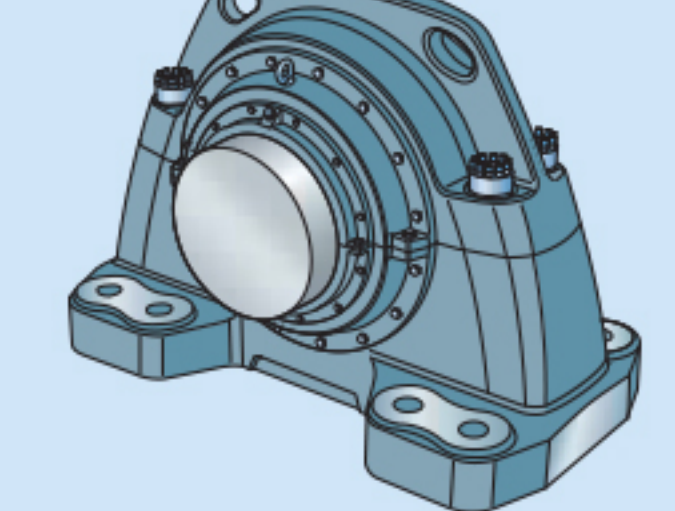
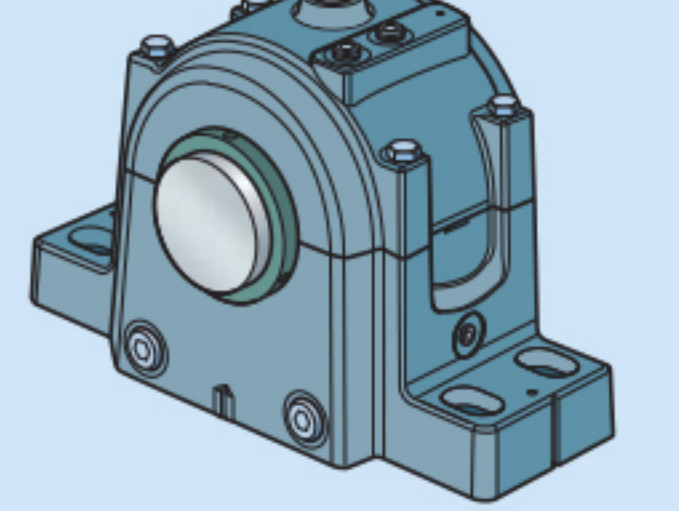
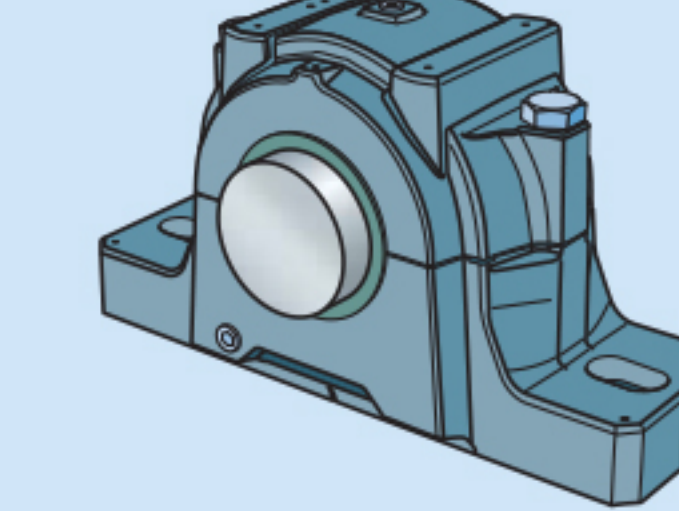


Split plummer (pillow) block housings

								
Series	SNL 2, 3, 5 and 6	SE 2, 3, 5 and 6	SNLN 30	SNL 30, 31 and 32	SED	SONL	SAF, SAW	SDAF
Chapter	2	3	4	5	6	7	8	9
Bearing types								
Self-aligning ball bearing	✓	✓	–	–	–	✓	✓	–
Spherical roller bearing	✓	✓	✓	✓	✓	✓	✓	✓
CARB bearing	✓	✓	✓	✓	✓	✓	✓	✓
Shaft diameter range								
from [mm]	20 and 60	30	110	115	430	75	40	85
to [mm]	30 and 160	75	280	530	900	240	220	530
from [in.]	3/4 and 2 3/16	1 5/16	–	4 7/16	–	2 15/16	1 3/16	2 15/16
to [in.]	1 and 5 1/2	2 1/2	–	19 1/2	–	8 15/16	10 1/2	20
Shaft-bearing combination								
Bearing on an adapter sleeve	✓	✓	✓	✓	✓	✓	✓	✓
Bearing on a withdrawal sleeve	✓	✓	✓	✓	–	–	–	–
Bearing on a cylindrical seat	✓	✓	✓	✓	✓	✓	✓	✓
Sealing solutions								
Lip seal	✓	✓	✓ ¹⁾	–	–	–	–	–
Radial shaft seal	–	–	–	–	–	–	✓	✓
V-ring seal	✓	✓	✓ ¹⁾	–	–	–	–	–
Felt seal	✓	✓	✓ ¹⁾	–	–	–	–	–
Labyrinth seal	✓	✓	✓	✓	–	✓	✓	✓
Taconite heavy-duty seal	✓	✓	✓	✓	–	–	✓	✓
Multi-seal	–	–	–	–	✓	–	–	–
Lubrication								
Grease	✓	✓	✓	✓	✓	–	✓	✓
Oil	optional	optional ²⁾	–	✓	✓	✓	✓	✓
Materials								
Grey cast iron	standard	standard	standard	standard	–	standard	standard	standard
Spheroidal graphite cast iron	optional	optional	optional	optional	–	optional	optional	optional
Cast steel	–	–	–	–	–	–	–	–
Mounting								
No attachment bolts	✓	✓	✓	–	–	–	–	–
Two-bolt mounting	✓	✓	✓	–	–	–	✓	–
Four-bolt mounting	✓	✓	✓	✓	–	✓	✓	✓
Eight-bolt mounting	–	–	–	–	✓	–	–	–
Supersedes (SKF)	SNH, SNA, SN	SNL 2,3,5 and 6, SNH, SNA, SN	SN 30	SD, SDD	–	SOFN 2, 5	–	–
Replacement for (non-SKF)	ISO 113 standard housing	ISO 113 standard housing	ISO 113 standard housing	ISO 113 standard housing	–	–	–	–

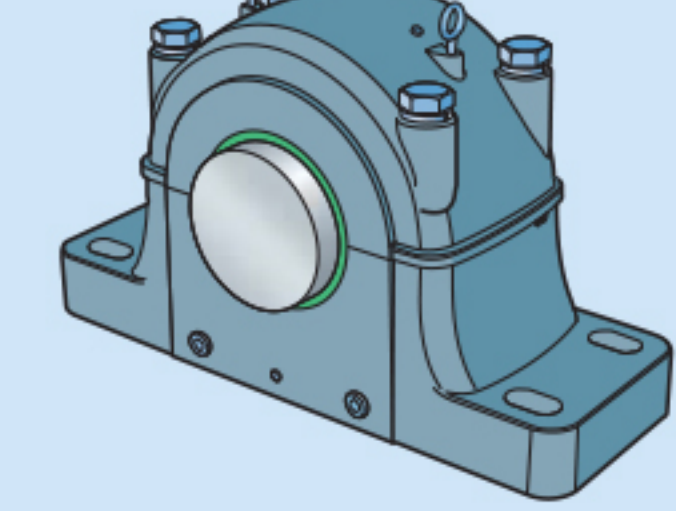

1) Not available for sizes 34 and above.
2) For sizes 518 to 532 circulating oil only.